

Industriefunkuhren



Technical Manual

GPS System 6844 and 6844RC

For Housing Versions
1HE / 3HE / Table / Wall

ENGLISH

Version: 01.01 – 03.08.2010

Valid for GPS System 6844(RC) with FIRMWARE Version: **01.xx**

Version number (Firmware / Manual)

THE FIRST TWO DIGITS OF THE VERSION NUMBER OF THE TECHNICAL MANUAL AND THE FIRST TWO DIGITS OF THE FIRMWARE VERSION MUST COMPLY WITH EACH OTHER. THEY INDICATE THE FUNCTIONAL CORRELATION BETWEEN DEVICE AND TECHNICAL MANUAL.

THE DIGITS AFTER THE POINT IN THE VERSION NUMBER INDICATE CORRECTIONS IN THE FIRMWARE / MANUAL THAT ARE OF NO SIGNIFICANCE FOR THE FUNCTION.

Downloading Technical Manuals

All current manuals of our products are available free of charge via our homepage on the Internet.

Homepage: <http://www.hopf.com>

E-mail: info@hopf.com

Symbols and Characters



Operational Reliability

Disregard may cause damages to persons or material.



Functionality

Disregard may impact function of system/device.



Information

Notes and Information.



Safety regulations

The safety regulations and observance of the technical data serve to ensure trouble-free operation of the device and protection of persons and material. It is therefore of utmost importance to observe and compliance with these regulations.

If these are not complied with, then no claims may be made under the terms of the warranty. No liability will be assumed for any ensuing damage.



Safety of the device

This device has been manufactured in accordance with the latest technological standards and approved safety regulations

The device should only be put into operation by trained and qualified staff. Care must be taken that all cable connections are laid and fixed in position correctly. The device should only be operated with the voltage supply indicated on the identification label.

The device should only be operated by qualified staff or employees who have received specific instruction.

If a device must be opened for repair, this should only be carried out by employees with appropriate qualifications or by *hopf Elektronik GmbH*.

Before a device is opened or a fuse is changed all power supplies must be disconnected.

If there are reasons to believe that the operational safety can no longer be guaranteed the device must be taken out of service and labelled accordingly.

The safety may be impaired when the device does not operate properly or if it is obviously damaged.

CE-Conformity



This device fulfils the requirements of the EU directive 2004/108/EG "Electromagnetic compatibility" and 2006/95/EG "Low voltage equipment".

Therefore the device bears the CE identification marking (CE = Communautés Européennes = European communities)

The CE indicates to the controlling bodies that the product complies with the requirements of the EU directive - especially with regard to protection of health and safety for the operator and the user - and may be released for sale within the common markets.

Contents	Page
1 Description of System 6844 and 6844RC	11
1.1 Difference between Systems 6844 and 6844RC	13
1.2 Structure of Housing Options	14
1.2.1 Differences between the Housing Options	14
1.2.2 System Design 6844(RC) in 19 inch Rack 3U/42HP and 3U/84HP	15
1.2.2.1 19 Inch Rack 3U/42HP and 3U/84HP	17
1.2.2.2 Display and Keypad	18
1.2.2.3 System-Bus 6000	18
1.2.2.4 Slots for Function Boards	18
1.2.3 System Design 6844(RC) in 19 inch Rack 1U/42HP (Slim Line)	19
1.2.3.1 19 Inch Rack 1U/84HP	20
1.2.3.2 Display	20
1.2.3.3 Keypad	20
1.2.3.4 Status LEDs	21
1.2.3.5 System-Bus 6000	21
1.2.3.6 Function Board Slots	22
1.2.3.7 Temperature-controlled Forced Ventilation	22
1.2.4 System Design 6844(RC) in ½ 19 inch Table Top Housing 3U/42HP	23
1.2.4.1 ½ 19 Inch Table Top Housing 3U/42HP	23
1.2.5 System Design 6844(RC) in ½ 19 inch Wall Housing 3U/42HP	24
1.2.5.1 ½ 19 Inch Wall Housing 3HE/42TE	24
1.2.5.2 Slot for a Function Board	24
1.3 Quick Install	25
2 Installation.....	26
2.1 System 6844(RC) in 3U / Table-Top / Wall - Housing	26
2.1.1 Installation of the 19 Inch 3U Rack	26
2.1.2 Mounting the Wall Housing	26
2.1.3 Installing the Table-Top Housing	27
2.1.4 Earthing	27
2.1.5 AC Power Supply	28
2.1.5.1 Safety and Warning Instructions	28
2.1.5.2 Power Supply Unit Specifications	28
2.1.5.3 Fusing	28
2.1.6 DC Power Supply (Option)	29
2.1.6.1 Power Supply Unit Specifications	29
2.1.6.2 Fusing	29
2.1.7 Synchronization Source Connection (GPS)	29
2.1.8 COM0 / COM1 Serial Interfaces Connection	30
2.1.9 DCF77 Antenna Simulation (77.5kHz) Connection	30
2.1.10 Function Boards Connection	30
2.2 System 6844(RC) in 1U / Slim Line Housing	31
2.2.1 Installation of the 19 Inch Rack	31
2.2.2 Earthing	31
2.2.3 AC Power Supply	31
2.2.3.1 Safety and Warning Instructions	32
2.2.3.2 Power Supply Unit Specifications	32
2.2.3.3 Fusing	32
2.2.4 DC Power Supply (Option)	33
2.2.4.1 Power Supply Unit Specifications	33
2.2.4.2 Fusing	33
2.2.4.3 Reverse Voltage Protection	33
2.2.5 Synchronization Source Connection (GPS)	34
2.2.6 COM0 / COM1 Serial Interfaces Connection	34
2.2.7 Error Relays Connection	34

2.2.8 DCF77 Antenna Simulation (77.5kHz) Connection	34
2.2.9 Function Boards Connection.....	34
3 Commissioning	35
3.1 General Procedure.....	35
3.2 Switching on the Operating Power Supply	35
3.3 Display after System Start/Reset (Firmware)	36
3.3.1 Standard Display without Valid Time	36
3.3.2 Standard Display with Valid Time	36
3.3.3 Standard Display with Valid Time and Active ERROR-Byte.....	37
3.4 Keypad Functions	38
3.4.1 Keypad Layout	38
3.4.2 Key Assignment	38
3.4.3 Keypad Inputs / Main Menu Activation.....	39
3.5 Initialization	39
4 System Parameterization and Operation.....	40
4.1 Menu Structure.....	40
4.2 SET Menu - Basic Settings System 6844(RC).....	42
4.2.1 Fail-safe Storage of Data Entries.....	42
4.2.2 Input Time / Date.....	42
4.2.3 Input Local Time to UTC Time Offset (Time Zone).....	43
4.2.4 Input Daylight Saving Time (DST) Changeover.....	44
4.2.5 Input Position	45
4.2.6 Input SyncOFF Timer - Delayed Change of Sync.-Status	46
4.2.7 Serial Interface Parameters	47
4.2.7.1 Selection Frames for Parameters of Serial Interface COM0.....	47
4.2.7.2 Selection Frames for COM1 Serial Interface Parameters	47
4.2.8 LAN Board Parameters (Option).....	48
4.2.8.1 Selection Frames for LAN Board 1 Parameters.....	48
4.2.8.2 Selection Frames for LAN Board 2 Parameters.....	48
4.2.8.3 Selection Frame Parameters of the LAN Management Board/Module (System 6844RC only)	49
4.2.9 Frequency Output (Option)	50
4.2.10 Status and Pulse Output	50
4.2.11 Selection of the Time Base for the LCD-Display	52
4.2.12 Selection of the Language for the Time Display on the LCD-Display.....	52
4.2.12.1 SYSTEM Byte	52
4.2.12.2 Keyword Function for Keypad.....	53
4.3 SHOW Menu - Display of the System 6844(RC) Base Settings	54
4.3.1 Satellite Values (GPS)	55
4.3.2 ERROR Byte	56
4.3.3 Position	58
4.3.4 Time Offset (Time Zone)	58
4.3.5 Daylight Saving Time (DST) Changeover.....	58
4.3.6 SyncOFF Timer – Delayed Change of Sync. Status	59
4.3.7 Serial Interface Parameters	60
4.3.7.1 Display Frames for the COM0 Serial Interface Parameters.....	60
4.3.7.2 Display Frames for the COM1 Serial Interface Parameters	60
4.3.8 LAN Board Parameters	61
4.3.8.1 Display Frames for LAN Board 1 Parameters	61
4.3.8.2 Display Frames for LAN Board 2 Parameters	61
4.3.8.3 Display Frames for LAN Management Board Parameters (System 6844RC only)	62
4.3.9 Frequency Output (Option)	63
4.3.10 Status and Pulse Output	63
4.3.11 SYSTEM Byte	63

4.3.12 ADD.Outputs (Digital I/O).....	64
4.3.13 ADD.Inputs (Digital I/O).....	64
4.4 S.CLOCK Menu - Control of Slave Clocks with Function Board 7406	65
4.5 INI Menu - System 6844(RC) Extended Settings/Functions	65
4.5.1 Display the Firmware Version of Board 6844(RC).....	65
4.5.2 Display the PCID (Product Config ID) of Board 6844(RC)	65
4.5.3 3D / Position-fix GPS Reception and Synchronization Mode	66
4.5.4 DCF77 Pulse (1Hz) / DCF77 Antenna Simulation (77.5kHz)	67
4.5.4.1 Signal DCF77.SYS / DCF77 Antenna Simulation (77.5kHz).....	67
4.5.4.1.1 Display and Set the DCF77.SYS Configuration	67
4.5.4.1.2 Display and Set DCF77.SYS TimeOFF	67
4.5.4.2 Signal DCF77.ADD (Option)	68
4.5.4.2.1 Display and Set DCF77.ADD Configuration	68
4.5.4.2.2 Display and Set DCF77.ADD TimeOFF	68
4.5.5 IRIG-B (Digital) Output.....	69
4.5.5.1 IRIG Time Code, Structure and Timing Diagram	69
4.5.5.1.1 IRIG-Bxxx Format Classes in accordance with IRIG Standard 200-04	70
4.5.5.1.2 IEEE1344-1995	70
4.5.5.1.3 AFNOR NFS 87-500	70
4.5.5.2 Display and Set IRIG-B.(1) Configuration	71
4.5.5.3 Display and Set IRIG-B.(1) TimeOFF	71
4.5.5.4 IRIG-B.(2) Configuration/TimeOFF (Option)	72
4.5.6 Activate LAN Management Board (Board 6844RC only).....	72
4.5.7 Trigger Reset / Default.....	73
4.5.7.1 Software-Reset (Control Board 6844(RC) only).....	73
4.5.7.2 Hardware-Reset (Complete System)	73
4.5.7.3 Trigger the GPS Receiver Default	73
4.5.7.4 Factory Default (Control Board 6844(RC) only)	73
5 COM0 / COM1 Serial Interfaces	74
5.1 Configuration of the Serial Interfaces / Pulse Output	74
5.1.1 Serial Transmission Parameters.....	74
5.1.2 Configuration of the Data String (Mode Byte)	75
5.1.2.1 Mode Byte 1 / Bit7 - Local Time or UTC in the Serial Output.....	76
5.1.2.2 Mode Byte 1 / Bit 6 - Serial Output Second Forerun.....	77
5.1.2.3 Mode Byte 1 / Bit 5 - Bit 5 currently no function	77
5.1.2.4 Mode Byte 1 / Bit 4 - Last Control Character at Second Change (On-Time Mark).....	77
5.1.2.5 Mode Byte 1 / Bit 3 - Reverse Control Characters CR and LF	77
5.1.2.6 Mode Byte 1 / Bit 2 - Delayed Transmission	77
5.1.2.7 Mode Byte 1 / Bit1-Bit0 - Data String Transmission Point of Time	78
5.1.2.8 Mode Byte 2 / Bit7: Output Mode DATA STRING / PULSES.....	78
5.1.2.9 Mode Byte 2 / Bit6-Bit0 - Data String Selection	78
5.1.2.10 Mode Byte 2 / Bit6-Bit0: Pulse Selection	79
5.1.2.11 Mode Byte 3 / Bit7-Bit0	80
5.1.3 Serial Data String Request	80
5.1.3.1 Serial Requests with ASCII Characters (<i>hopf</i> Standard and <i>hopf</i> 2000)	80
5.2 Data String Transmission Points of Time	81
5.3 Data Strings	82
5.3.1 General Information about Data Output of Board 6844(RC) GPS.....	82
5.3.2 <i>hopf</i> Standard String (6021).....	83
5.3.2.1 Specified Settings	83
5.3.2.2 Structure	83
5.3.2.3 Status.....	83
5.3.2.4 Example.....	84
5.3.3 <i>hopf</i> 2000 - 4 Digit Year Output.....	85
5.3.3.1 Specified Settings	85
5.3.3.2 Structure	85
5.3.3.3 Status.....	86
5.3.3.4 Example.....	86

5.3.4 <i>hopf</i> Master/Slave-String.....	87
5.3.4.1 Specified Settings	87
5.3.4.2 Structure	88
5.3.4.3 Status.....	89
5.3.4.4 Example.....	89
5.3.5 SINEC H1.....	90
5.3.5.1 Specified Settings	90
5.3.5.2 Structure	90
5.3.5.3 Status.....	91
5.3.5.4 Example.....	91
5.3.6 T-String	92
5.3.6.1 Specified Settings	92
5.3.6.2 Structure	92
5.3.6.3 Status.....	92
5.3.6.4 Example.....	92
5.3.7 IBM Sysplex Timer Model 1+2.....	93
5.3.7.1 Specified Settings	93
5.3.7.2 Structure	93
5.3.7.3 Status.....	94
5.3.7.4 Example.....	94
5.3.8 Data String ALOHA	95
5.3.8.1 Specified Settings	95
5.3.8.2 Structure	95
5.3.8.3 Status.....	95
5.3.8.4 Example.....	95
5.3.9 SINEC H1 Extended	96
5.3.9.1 Specified Settings	96
5.3.9.2 Structure	96
5.3.9.3 Status.....	97
5.3.9.4 Example.....	97
5.3.10 NMEA - GPRMC	98
5.3.10.1 Specified Settings	98
5.3.10.2 Structure	99
5.3.10.3 Status.....	100
5.3.10.4 Example.....	100
5.3.11 SAT 1703 Time String.....	101
5.3.11.1 Specified Settings	101
5.3.11.2 Structure	101
5.3.11.3 Status.....	102
5.3.11.4 Example.....	102
5.3.12 NMEA 0183 - GPZDA (V3.00)	103
5.3.12.1 Specified Settings	103
5.3.12.2 Structure	104
5.3.12.3 Example.....	105
5.3.13 GPS2000 Data String.....	106
5.3.13.1 Specified Settings	106
5.3.13.2 Structure	106
5.3.13.3 Status.....	107
5.3.13.4 Example.....	107
5.3.14 IEC-103 (ASDU Type 6)	108
5.3.14.1 Specified Settings	108
5.3.14.2 Structure	108
5.3.14.3 Example.....	109
5.3.14.4 Initialization String for IEC-103 (ASDU Type 6)	109
5.3.15 ABB-SPA Seconds-Clock	111
5.3.15.1 Specified Settings	111
5.3.15.2 Structure	112
5.3.15.2.1 Date and Time String	112
5.3.15.2.2 Second String	113
5.3.15.3 Status.....	113
5.3.15.4 Examples.....	113
5.3.15.4.1 Date and Time String	113
5.3.15.4.2 Second String	113

6 6844RC - Functionality	114
6.1 LAN Management Module 6844MNG for 1U System	115
6.2 LAN Management Board 6844MNG for 3U / Table / Wall Systems.....	115
7 Function Boards	116
7.1 Function Boards for System-Bus	117
7.2 Function Boards	117
7.3 Function Boards Summary.....	117
7.4 Exchanging a Function Board.....	118
7.5 Installation of an Additional Function Board.....	119
7.6 Removing Function Boards.....	119
8 System Indicators / Fault Analysis / Troubleshooting	120
8.1 Status and Fault Indicators	120
8.1.1 Status LEDs	120
8.1.1.1 "Power ON" LED (1U Systems only).....	120
8.1.1.2 "Sync. Status" LEDs (1U Systems only).....	120
8.1.1.3 LED Power Supply Unit (not for 1U)	120
8.1.2 LCD-Display	120
8.1.2.1 System Status on the Display.....	120
8.1.2.2 Number of Satellites	120
8.1.2.3 Position Display	121
8.1.2.4 SyncOFF Timer	121
8.1.2.5 Display of ERROR Byte	121
8.1.3 Error Relays (1U Systems only - Optional for 3U / Table-Top / Wall)	121
8.1.3.1 "Power" Relay.....	121
8.1.3.2 "Sync" Relay	121
8.1.4 Send LED.....	122
8.1.5 Auto-Reset Logic (System-Bus).....	122
8.1.6 Serial Output of Data Telegrams	123
8.1.7 RC Functionality (6844RC Systems only).....	123
8.2 Error Patterns.....	123
8.2.1 Complete Failure.....	123
8.2.2 "Power" / Power Supply LED "ON" - No Display and No Output.....	124
8.2.3 Power LED "ON" – No Display but Valid Signal Output	124
8.2.4 Power LED "ON" – Cyclical Flickering of the Displays	124
8.2.5 No GPS Reception / No Synchronization	125
8.2.6 No DCF77 Antenna Simulation (77.5kHz) / DCF77 Pulse (1Hz).....	126
8.2.7 No or Incorrect Serial Output	126
8.2.8 Incorrect Time Output	126
8.2.9 No Daylight Saving Time (DST) Changeover	127
8.2.10 Output and Function Errors of Individual Function Boards.....	127
8.3 Support from the <i>hopf</i> Company	127
9 Maintenance / Care	128
9.1 General Guidelines for Cleaning	128
9.2 Cleaning the Housing.....	128
9.3 Cleaning the Display and Keypad	128

10 Technical Data	129
10.1 Specific Technical Data for 3U / Table-Top / Wall.....	129
10.2 Specific Technical Data for 1U	130
10.3 General Technical Data 6844(RC)	131
11 Appendix	134
11.1 Factory-Default Values.....	134
11.2 GPS (Global Positioning System)	135
11.3 DCF77 (German Long-Wave Transmitter Frankfurt 77.5kHz)	136
11.3.1 DCF77 General	136
11.3.1.1 DCF77 Signal Structure	136
11.3.1.2 Advantages and Disadvantages DCF77	138
11.3.2 DCF77 Generation by <i>hopf</i> Clocks.....	138
11.3.2.1 DCF77 Signal Simulation.....	138
11.3.2.2 DCF77 Pulse (1Hz).....	138

1 Description of System 6844 and 6844RC

hopf GPS Systems 6844 and 6844RC offer a broad range of functionality combined with ease of integration and are suitable for the needs of modern industry and the current computer and network environment in which these systems are used.

Tried and tested worldwide, *hopf* GPS System 6842 served as the basis for the further development of *hopf* GPS Systems 6844 and 6844RC.

In designing the Systems, particular attention was paid to their potential for universal application combined with an optimal cost-benefit ratio for the different fields of use.

Furthermore, these Systems allow customized solutions to be created quickly and easily to meet specific project requirements.

Functionality

The functionality of the Systems ranges from the simple emission of serial strings or pulses to the sophisticated NTP time server with LAN management and monitoring as well as a variety of other complex applications.

A range of function boards are available for the respective applications which can be used to meet almost all customer requirements - from a simple pulse output in the widest possible variety of hardware applications to the highly accurate NTP time server.

Modularity

In their standard configurations, the Systems already offer appropriate modularity in terms of the use of different function boards, housings, power supplies and subsequent expandability.

The Systems can also be supplied with additional expansion options. This makes it possible to easily adapt the Systems in accordance with changing future requirements.

Housing Options

hopf GPS Systems 6844 and 6844RC are available to the customer in a variety of housing options to permit their use in almost any application.

Maintenance free

Complete maintenance free (no additional service costs) and high equipment reliability result in great flexibility and a high degree of availability.

Expansion

The System can be extended using Function Boards which can be added by the customer. In this way, functionality can be easily upgraded on site at low cost. Function Boards can also be exchanged directly on site. Direct account of the potential for subsequent local on-site expansion by the customer can be taken at the system design stage.

Customized System Structures

Based on the standard system, projects and special designs can be realized at low cost.

For this purpose, please consult the expert team at *hopf* Elektronik GmbH - now with the almost 40 years of experience in the field of time synchronization – we will be pleased to help.

Some of the System's base functions:

- Synchronization is possible with **one satellite** only
- Simple operation via **keypad** and **LCD-display** on the front panel
- All **cable connections** on the rear side (19 inch rack 1U/3U only)
- **DC Power Supply (Option)**
- Housing with additional **earth screw** for cables up to 16mm²
- Power input with **mains switch (1U only)** compliant with IEC/EN 60320-1/C14 and **EMI network noise filter**
- Prepared for **retrofitting** of Function Boards by the customer
- Up to two independent **NTP time servers** can be implemented on one System
- Two independent **serial interfaces** (each in RS232 and RS422 format)
- Output of a freely programmable **digital IRIG-B** pulse
- **High freewheel accuracy** due to GPS-supported control of the internal quartz base
- **DCF77 antenna simulation** (77.5kHz) for the synchronization of an additional DCF77 clock system
- **Potential isolation** of the GPS antenna circuit
- Completely **maintenance-free** System
- **SyncOFF timer** (reception failure bypassing) for error message-free operation even in difficult reception conditions
- Redundant **multiple synchronization signal verification** for error-free and leap-free signal evaluation
- Maintenance-free buffered **back-up clock** for three days

Additional Functions of System 6844RC

- All settings on Control Board 6844RC can be carried out via a **remote serial interface** using the *hmc* software.
- Output of **4 highly accurate, freely configurable signals / pulses**.
- With an **optional LAN Management Board**, all settings on the Control Board can be performed and the System monitored via LAN.

Extension options

- Customer-specific system adaptations for "tailor-made" project solutions.

1.1 Difference between Systems 6844 and 6844RC

Both Systems are identical in their basic function and are based on the same hardware platform. However, System 6844RC also has more features and options.



In this description, the **notation 6844(RC)** means that the statements refer to both Systems.



Subsequent local on-site activation of RC functionality is not possible.

System 6844RC is designed for use in conjunction with management systems.

The System can be configured via serial interface and monitored in a network environment by using a LAN Management Board / Module 6844MNG (SNMP/SYSLOG/e-mail notification) and configured via the *hopf* Management Console (*hmc*).

In the 6844RC version, four additional high-precision, programmable internal pulses are available, which can be configured exclusively via the *hopf* Management Console (*hmc*).

The serial connection is made via interface COM0. Optionally, a separate remote interface can also be integrated into the System so that both interfaces COM0 and COM1 are exclusively available for customer applications.

1.2 Structure of Housing Options

The following section describes the differences between the housing options.

1.2.1 Differences between the Housing Options

The following table provides a summary of the different functions and extensions of the various housing options.

Description	42HP	3U 84HP	1U 84HP	TableTop 42HP	Wall 42HP
2 independent serial interfaces each with RS232 and RS422 level	✓	✓	✓ ⁽¹⁾	✓	✓
Slots for Function Boards (for Boards with / without System-Bus)	2	2	2	2	1 ⁽⁴⁾
Optional slot extensions for Function Boards without System-Bus	2	11 ⁽²⁾	✗	✗	✗
Redundant power supply units (with / without additional power feed)	✗	optional	✗	✗	✗
System status via LEDs / relays	optional	optional	✓	optional	optional
LAN Management Board / Module suitable for integration (6844RC only)	✓	✓	✓	✓	✓
Optional slot prepared for LAN Management Board / separate remote interface (6844RC only)	✓ ⁽³⁾	✓ ⁽³⁾	✗	✓ ⁽³⁾	✓ ⁽³⁾
Standard voltage	115 / 230V AC	115 / 230V AC	100 - 240V AC	115 / 230V AC	115 / 230V AC
Temperature controlled forced ventilation	✗	✗	✓	✗	✗
Local on-site exchange of Control Boards possible with display and keypad	✓	✓	✗	✓	✓
Local on-site exchange of power supply unit possible	✓	✓	✗	✓	✓
Local on-site exchange / installation of Function Boards possible	✓	✓	✓	✓	✓
Optional DC power supplies (including voltage terminal converted to DC)	24V DC	✓	✓	✓	✓
	48V DC	✓	✓	✓	✓
	110V DC	✓	✓	✓	✓
	220V DC	✓	✓	✓	✓

(1) Alternative pin terminal design and pin assignment

(2) Standard power supply unit max. 40VA

(3) One optional expansion slot or the serial interface is lost

(4) Second slots available by removing the serial interface



It is **not** possible to freely combine all options and extensions.

For technical clarification of specific combinations of equipment features and functions, please consult the expert team at *hopf* Elektronik GmbH – we will be pleased to advise you.


1.2.2 System Design 6844(RC) in 19 inch Rack 3U/42HP and 3U/84HP

As standard, the System is assembled in a standard ½ 19" rack (3U/42HP). Optionally, the System is also available in a 1/1 19" rack (3U/84HP).


The base system consists of the following:

- 1/1 resp. ½ 19" module rack 3U/84HP
- Supply voltage 115/230V AC – other voltages available
- Voltage input with IEC/EN 60320-1/C14 connection and EMI line filter
- Connection for protection earth (PE) cables up to 16mm²
- System front panel with LCD-Display (2x16), keypad (25 keys)
- Control Board 6844(RC) for:
 - Synchronization signal reception and evaluation
 - Keypad control
 - Display control
 - System-Bus control
 - Time distribution in the system
- Two independent serial interfaces
- DCF77 antenna simulation (77.5kHz) via BNC connector
- System-Bus with two expansion slots


System front side 3U/42HP:

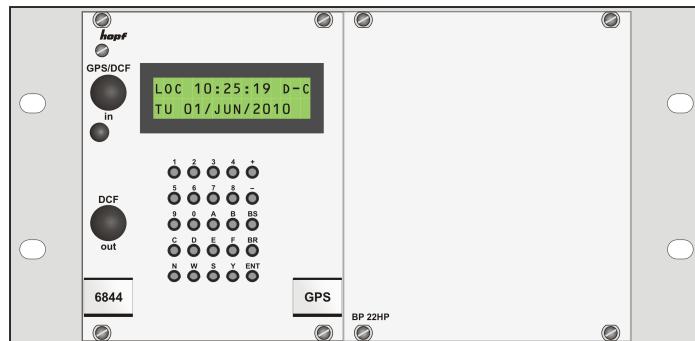


System rear side / plug-in side 3U/42HP:

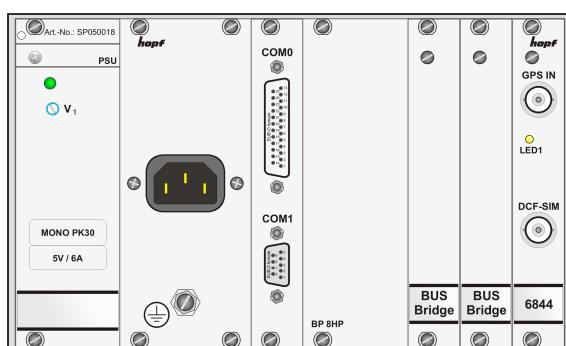

System front side 3U/84HP:

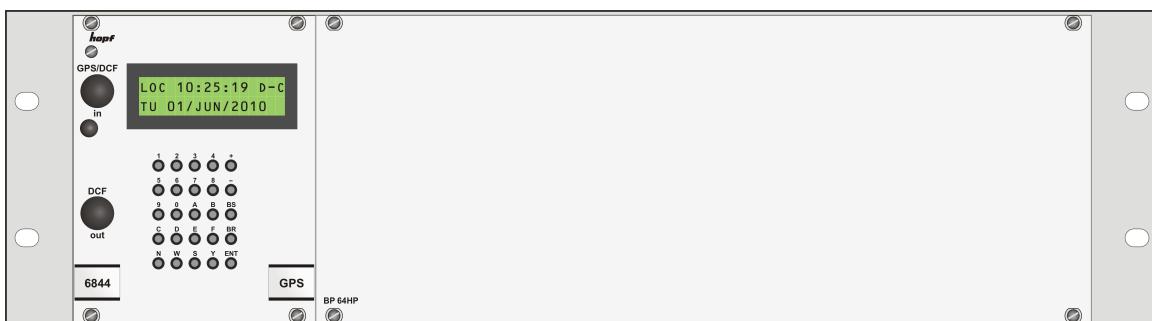


System rear side / plug-in side 3U/84HP:

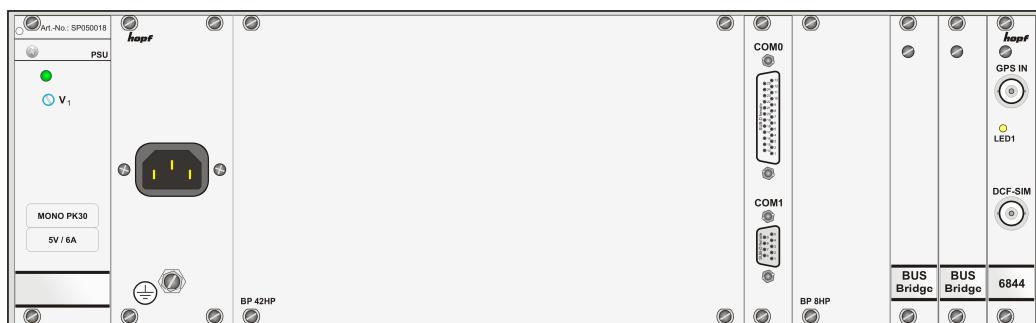


1.2.2.1 19 Inch Rack 3U/42HP and 3U/84HP

As standard, the System is assembled in a standard $\frac{1}{2}$ 19" housing (3U/42HP) for control cabinet installation.

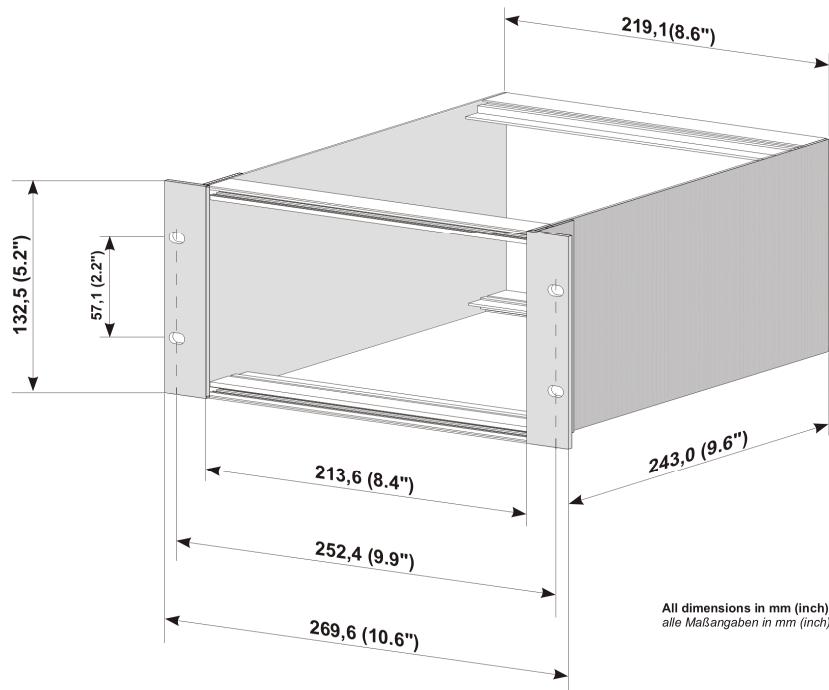

Optionally, the System is also available in a 1/1 19" rack (3U/84HP) for control cabinet installation.

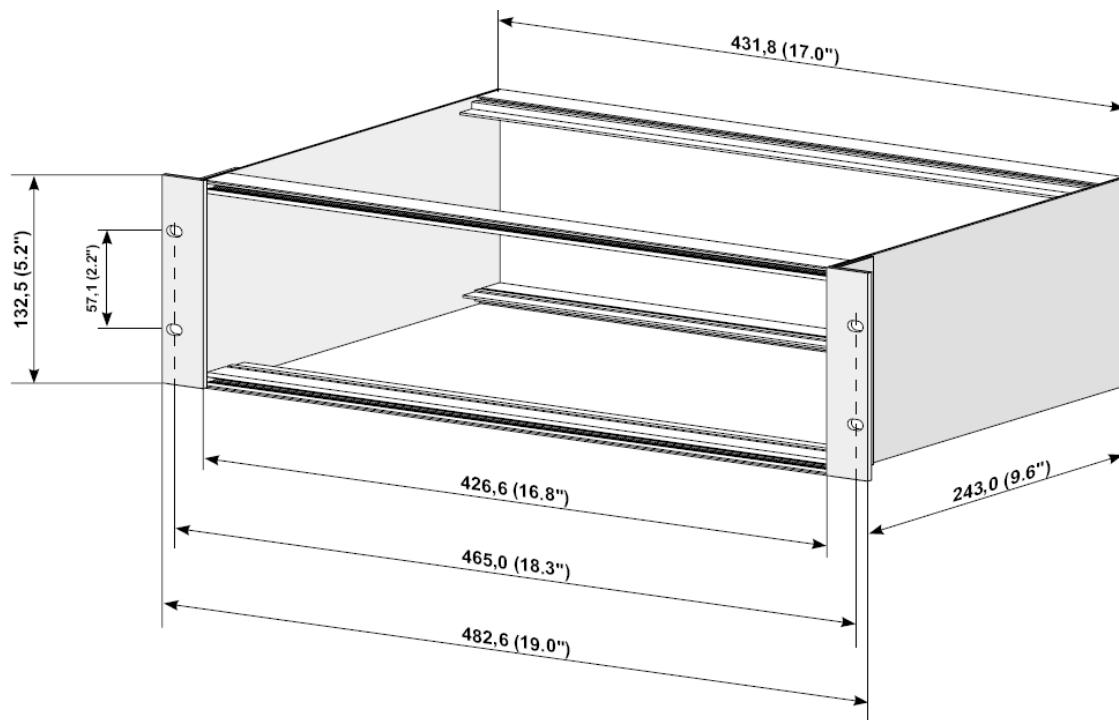

1.2.2.2 Display and Keypad

Display

The display consists of a two-line LCD-Display (Liquid Crystal Display) with 2x16 characters and back-lighting.




The lighting is activated by pressing a key and switches off automatically after approx. 4 minutes with no action required on the keypad.

For a description of the display functions please see **Chapter 4 System Parameterization and Operation**.

Keypad

The alphanumeric keypad with 25 keys provides menu-driven operation of the clock system.

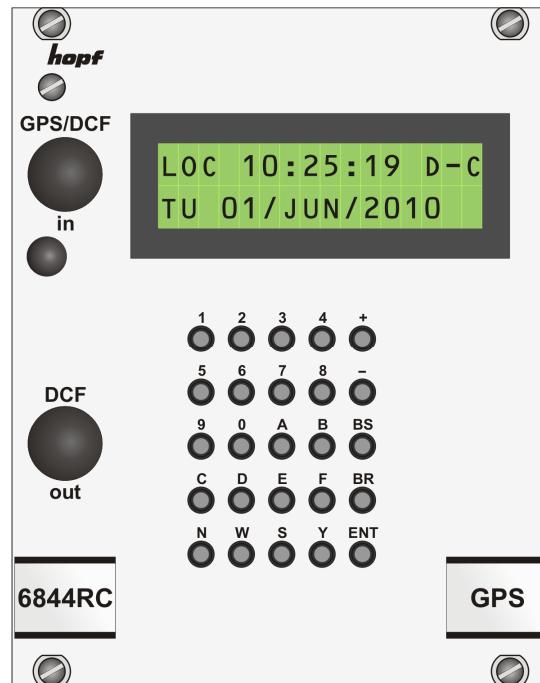

1.2.2.3 System-Bus 6000

System 6844(RC) contains the System-Bus which is made up of Bus Board with VG ledges, by means of which Control Board 6844(RC) and the Function Boards are connected.

The System-Bus is used to:

- Distribute time information.
- Communicate between Control Board 6844(RC) and Function Boards.
- Transmit the regulated second pulse (PPS). This serves to synchronize the data output of the installed Function Boards.
- Distribute the regulated DCF77 pulse (generated by Control Board 6844(RC)).
- Continuous auto-reset circuit for ongoing monitoring of the System-Bus Function Boards in the System.
- Power supply to the installed Boards.

Each active (sending and receiving) Function Board built into the System-Bus has a **SEND** LED. This LED indicates which Function Board is active on the System-Bus at the time.

Function Boards that only receive data from the System-Bus do not have a **SEND** LED.

1.2.2.4 Slots for Function Boards

In System 6844(RC), up to two Function Boards can be installed as standard. In principle, the slot for each 'Function Board' / 'System-Bus Function Board' is freely selectable.



Exceptions with regard to slot selection can be found in **Chapter 7 Function Boards**.


1.2.3 System Design 6844(RC) in 19 inch Rack 1U/42HP (Slim Line)

The system can be individually configured for various applications due to its partly modular design and can be easily upgraded or converted to suit changes in the application conditions.

The base system consists of the following:


- 1/1 19" module rack 1U/84HP (Slim Line)
- Wide-ranging power supply unit from 100-240V AC / 40VA (47-63Hz)
Other input voltages available
- Voltage feed with power switch with connections in accordance with IEC/EN60320/C14 including EMI line filter
- Connection for protection earth (PE) cables up to 16mm²
- System front panel with LCD-Display (2x16), keypad (20 keys) and status LEDs

System front panel:




- Control Board 6844(RC) for:
 - Synchronization signal reception and evaluation
 - Keypad control
 - Display control
 - System-Bus control
 - Time distribution in the system
- Two independent serial interfaces
- DCF77 antenna simulation (77.5kHz) via BNC connector (not available with installed LAN management module)
- System-Bus with two expansion slots

System rear side / plug-in side:



1.2.3.1 19 Inch Rack 1U/84HP

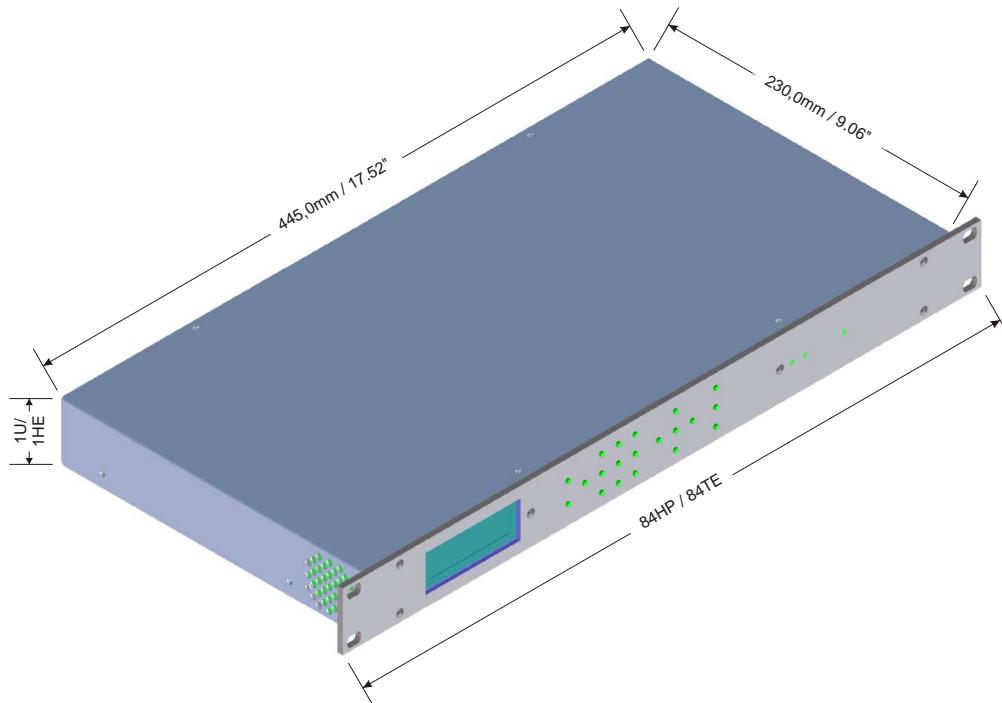

1.2.3.2 Display

The display consists of a two-line LCD-Display (Liquid Crystal Display) with 2x16 characters and back-lighting.




The lighting is activated by pressing a key and switches off automatically after approx. 4 minutes with no action required on the keypad.

For a description of the display functions please see **Chapter 4 System Parameterization and Operation**.

1.2.3.3 Keypad



The alphanumeric keypad with 20 keys provides menu-driven operation of the clock system.

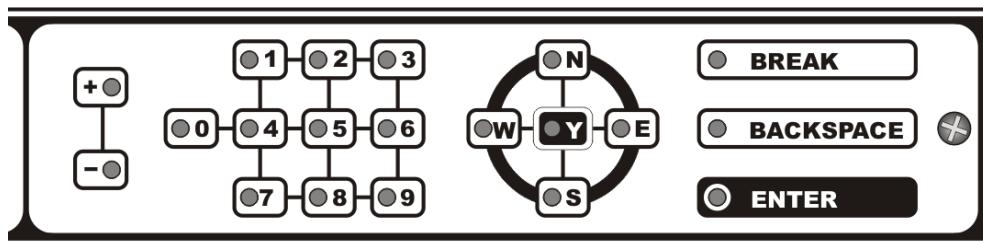

1.2.3.4 Status LEDs

The 1U System has status LEDs on both the front and rear sides. These allow the System status to be recognized in the installed condition in the control panel, whilst operating via the front panel as well as whilst checking the cabling on the rear side of the System.

The LEDs indicate the following System conditions:

		Power	ON	The System is in operation
Front side	Rear side	(green)	OFF	The System is out of operation (for example, it is switched off, defective or the power supply has failed)
		Sync.	ON	The system is <u>not</u> currently synchronized by GPS
ON OFF		(red)	ON	The system is currently synchronized by GPS or the SyncOFF Timer is active
		Sync.	(green)	

1.2.3.5 System-Bus 6000

The System-Bus, consisting of the Bus Board with VG ledges, via which the Control Board 6844(RC) and the Function Boards are connected, can be found in the System 6844(RC).

The System-Bus serves to provide:

- Distribution of the time information.
- Communication between Control Board 6844(RC) and the Function Boards.
- Transmission of the regulated second pulse (PPS). This serves to synchronize the data output of the implemented Function Boards.
- Distribution of the regulated DCF77 pulse (generated by the Control Board 6844(RC)).
- Circular auto-reset circuit for ongoing verification of the System-Bus Function Boards to be found in the System.
- Power supply for the installed boards.

Each active Function Board (transmit and receive) which is linked to the System-Bus has a **SEND** LED. This LED signals which of the Function Boards is active on the System-Bus.

Function Boards which only receive data from the System-Bus do not have a **SEND** LED.

1.2.3.6 Function Board Slots

Up to two Function Boards can be implemented in the System 6844(RC) 1U Slim Line.

As a basic principle, the slot can be freely selected for each 'Function Board' / 'System-Bus Function Board'.



Exceptions of the slot selection can be found in **Chapter 7 Function Boards**

Only boards that have been adapted for the 1U Slim Line System can be used in these slots.

Slots that have been prepared for special functions are identified with the letters "A" and "B".

1.2.3.7 Temperature-controlled Forced Ventilation

The clock system has two temperature-controlled fans to prevent the operating temperature rising above the allowed limit as a result of thermal coupling with equipment mounted in the control panel.

These fans are mounted on the side ventilation apertures and switch in when the temperature in the equipment reaches approx. 45°C.




The ventilation apertures on the left and right hand sides must not be covered. Otherwise, active ventilation is ineffective and inadequate convection and/or thermal coupling with surrounding equipment may cause the temperature to rise above the equipment's maximum permissible operating temperature.


1.2.4 System Design 6844(RC) in 1/2 19 inch Table Top Housing 3U/42HP

In essence, the System consists of the same components as the 3U System, except that the arrangement is in accordance with the differing requirements of the housing option.


System front side / plug-in side:

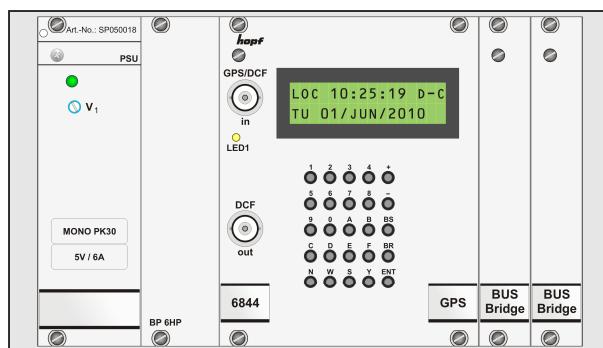

System rear side:

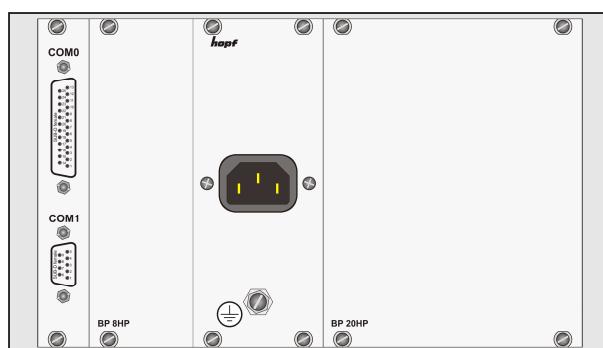


1.2.4.1 1/2 19 Inch Table Top Housing 3U/42HP

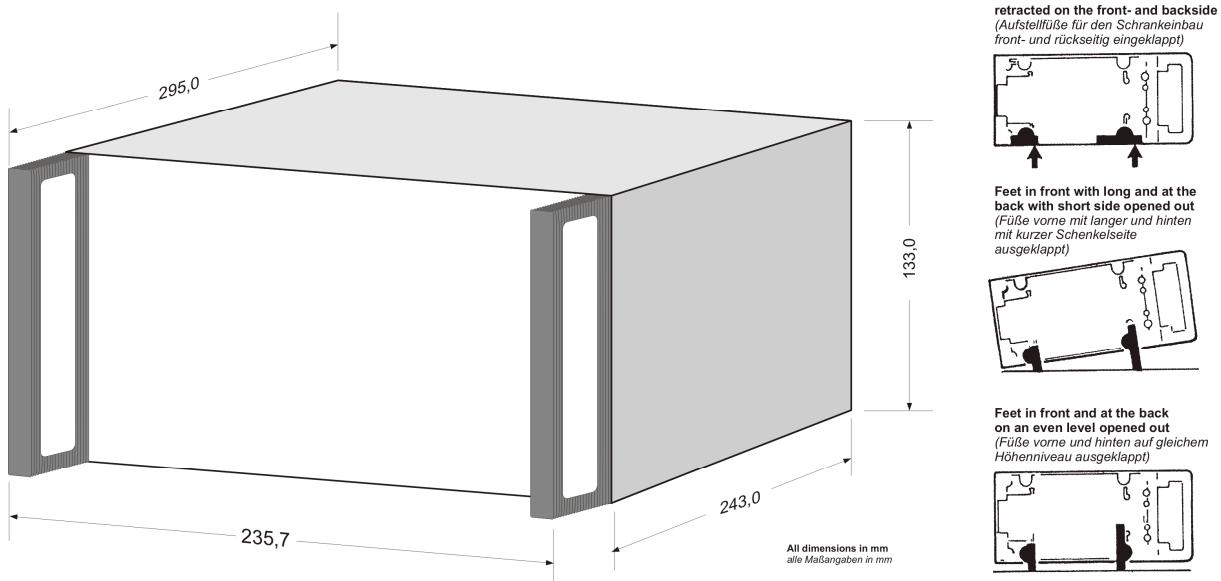


1.2.5 System Design 6844(RC) in ½ 19 inch Wall Housing 3U/42HP

In essence, the System consists of the same components as the 3U System, except that the arrangement is in accordance with the differing requirements of the housing option.

System front side:

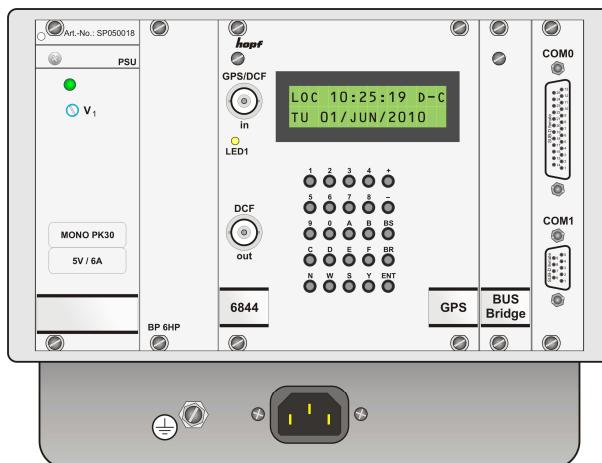

1.2.5.1 ½ 19 Inch Wall Housing 3HE/42TE

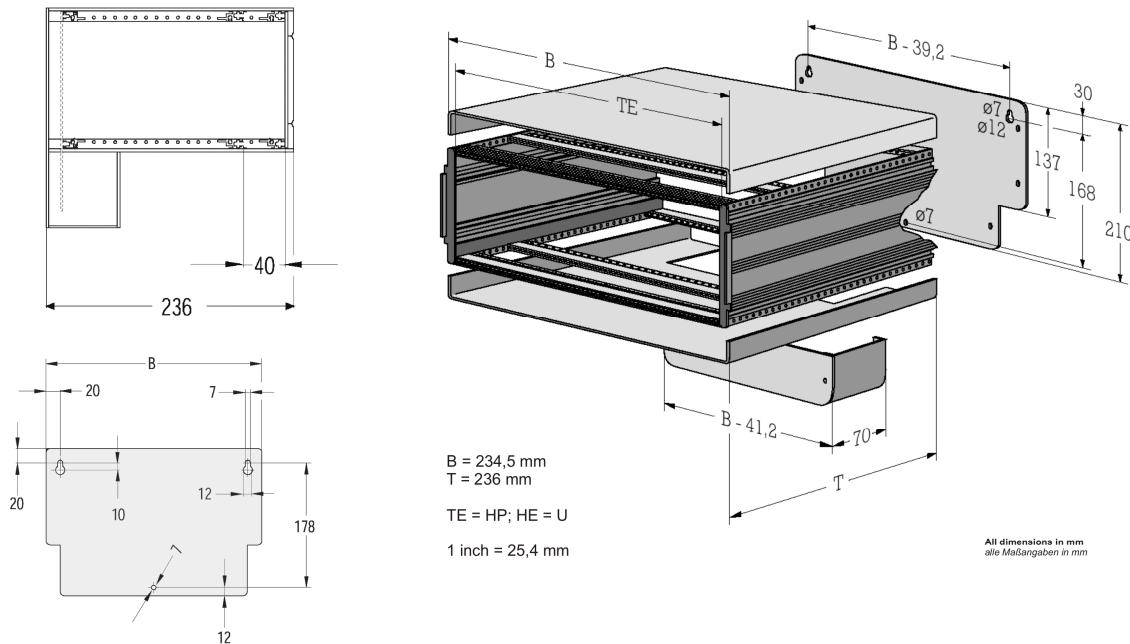

1.2.5.2 Slot for a Function Board

In System 6844(RC), due to the mechanics of the housing, only one Function Board can be installed in the wall-mounting housing as standard.

1.3 Quick Install

- Earthing System / connect power supply
- Connect GPS antenna system
- Switch on power supply
- Input local time and date
- Input difference time
- Input position
- Input changeover point of time **S ⇌ D**
- Input changeover point of time **D ⇌ S**
- Wait for minute change
- Trigger software reset
- Check for correct acquisition of the difference time using the **SHOW** function
- Check for correct acquisition of the position using the **SHOW** function
- Check for correct acquisition of the changeover point of time **S ⇌ D** using the **SHOW** function
- Check for correct acquisition of the changeover point of time **D ⇌ S** using the **SHOW** function
- Trigger hardware reset

The equipment should be synchronous within less than 30 minutes.

This can be checked by means of the:

- LCD-Display
- System Status LEDs (1U version only)

2 Installation

The following describes the installation of the System hardware.

2.1 System 6844(RC) in 3U / Table-Top / Wall - Housing

2.1.1 Installation of the 19 Inch 3U Rack

The System is assembled in a standard 3U/42HP or 3U/84HP 19" housing for control cabinet installation (for dimensions see **Chapter 1.2.2 System Design 6844(RC) in 19 inch Rack 3U/42HP and 3U/84HP**)

The following steps are to be carried out:

- Place the rack in the control panel and fix to the mounting brackets on the front side of the rack using 4 screws.




The ventilation apertures on the top and bottom sides must not be covered. Otherwise passive ventilation (convection) will not be effective and lack of convection and / or thermal coupling with surrounding equipment may give rise to an excessive equipment operating temperature.



At higher temperatures an active cooling / ventilation is recommended.


- Ensure that there is sufficient space between the connection side of the rack and the control panel to allow for the connection of cables to the System.

2.1.2 Mounting the Wall Housing

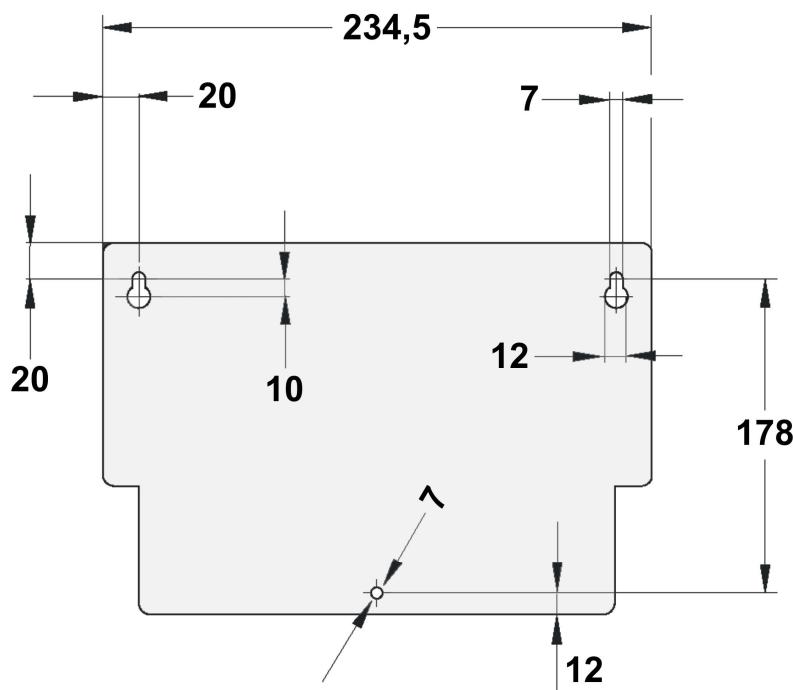


2.1.3 Installing the Table-Top Housing


Fixing toes for rack installation retracted on the front- and backside
(Aufstellfüße für den Schrankenbau front- und rückseitig eingeklappt)



Toes in front with long and at the back with short side opened out
(Füße vorne mit langer und hinten mit kurzer Schenkelseite ausgeklappt)



Toes in front and at the back on an even level opened out
(Füße vorne und hinten auf gleichem Höheniveau ausgeklappt)



2.1.4 Earthing

The System 6844(RC) is usually earthed via the PE cable of the power supply.

An additional earth cable (up to 16mm²) for surge protection purposes can be connected by means of the earth screw located on the System housing.

2.1.5 AC Power Supply

Attention should be paid to the following when connecting the power supply:

- Correct voltage type (AC or DC)
- Voltage level

The power feed is via an input connector with EMI filter compliant with IEC/EN 60320-1/C14



- Plug the input connector into the System's mains power inlet.
- Connect the input connector to the mains power supply and switch the line circuit breaker on.



The System 6844(RC) can be damaged if incorrect voltage is connected.

2.1.5.1 Safety and Warning Instructions

Please read these instructions fully in order to guarantee safe operation of the equipment and to be able to use all the functions.



Caution: Never work on an open unit with live power supply! Danger to life!

The System 6844(RC) is an installation device. Installation and commissioning may only be carried out by suitably qualified specialist personnel. In doing so the respective country-specific specifications must be observed (e.g. VDE, DIN).

Before commissioning ensure that:

- The power supply has been connected correctly and electrical shock protection is in place
- The earth wire is connected
- All supply cables are correctly sized and fused
- All output cables are suitably sized or specially fused for the max. output current of the equipment
- Sufficient convection is guaranteed

The equipment contains life-threatening components and a high level of stored energy.

2.1.5.2 Power Supply Unit Specifications

All AC power supply specifications are described in **Chapter 10.1 Specific Technical Data for 3U / Table-Top / Wall**.

2.1.5.3 Fusing

Pay attention to the correct fusing of the power supply when connecting the System 6844(RC).

The corresponding performance data can be taken from the equipment nameplate. The System 6844(RC) is currently fitted with a power supply unit with a power consumption of max. 40VA.




If the internal fuse (device protection) trips it is highly probable that the equipment is faulty. In this case the device should be checked in the factory.

2.1.6 DC Power Supply (Option)



Ensure that the external power supply is switched off. When connecting the supply cable make sure that the polarity is correct and the equipment is earthed.



- The cable of the power supply is connected using a 2-pole plug connector with additional earth connection and interlocked with the System 6844(RC):

+V_{in}: Positive pole (contact 1)
- V_{in}: Negative pole (contact 2)
PE: Earth



The System 6844(RC) can be damaged if incorrect voltage is connected.



Earthing:
By default the minus pole (-Vin) and earthing (PE) are connected system-sided.

2.1.6.1 Power Supply Unit Specifications

All DC power supply specifications are described in **Chapter 10.1 Specific Technical Data for 3U / Table-Top / Wall**.

2.1.6.2 Fusing

Pay attention to the correct fusing of the power supply when connecting the System 6844(RC).

The corresponding performance data can be taken from the equipment nameplate. The System 6844(RC) is currently fitted with a power supply unit with a power consumption of max. 40VA.



If the internal fuse (device protection) trips it is highly probable that the equipment is faulty. In this case the device should be checked in the factory.

2.1.7 Synchronization Source Connection (GPS)

The GPS antenna equipment coaxial cable is connected to the BNC connector marked "**Antenna**" on the control board 6844(RC) of the System. More detailed specifications for the installation of the antenna equipment, such as cable lengths and types, can be found in the manual "Antenna Equipment GPS".

2.1.8 COM0 / COM1 Serial Interfaces Connection

The serial interfaces are assigned as follows:

SUB-D female Connector 25-pole		
COM0	Pin	Assignment
	1	n.c.
	2	TxD RS232c
	3	RxD RS232c
	4	n.c.
	5	n.c.
	6	n.c.
	7	0V GND
	8	n.c.
	9	n.c.
	10	n.c.
	11	-TxD RS422 (low active)
	12	+TxD RS422 (high active)
	13	n.c.
	14	n.c.
	15	n.c.
	16	n.c.
	17	n.c.
	18	n.c.
	19	n.c.
	20	n.c.
	21	n.c.
	22	-RxD RS422 (low active)
	23	+RxD RS422 (high active)
	24	n.c.
	25	n.c.

SUB-D female Connector 9-pole		
COM1	Pin	Assignment
	1	GND
	2	TxD RS232c
	3	RxD RS232c
	4	+RxD RS422 (high active)
	5	-RxD RS422 (low active)
	6	n.c.
	7	n.c.
	8	-TxD RS422 (low active)
	9	+TxD RS422 (high active)

n.c.: not connected

2.1.9 DCF77 Antenna Simulation (77.5kHz) Connection

The antenna cable of the DCF77 System to be synchronized is connected to the System's BNC socket marked "**DCF-Sim**". A type RG59 coaxial cable is recommended as standard for the connection between *hopf* Systems.

2.1.10 Function Boards Connection

The necessary steps to connect the Function Boards should be consulted in the respective technical specifications of the Function Boards present in the system.

2.2 System 6844(RC) in 1U / Slim Line Housing

2.2.1 Installation of the 19 Inch Rack

The System is assembled in a 1U/84HP 19" housing for control cabinet installation (measurement see **Chapter 1.2.3.1 19 Inch Rack 1U/84HP**).

The following steps are to be carried out:

- Place the rack in the control panel and fix to the mounting brackets on the front side of the rack using 4 screws.



The side ventilation apertures on the right and left hand sides must not be covered. Otherwise active ventilation will not be effective and lack of convection and / or thermal coupling with surrounding equipment may give rise to an excessive equipment operating temperature.

- Ensure that there is sufficient space between the connection side of the rack and the control panel to allow for the connection of cables to the System.

2.2.2 Earthing

The System 6844(RC) 1U Slim Line is usually earthed via the PE cable of the power supply.

An additional earth cable for surge protection purposes can be connected by means of the earth screw located on the rear side of the System housing.


2.2.3 AC Power Supply

The Systems' standard AC power supply unit is described here. However, the connection data on the nameplate of the respective unit is always applicable.

Attention should be paid to the following when connecting the power supply:

- Correct voltage type (AC or DC)
- Voltage level

The power feed is via an input connector with EMI filter compliant with IEC/EN 60320-1/C14



- Check that the mains power switch is in position " 0 " (= off).
- Plug the input connector into the System's mains power inlet.
- Connect the input connector to the mains power supply and switch the line circuit breaker on.



The System 6844(RC) can be damaged if incorrect voltage is connected.

2.2.3.1 Safety and Warning Instructions

Please read these instructions fully in order to guarantee safe operation of the equipment and to be able to use all the functions.



Caution: Never work on an open unit with live power supply! Danger to life!

The System 6844(RC) is an installation device. Installation and commissioning may only be carried out by suitably qualified specialist personnel. In doing so the respective country-specific specifications must be observed (e.g. VDE, DIN).

Before commissioning ensure that:

- The power supply has been connected correctly and electrical shock protection is in place
- The earth wire is connected
- All supply cables are correctly sized and fused
- All output cables are suitably sized or specially fused for the max. output current of the equipment
- Sufficient convection is guaranteed

The equipment contains life-threatening components and a high level of stored energy.

2.2.3.2 Power Supply Unit Specifications

All AC power supply specifications are described in **Chapter 10.2 Specific Technical Data for 1U**.

2.2.3.3 Fusing

Pay attention to the correct fusing of the power supply when connecting the System 6844(RC) 1U Slim Line

The corresponding performance data can be taken from the equipment nameplate. The System 6844(RC) 1U Slim Line is currently fitted with a power supply unit with a power consumption of max. 40VA.




If the internal fuse (device protection) trips it is highly probable that the equipment is faulty. In this case the device should be checked in the factory.

2.2.4 DC Power Supply (Option)



Ensure that the external power supply is switched off. When connecting the supply cable make sure that the polarity is correct and the equipment is earthed.



- The cable of the power supply is connected using a 2-pole plug connector with additional earth connection and interlocked with the System 6844(RC) 1U Slim Line:

+V_{in}: Positive pole (contact 1)
 -V_{in}: Negative pole (contact 2)
 PE: Earth



The System 6844(RC) 1U Slim Line can be damaged if incorrect voltage is connected.



Earthing:
 By default the minus pole (-Vin) and earthing (PE) are connected system-sided.

2.2.4.1 Power Supply Unit Specifications

All DC power supply specifications are described in **Chapter 10.2 Specific Technical Data for 1U**.

2.2.4.2 Fusing

Pay attention to the correct fusing of the power supply when connecting the System 6844(RC) 1U Slim Line.

The corresponding performance data can be taken from the equipment nameplate. The System 6844(RC) 1U Slim Line is currently fitted with a power supply unit with a power consumption of max. 40VA.



If the internal fuse (device protection) trips it is highly probable that the equipment is faulty. In this case the device should be checked in the factory.

2.2.4.3 Reverse Voltage Protection

The version of System 6844(RC) 1U Slim Line with DC supply has reverse voltage protection. This protection prevents damage to the equipment due to an incorrectly connected DC power supply.


Protection is effected by means of a self-resetting fuse. In the case of reverse polarity, it is necessary to switch the equipment off for approx. 20 seconds after this fuse has tripped. The power supply can then be connected with the correct polarity.


2.2.5 Synchronization Source Connection (GPS)

The GPS antenna equipment coaxial cable is connected to the BNC socket marked "**Antenna**" on the rear side of the System. More detailed specifications for the installation of the antenna equipment, such as cable lengths and types, can be found in the manual "Antenna Equipment GPS".

2.2.6 COM0 / COM1 Serial Interfaces Connection


The serial interfaces are assigned as follows:

SUB-D male connector 9-pole  COM0	Pin	Assignment
	1	n.c.
	2	RxD RS232
	3	TxD RS232
	4	n.c.
	5	GND
	6	+TxD RS422 (high active)
	7	-TxD RS422 (low active)
	8	+RxD RS422 (high active)
	9	-RxD RS422 (low active)

SUB-D male connector 9-pole  COM1	Pin	Assignment
	1	n.c.
	2	RxD RS232
	3	TxD RS232
	4	n.c.
	5	GND
	6	+TxD RS422 (high active)
	7	-TxD RS422 (low active)
	8	+RxD RS422 (high active)
	9	-RxD RS422 (low active)

n.c.: not connected

2.2.7 Error Relays Connection

SUB-D male connector 9-pole  Error Relays	Pin	Assignment
	1	n.c.
	2	PWR - REL2 Common contact (c)
	3	PWR - REL2 Normally open contact (no)
	4	n.c.
	5	GND
	6	PWR - REL2 Normally closed contact(nc)
	7	SYNC - REL1 Normally closed contact (nc)
	8	SYNC - REL1 Common contact (c)
	9	SYNC - REL1 Normally open contact (no)

PWR = Power / Operation – SYNC = Synchron

2.2.8 DCF77 Antenna Simulation (77.5kHz) Connection

The antenna cable of the DCF77 System to be synchronized is connected to the System's BNC socket marked "**DCF-Sim**". A type RG59 coaxial cable is recommended as standard for the connection between *hopf* Systems.



DCF77 antenna simulation (77.5kHz) is not available in system 6844RC with installed LAN management module

2.2.9 Function Boards Connection

The necessary steps to connect the Function Boards should be consulted in the respective technical specifications of the Function Boards present in the system.

3 Commissioning

This chapter describes the commissioning of the system 6844(RC).

3.1 General Procedure

The commissioning procedure is as follows:

- Check the cabling:
 - Earth
 - Power supply
 - GPS antenna equipment
 - COM0 / COM1 serial interfaces
 - DCF77 antenna simulation (77.5kHz)
 - Error relays (1U only)
 - Function Boards
- Isolate all plug connections to the output interfaces and Function Boards (recommended)
- GPS antenna equipment connection to remain in place
- Switch on System 6844(RC)
- Power LEDs light up on front and rear sides (1U only)
- The start frame appears on the display (for approx. 3 seconds)
- Execute all parameter settings via the **SET menu** and also via the **INI** and **S.CLOCK menus** when necessary
- Check for successful synchronization of the System 6844(RC)
- Commission the Function Boards (where present):
 - Set the Function Board(s) parameters
 - Re-establish the plug connections
 - Check that the connected equipment is receiving the time correctly


3.2 Switching on the Operating Power Supply

AC power supply 3U / Table-Top / Wall:



Switch on external power supply.
The System 6844(RC) runs and the firmware version and programming date are shown on the display (see *Chapter 3.3 Display after System Start/Reset (Firmware)*).

AC power supply 1U:



Put the mains power switch into position " I " (on).
The System 6844(RC) 1U Slim Line runs and the firmware version and programming date are shown on the display (see *Chapter 3.3 Display after System Start/Reset (Firmware)*).

DC power supply:



Switch on external power supply source.
The System 6844(RC) 1U Slim Line runs and the firmware version and programming date are shown on the display (see *Chapter 3.3 Display after System Start/Reset (Firmware)*).

The green Power Status LED and the red Sync LED light up for both types of power supply.

3.3 Display after System Start/Reset (Firmware)

The following start frame appears on the 2x16 digit LCD-Display for approx. 3 seconds after switch-on or reset:

SYSTEM	6844
V01. 00	31/MAY/10

⇒ Control Board 6844 firmware

⇒ Firmware programming date

respectively

SYSTEM	6844RC
V01. 00	31/MAY/10

⇒ Control Board 6844RC firmware

⇒ Firmware programming date

3.3.1 Standard Display without Valid Time

The following frame (with incremental seconds) appears on the display on **first commissioning** or a longer time **without voltage condition** and loss of backup clock information:

LOC	00:00:05	- - -
- -	00/- - -	2000 E



After a voltage failure of less than 3 days the display starts up with the internal back-up clock information, provided that time information was previously available.

3.3.2 Standard Display with Valid Time

Sample frame for the standard display after system start with valid back-up clock information or following manual input of the time information:

LOC	10:25:19	D-C
TU	01/JUN/2010	

The meaning of the individual items is as follows:

LOC : 10:25:19	On adjustment: show local time on the display.
UTC : 08:25:19	On adjustment: show UTC time on the display.
MO - TU - WE - TH - FR - SA - SU	Display of the weekday in abbreviated form: corresponds to MONDAY – SUNDAY
01/JUN/2010	Display of the date: Day / Month abbreviation / Year

Status display:

Position 1: x--	"D"	For daylight saving time (summer time)
	"S"	For standard time (winter time)
	"_"	The time indication on the display is set to UTC or the clock system has no valid time information
Position 2: -x-	"A"	Announcement of DST changeover (summer time / winter time changeover) to another time zone. This announcement takes place approx. 1 hour before the time zone change Announcement of a leap second . This information takes place approx. 1 hour before the insertion of the leap second.
	"_"	no announcement
Position 3: --x	Display of the internal status of the clock system:	
	"_"	The clock system has no valid time information
	"C"	Clock system is running with internal quartz basis (C=Crystal)
	"r"	Clock system is synchronized with GPS without internal quartz base control
	"R"	Clock system is synchronized with GPS with internal quartz base control (R=Radio)



The internal time status information is calculated and the System is updated after each minute change.

3.3.3 Standard Display with Valid Time and Active ERROR-Byte

To provide the user with a visual indication of an error in the System, an E is shown on the bottom right of the display as soon as one bit in the ERROR-byte is active (see **SHOW menu**).

LOC	10:25:19	D-C
TU	01/JUN/2010	E



When the **E** is shown on the display for an active ERROR (see **SHOW menu**), the LCD-Display backlight **FLASHES** in the 1Hz pulse.


This flashing occurs on the standard display only and not on the menu images.

3.4 Keypad Functions


The following describes the keypad design and operation.

3.4.1 Keypad Layout

Keypad layout of 3U / Table-Top / Wall Systems:

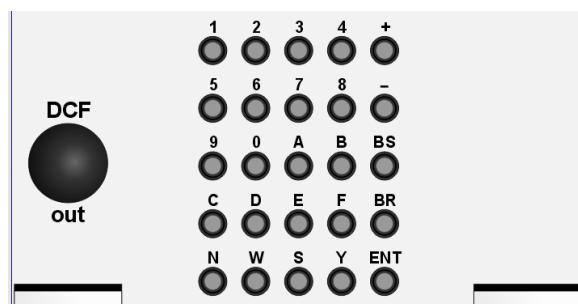

Keypad layout of 1U System:

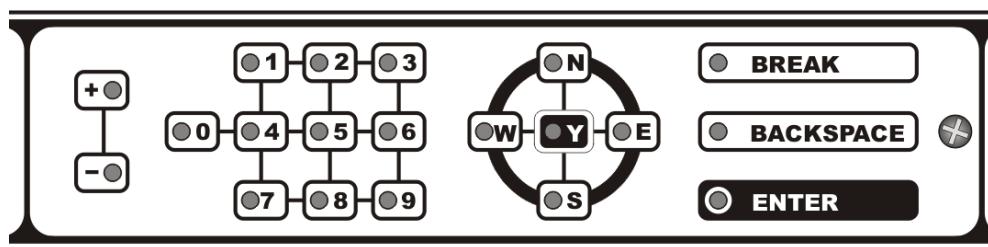

3.4.2 Key Assignment

Key	Function
+ / -	Input of the operational signs for numerical values
0 ... 9	Input of the digits
N, E, S, W	Input keys
Y	Call up menu group selection frame
BR (BREAK)	Aborts all key controls. Quits the input menu at any time and in any position. All inputs following the most recent activation of the ENT key are discarded.
BS (BACK- SPACE)	Deletes the last character entered
ENT (ENTER)	Calls up the main menu from the standard display. Completes and accepts the input at the end of an input frame. When no input is made, pressing ENT switches through to the next frame.

The other buttons have no specific function.

3.4.3 Keypad Inputs / Main Menu Activation

The main menu is activated by pressing the **ENT** key. The display changes from the standard frame to the main menu:

Standard frame:

LOC	10:25:19	D-C
TU	01/JUN/2010	

Main menu:

	SET=1	SHOW=2
S. CLK=3		I NI =4

- The required menu item is executed by entering the corresponding number.
- An incorrect input number is either directly refused or checked for plausibility after the **ENT** key is pressed. An "INPUT ERROR" message follows. The display then returns to the standard frame.
- All of the selection functions are not always required or used. The System functions for which they are effective are indicated in the specification, at the beginning of each sub-function. If such a function is called up by mistake this can be exited by pressing the **BR** key.

3.5 Initialization

The base initialization of the equipment is carried out first. This enables the equipment to synchronize with GPS.

To initialize the System 6844(RC) GPS the menu items presented below are to be parameterized accordingly (see **Chapter 4.2 SET Menu - Basic Settings System 6844(RC)**). In doing so attention should be paid to System and location specific requirements such as time base, synchronization source and synchronization parameters.

Menu items required for the base parameterization:

MENU 1: #SET

- 1.01 TIME/DATE
- 1.02 DIF.-TIME
- 1.03 CHANGE_OVER DATE (Changeover Standard time / Summer time)
- 1.04 CHANGE_OVER DATE (Changeover Summer time / Standard time)
- 1.05 POSITION

All additional settings are to be carried out in accordance with the requirements and use of the equipment.

4 System Parameterization and Operation

The following describes the menu structure and the individual menus.

4.1 Menu Structure

The main menu is called up by pressing the **ENT** key. This is divided into four different menu items. These are called up by entering the respective number (1-4). Following this entry the respective sub-menus are then called up.

The menu structure is constructed as follows:

MENU 1: #SET

1.01	TIME/DATE	
1.02	DIFF.-TIME	
1.03	CHANGE_OVER DATE	(Changeover standard time ⇒ summer time)
1.04	CHANGE_OVER DATE	(Changeover standard time ⇒ summer time)
1.05	POSITION	
1.06	SYNCOFF	
1.06	COM0 - SERIALPARAMETER	
1.07	COM0 - MODE 1	
1.08	COM0 - MODE 2	
1.09	COM0 - MODE 3	(only if necessary for parameterizing)
1.10	COM1 - SERIALPARAMETER	
1.11	COM1 - MODE 1	
1.12	COM1 - MODE 2	
1.13	COM1 - MODE 3	(only if necessary for parameterizing)
1.14	LAN1 - IP-ADR	(board 7271/7272 not in system ⇒ no function)
1.15	LAN1 - GATEWAY	(----- " -----)
1.16	LAN1 - NETMASK	(----- " -----)
1.17	LAN1 - CONTROL-BYTE	(----- " -----)
1.18	LAN2 - IP-ADR	(2. board 7271/7272 not in system ⇒ no function)
1.19	LAN2 - GATEWAY	(----- " -----)
1.20	LAN2 - NETMASK	(----- " -----)
1.21	LAN2 - CONTROL-BYTE	(----- " -----)
1.22	LAN MNG - IP-ADR	(only by 6844RC with LAN MNG activated)
1.23	LAN MNG - GATEWAY	(----- " -----)
1.24	LAN MNG - NETMASK	(----- " -----)
1.25	LAN MNG - CONTROL-BYTE	(----- " -----)
1.26	FREQUENCY	(board 7530 not in system ⇒ no function)
1.27	FREQUENCY TimeON/TimeOFF	(----- " -----)
1.28	PULSE OUTPUT	
1.29	DISPLAY TIME	
1.30	LANGUAGE DAY/MONTH	
1.31	SYSTEM-BYTE	
1.32	KEYPAD KEYWORD	

MENU 2: #SHOW

2.01	SATELLITES	
2.02	ERROR-BYTE	
2.03	POSITION	
2.04	DIFF.-TIME	
2.05	CHANGE_OVER DATE	(Changeover standard time ⇒ daylight saving time)
2.06	CHANGE_OVER DATE	(Changeover daylight saving time ⇒ standard time)
2.07	SYNCOFF	
2.08	COM0 - SERIALPARAMETER	
2.09	COM0 - MODE 1	
2.10	COM0 - MODE 2	
2.11	COM0 - MODE 3	(only if necessary for parameterizing)
2.12	COM1 - SERIALPARAMETER	
2.13	COM1 - MODE 1	
2.14	COM1 - MODE 2	
2.15	COM1 - MODE 3	(only if necessary for parameterizing)
2.16	LAN1 - IP-ADR	(board 7271/7272 not in system ⇒ no function)
2.17	LAN1 - GATEWAY	(----- " -----)
2.18	LAN1 - NETMASK	(----- " -----)
2.19	LAN1 - CONTROL-BYTE	(----- " -----)
2.20	LAN2 - IP-ADR	(2. board 7271/7272 not in system ⇒ no function)
2.21	LAN2 - GATEWAY	(----- " -----)
2.22	LAN2 - NETMASK	(----- " -----)
2.23	LAN2 - CONTROL-BYTE	(----- " -----)
2.24	LAN MNG - IP-ADR	(only by 6844RC with LAN MNG activated)
2.25	LAN MNG - GATEWAY	(----- " -----)
2.26	LAN MNG - NETMASK	(----- " -----)
2.27	LAN MNG - CONTROL-BYTE	(----- " -----)
2.28	FREQUENCY	(board 7530 not in system ⇒ no function)
2.29	FREQUENCY TimeON/TimeOFF	(----- " -----)
2.30	PULSE OUTPUT	
2.31	SYSTEM-BYTE	
2.32	ADD. OUTPUTS (1-4, if unlocked 1-8)	
2.33	ADD. INPUTS (1-4, if unlocked 1-8)	

MENU 3: #S.CLOCK

- 3 . 01 SLAVE CLOCK NO. 1-4; see Board 7406 manual
(if no Board 7406 in the System ⇒ no function)

MENU 4: #INI

4.01	SHOW FIRMWARE-VERSION	
4.02	SHOW PCID (PRODUCT CONFIG ID)	
4.03	GPS MODE POS.-FIX/3D	
4.04	DCF77.SYS CONF.-BYTE	
4.05	DCF77.ADD CONF.-BYTE	(only if activated)
4.06	DCF77.SYS/(ADD) TIMEOFF	(ADD only if activated)
4.07	IRIG-B.(1) CONF.-BYTE	
4.08	IRIG-B.(1) TIMEOFF	
4.09	IRIG-B.(2) CONF.-BYTE	(only if activated)
4.10	IRIG-B.(2) TIMEOFF	(only if activated)
4.11	IRIG OUTPUT TIMER	
4.12	LAN MANAGEMENT BOARD ACTIVATION (board 6844RC only)	
4.13	RESET/DEFAULT	

4.2 SET Menu - Basic Settings System 6844(RC)

The function of this menu is to enter basic settings such as time/date, time offset, position, etc.



Grey lettering on the display corresponds to a possible customer input.

Selection screens are confirmed with **Y** (yes) or rejected with **N** (no) or any key other than **Y** and **BR**.

After entering **N** the next sub-function is displayed.

4.2.1 Fail-safe Storage of Data Entries

All data entered via the keyboard is checked for plausibility and then stored fail-safe in an EEPROM.



Exception:

The parameters of all NTP LAN Boards available in the System and the Master Clock Board(s) (Menu 3 - S.CLK) are not stored on Control Board 6844(RC) but on the respective Function Board in each case.

4.2.2 Input Time / Date

The local time is set with this input function. The entry is made on two lines and must be complete. For this purpose it is also necessary to input the leading zeros.

Selection frame:

SET	LOCAL
TIME/DATE	Y/N

Input frame:

TIME > 15 : 43 : 00
DATE > 23 / 05 / 2010

The meaning of the individual items is as follows:

Code	Meaning	Value Range
HH	Hour	00 ... 23
MM	Minute	00 ... 59
SS	Second	00 ... 59
DD	Day	01 ... 31
MM	Month	01 ... 12
YYYY	Year	2000 ... 2099



The weekday is automatically computed to the date

The entry is accepted by pressing the **ENT** key.

In case of an incorrect input the "**INPUT ERROR**" message appears for 3 seconds. The setting function is then exited and the standard frame reappears on the display.

If further entries are required, any key except **[Y]** and **[BR]** can be pressed to switch through the **SET** menu.

The setup program is exited by pressing the **[BR]** key. The standard frame reappears.



The changeover dates for daylight saving time are to be entered for countries which change their time zone during the year.

4.2.3 Input Local Time to UTC Time Offset (Time Zone)

The time offset between the local standard time and the world time (UTC time) is entered with this function.

Selection frame:

Input frame: Difference Time Europe (CET)

The operational sign indicates the direction in which the local time differs from the world time:

- '+' Corresponds to East of the Null Meridian (Greenwich)
- '-' Corresponds to West of the Null Meridian (Greenwich)

Since most countries of the world count their time offset in whole hours, the input is also in one hour steps:

e.g. + 05:00 or - 11:00

However, some countries also use smaller time intervals. Therefore it is also possible to input the data in one minute steps:

e.g. + 05:30 or - 08:45



The time offset always relates to the **local standard time (winter time)**, even if commissioning or input of the time offset takes place during daylight saving time.

Standard time (winter time)	⇒	adjusted diff.-time
Daylight saving time (DST)	⇒	adjusted diff.-time +1h

Example for Germany:

UTC	Local Time	Time offset to be set:	Comment
13:00:00	14:00:00 (winter time)	+01:00	
13:00:00	15:00:00 (Daylight Saving Time (DST))	+01:00	The time offset of two hours is made up of +01:00h time offset and +01:00h for the daylight saving time offset (changeover points of time must be set for this purpose).

4.2.4 Input Daylight Saving Time (DST) Changeover

This input is used to define the points of time at which the changeover is made to daylight saving time (DST) or to standard time throughout the course of the year. The hour, weekday, week of the month and month in which the daylight saving time (DST) changeover (daylight saving time / standard time changeover) is to take place are given here. The exact points of time are then calculated automatically for the current year.



At the turn of the year, the new dates for the changeover times in the new, now current year are automatically computed.

The parameters are selected in such a way that the changeover can take place at any point of time. For control purposes, the exact date for the current year is indicated in the **SHOW** functions.

If the DST changeover is **not** to be activated all values have to be entered as 0. The System 6844(RC) then only operates with the standard time (winter time) set via the time offset.

Selection frame: **SET CHANGE_OVER** For winter / summer time changeover
DATE S ->D Y/N (Standard time \Leftrightarrow Daylight saving time)

Input frame: **S ->D hh/d/w/MM**
>02/7/5/03<

Selection frame: **SET CHANGE_OVER** For summer / winter time changeover
DATE D ->S Y/N (Daylight saving time \Leftrightarrow Standard time)

Input frame: **D ->S hh/d/w/MM**
>03/7/5/10<

The meaning of the individual items is as follows:

hh	The hour in which the changeover is to take place	00 ... 23 hours
d	The weekday on which the changeover is to take place	1 = Mo ... 7 = Su
w	the appearance of weekday in the month on which the changeover is to take place	1 ... 4 \Rightarrow 1.-4. appearance 5 \Rightarrow last appearance in the month
MM	The month in which the changeover is to take place	

The entry is completed by pressing the **ENT** key.

Input example for Germany (CET/CEST):

Standard time (CET) \Rightarrow DST (CEST) at the 2nd hour on the last Sunday in March.

Input: 02/7/5/03

Changeover standard time \Rightarrow DST (daylight saving time)

Local time	UTC	Offset UTC \Rightarrow local time
01:59:58	00:59:58	+1 hour
01:59:59	00:59:59	+1 hour
03:00:00	01:00:00	+2 hours
03:00:01	01:00:01	+2 hours

DST (CEST) \Rightarrow Standard time (CET) at the 3rd hour on the last Sunday in October.

Input: 03/7/5/10

Changeover DST (daylight saving time) \Rightarrow standard time

Local time	UTC	Offset UTC \Rightarrow local time
02:59:58	00:59:58	+2 hours
02:59:59	00:59:59	+2 hours
02:00:00	01:00:00	+1 hour
02:00:01	01:00:01	+1 hour

4.2.5 Input Position

The geographical position of the equipment is entered with this function. This function is helpful during the first commissioning and shortens the first synchronization of the GPS receiver.

<u>Selection frame:</u>	SET POSITION
	Y / N

<u>Input frame:</u>	L T. N51°12,6900'
	L N. E007°37,7900'

position of the *hopf* company

The entries for the latitude and longitude positions take place in degrees and minutes.

The operational sign for the degrees of latitude - **LT.** is:

N Northern hemisphere

S Southern hemisphere

and for the degrees of longitude - **LN.:**

E East of the Null Meridian (Greenwich)

W West of the Null Meridian (Greenwich)

The latitude position is entered first under **PGG°MM,SSSS**, where the meanings are as follows:

P N or S, North or South

GG Degrees of **Latitude** from

00 - 89

MM Minutes of **Latitude** from

00 - 59

SSSS Minutes of **Latitude** decimal places

0000 - 9999

There then follows the entry of the longitude position under **pGGG°MM,SSSS**, where the meanings are as follows:

p	E or W, East or West
GGG	Degrees of Longitude from
MM	Minutes of Longitude from
SSSS	Minutes of Longitude decimal places

The position of *hopf* Elektronik GmbH is given in the above example.

The entry is completed by pressing the **[ENT]** key.

In order to speed up the synchronization of the GPS receiver it is sufficient for the position to be input to an accuracy of 1-2 degrees (without minutes or decimal places).



If the position is unknown **0** should be entered in all places and **N** and **E** for the direction.



If the position is incorrectly set and the GPS receiver synchronizes with this position in the Position-fix mode, there may be **a time leap under sync. status "R"** if, in the meantime, the GPS receiver picks up enough satellites to calculate its correct position.

4.2.6 Input SyncOFF Timer - Delayed Change of Sync.-Status

This value is used to bridge reception failures for error message-free operation in difficult reception conditions.

In the event of reception failure of the synchronization source (GPS in this case), System synchronization to Quartz Status '**C**' is delayed by the set value. During this time, the System continues to run in synchronization status '**r**' on the internal, high-precision regulated quartz basis.

This timer is of particular importance when certain System outputs are linked to a specific System status.

The timer can be adjusted from 2min. to 99h and 59min.

Selection frame:

SET	SyncOFF
TIMER	Y/N

Input frame:

SyncOFF	>hh:mm<
	>99:59<

Default value : 00:55

The desired value is entered via the keyboard. The input is accepted by pressing the **[ENT]** key.



The associated **SHOW menu** can display whether the SyncOFF timer is active and the current value of the timer.

4.2.7 Serial Interface Parameters

The interface parameters and the output mode can be entered separately for each of the two serial interfaces. The following selection frames will be displayed (for configuration see **Chapter 5 COM0 / COM1 Serial Interfaces**).

4.2.7.1 Selection Frames for Parameters of Serial Interface COM0

Setting serial Parameter

Selection frame:	SET COM0 SERIAL PARAMETER Y/N
------------------	----------------------------------

The parameters for **Baud rate**, **Word length**, **Parity bit** and **Stop bit** must be entered in sequence in the following input frame:

Input frame:	Bd : 09600 W: 8 P: N S: 1 _
--------------	--------------------------------

Setting Mode Byte 1

Selection frame:	SET COM0 MODEBYTE_1 Y/N
------------------	----------------------------

Input frame:	ModB_1 76543210 COM0 >11001100
--------------	-----------------------------------

Setting Mode Byte 2

Selection frame:	SET COM0 MODEBYTE_2 Y/N
------------------	----------------------------

Input frame:	ModB_1 76543210 COM0 >11101100
--------------	-----------------------------------



Depending on the selected string, **Mode Byte 3** is also available in the menu for the required configuration of the string.

Setting Mode Byte 3

Selection frame:	SET COM0 MODEBYTE_3 Y/N
------------------	----------------------------

Input frame:	ModB_3 76543210 COM0 >00000001
--------------	-----------------------------------

4.2.7.2 Selection Frames for COM1 Serial Interface Parameters

SET COM_1 SERIAL PARAMETER Y/N

The parameters for the COM1 interface are entered in the same way as for COM0.

4.2.8 LAN Board Parameters (Option)

Further information and an explanation of the parameters are available in the respective LAN Board description.

4.2.8.1 Selection Frames for LAN Board 1 Parameters

Setting the IP address

<u>Selection frame:</u>	SET LAN_1
	IP-ADR. Y/N

<u>Input frame:</u>	LAN_1 IP-ADR.
	>192. 168. 202. 210

Setting the Gateway address

<u>Selection frame:</u>	SET LAN_1
	GATEWAY-ADR. Y/N

<u>Input frame:</u>	LAN_1 GW-ADR.
	>192. 168. 202. 010

Setting the Network Mask

<u>Selection frame:</u>	SET LAN_1
	NETMASK Y/N

<u>Input frame:</u>	LAN_1 NETMASK
	>255. 255. 255. 000

Setting the Control Byte

<u>Selection frame:</u>	SET LAN_1
	CTRL. -BYTE Y/N

<u>Input frame:</u>	CTRL. -B 76543210
	LAN_1 >00000000

4.2.8.2 Selection Frames for LAN Board 2 Parameters

<u>Selection frame:</u>	SET LAN_2
	IP-ADR. Y/N

This display frame shows the configuration of the LAN Board coded as Board 2 (if available in the System).

The parameters for LAN Board 2 are entered in the same way as for LAN Board 1.

4.2.8.3 Selection Frame Parameters of the LAN Management Board/Module (System 6844RC only)



The menu is only visible on System 6844RC when the LAN Management Board / Module is activated.
The LAN Management Board / Module is activated in the **INI Menu**.

Setting the IP address

Selection frame:

SET	LAN_MNG
IP-ADR.	Y/N

Input frame:

LAN_MNG	IP-ADR.
>192.168.202.210	

Setting the Gateway address

Selection frame:

SET	LAN_MNG
GATEWAY-ADR.	Y/N

Input frame:

LAN_MNG	GW-ADR.
>192.168.202.210	

Setting the Network Mask

Selection frame:

SET	LAN_MNG
NETMASK	Y/N

Input frame:

LAN_MNG	NETMASK
>192.168.202.210	

Setting the Control Byte

Selection frame:

SET	LAN_MNG
CTRL. - BYTE	Y/N

Input frame:

CTRL. - B	76543210
LAN_MNG >	10100001

4.2.9 Frequency Output (Option)

When the System is extended with the Frequency Output Board, the frequency output can be set between 1Hz and 10MHz in steps of 1Hz using this function.

The input mode is explained in the description of the Frequency Output Board.

Frequency Input

Selection frame:

SET	FREQUENCY
	Y/N

Input frame:

FREQUENCY, Hz
>10. 000. 000Hz

⇒ corresponds to 10MHz

Frequency Output Delay

Selection frame:

SET	FREQUENCY
TimeON/OFF	Y/N

Input frame:

TimeON/OFF, min
>000/002<

The output behaviour of the Frequency Board can be defined with **TimeON** and **TimeOFF**.

The **TimeON** timer defines how long the System has to run in synchronization status "R" before the output is enabled. This setting can be used to ensure that the base System is in a precisely regulated state.

The **TimeOFF** timer can be used to define how long the transmission should continue although the System has changed synchronization status from "R" to "C".

Timer	Input values
TimeON	0...255min.
TimeOFF	2...255min.

4.2.10 Status and Pulse Output

A programmable output is available on the internal connector (pin **8C**) which can be assigned with status message, cyclical pulse or DCF77 pulse (1 Hz).



The setting must not be changed by 1U devices; otherwise the status output of the status LEDs and error relays will be faulty. Set value for 1U Systems = 0000 0001

Programming takes place by entering a byte. The input is selected with the following selection frame:

Pulse configuration

Selection frame:	SET PULSE
	OUTPUT Y/N

Input frame:	PULSE	76543210
	BYTE	>00000001

⇒ Reference value for 1U

In the second line, the individual bits can now be set to "0" or "1", whereby "1" is to be seen as a start-up function.

The meanings of the individual bits are as follows:

B7	Pulse Level Direction
0	Not inverted (⇒ low active)
1	Inverted (⇒ high active)



- If all bits in Mode 1, 2 and 3 are set to "0" (zero), Modes are disabled
⇒ there is no output on the pulse output.
- After disabling the Modes, it is recommended to trigger a program reset.



- Only one Mode can be enabled.
- Enabling of several Modes is prohibited. In the event of a prohibited configuration there is no output on the pulse output.
- If a function is set in the corresponding Mode, the bits of the other Modes must be set to "0" (zero).

The meaning of the individual bits of the Mode configuration:

B6	B5	Mode 3: DCF77	
0	0	Mode 3 disabled	
0	1	DCF77 pulse (time base: UTC)	
1	0	Not assigned (currently DCF77 pulse (time base: UTC))	
1	1	Not assigned (currently DCF77 pulse (time base: UTC))	

B4	B3	B2	B1	Mode 2: Cyclical Pulse Output
0	0	0	0	Mode 2 disabled
0	0	0	1	Second pulse, duration = 250msec
0	0	1	0	Minute pulse, duration = 1000msec
0	0	1	1	Not assigned (currently second pulse, duration = 250msec)
0	1	0	0	Hour pulse, duration = 1sec
0	1	0	1	Not assigned (currently second pulse, duration = 250msec)
0	1	1	0	Not assigned (currently second pulse, duration = 250msec)
0	1	1	1	Not assigned (currently second pulse, duration = 250msec)
1	0	0	0	Day pulse (local time 00:00:00), duration = 1000msec
1	0	0	1	Day pulse (local time 12:00:00), duration = 1000msec
1	0	1	0	Not assigned (currently second pulse, duration = 250msec)
1	0	1	1	Not assigned (currently second pulse, duration = 250msec)
1	1	0	0	Not assigned (currently second pulse, duration = 250msec)
1	1	0	1	Not assigned (currently second pulse, duration = 250msec)
1	1	1	0	Not assigned (currently second pulse, duration = 250msec)
1	1	1	1	Not assigned (currently second pulse, duration = 250msec)

B0		Mode 1: System Time Status Output
0		Mode 1 disabled
1		Output System synchronization status (radio mode)

4.2.11 Selection of the Time Base for the LCD-Display

Local or UTC time can be selected for the display.

<u>Selection frame:</u>	SET DISPLAY TIME Y/N
-------------------------	-------------------------

<u>Input frame:</u>	LOCAL=0 UTC=1 DISPLAY TIME>0
---------------------	---------------------------------

The following selections are available:

Display	Input
Local time	0
UTC	1

4.2.12 Selection of the Language for the Time Display on the LCD-Display

For the language for the time display, you can choose between German and English for the weekday and month views.

<u>Selection frame:</u>	SET LANGUAGE DAY/MONTH Y/N
-------------------------	-------------------------------

<u>Input frame:</u>	GERMAN=0 ENGL=1 LANGUAGE>1
---------------------	-------------------------------

The following selections are available:

Display	Input
German	0
English	1

4.2.12.1 SYSTEM Byte

Functions can be switched on and off with the individual bits in the System byte. No bits are allocated at present.

<u>Selection frame:</u>	SET SYSTEMBYTE Y/N
-------------------------	-----------------------

<u>Input frame:</u>	SYSTEM 76543210 BYTE >00000000
---------------------	-----------------------------------

⇒ These bit combinations should always be set for compatibility reasons

4.2.12.2 Keyword Function for Keypad

The System can be protected by a key-word against unauthorized changes via the keypad to the settings.



Warning: In the case of Systems 6844, if the keyword is lost this can only be reset at the hopf factory.

In 6844RC Systems, the keyword for the keyboard can be reset by triggering a factory default via the remote interface.



In order to avoid delays during commissioning, the keyword should only be set after commissioning has been completed. The keyword should be kept in a safe place and protected against unauthorized access.

If a keyword has been set then this is requested after a selection has been made from the main menu.

If the keyword is entered correctly then the display changes to the selected menu. The keyword protection is then deactivated until the selected menu has been exited. The keyword protection is automatically reactivated after exiting the menu by pressing **BR** or after 255 seconds without pressing a key.

No keyword is set up in the factory.

<u>Selection frame:</u>	<table border="1"> <tr><td>SET KEYPAD</td></tr> <tr><td>KEYWORD Y/N</td></tr> </table>	SET KEYPAD	KEYWORD Y/N
SET KEYPAD			
KEYWORD Y/N			
<u>Input frame:</u>	<table border="1"> <tr><td>SET/ENTER</td></tr> <tr><td>KEYWORD >7259<</td></tr> </table>	SET/ENTER	KEYWORD >7259<
SET/ENTER			
KEYWORD >7259<			

A 4 digit number can now be entered as the keyword. The entry must be completed by pressing the **ENT** key. The number sequence **0000** is an exception.

<u>Input frame:</u>	<table border="1"> <tr><td>SET/ENTER</td></tr> <tr><td>KEYWORD >0000<</td></tr> </table>	SET/ENTER	KEYWORD >0000<
SET/ENTER			
KEYWORD >0000<			

With this sequence of numbers the current keyword (if set) **is deleted** and the keyword protection is deactivated.


The keyword becomes active when the next selection is made from the main menu.

<u>Input frame:</u>	<table border="1"> <tr><td>KEY-WORD >*****<</td></tr> <tr><td> </td></tr> </table>	KEY-WORD >*****<	
KEY-WORD >*****<			

A star is displayed for each digit entry and is always automatically completed by an arrow after the fourth entry.

The keyword is confirmed by pressing the **ENT** key. If the keyword is correct entry is gained to the corresponding menu item.


After the first and second incorrect entry the following display appears for 5 seconds:

Display frame: 


After the third incorrect entry the following display appears for 5 seconds:

Display frame: 

After the fourth incorrect entry the following display appears for 5 seconds:

Display frame: 

When the next attempt is made to start the menu the following display appears:

Display frame: 

No further entries can be made for four hours. Switching the System on and off does not delete the lockout time.

In this condition the System remains fully functional as before. The display reverts back to the standard frame automatically after four minutes or by pressing the **BR** key.

4.3 SHOW Menu - Display of the System 6844(RC) Base Settings

The **SHOW** function is called up to check the values entered or the values updated via the GPS receiver. The values are only displayed here and cannot be changed.

After selecting the main menu by pressing **ENT** the figure **2** is entered. The first **SHOW** selection frame appears.

The **SHOW** menu selection frames are output on the display. The menu is controlled as follows:

- The next selection frame is displayed by entering **ENT** or **N**.
- The corresponding display frame is called up by entering **Y**.
- The display jumps to the next selection frame if **ENT** or **N** are entered in the display frame.
- The **SHOW** menu can be exited at any time by pressing **BR**.



After selecting the desired display frame, you can update the displayed parameters by pressing **Y**.

The individual functions of the System 6844(RC) GPS are explained below.

4.3.1 Satellite Values (GPS)

This display function indicates the number of satellites that theoretically lie in the visibility range of the antenna (V - visible); the actual number of received satellites (T - tracked); the satellites that are being received (PRN - satellite no.) and a relative measurement of reception performance.

This information is particularly helpful during installation and analysis of synchronisation problems (see **Chapter 8 System Indicators / Fault Analysis / Troubleshooting**).

If the System is set for 3D synchronization it is necessary for a minimum of four satellites to be in the visibility range of the antenna (tracked) in order to synchronize the GPS System 6844(RC) with UTC and to calculate the position. Under optimum conditions approx. 9-14 satellites are in the visibility range of the antenna, of which 12 can be received in parallel.

In the Position-fix mode at least one satellite is required for synchronization (however the position is not calculated in this case).

<u>Selection frame:</u>	SHOW SATELLITES
	Y/N

If values are available in the System then the display frame may appear as follows (example):

<u>Display frame 1:</u>	V 20: 095 13: 090
	10 07: 077 25: 075

<u>Display frame 2:</u>	T 10: 068 03: 063
	07 17: 051 : :

10 satellites are theoretically within visibility range, of which satellite 20 is captured by the GPS receiver with a relative signal/noise ratio of 95 and satellite 7 with a relative signal/noise ratio of 57, etc.

A maximum of eight satellites can be shown on the display. This takes place on two frames which are shown alternately every three seconds.



The **[Y]** key can also be used to manually switch between these two frames.

V (visible)

The number of satellites which are visible at this location with a theoretically optimum antenna position appears under **V** (visible). During the first reception process or after a lengthy voltage failure the value **00** appears under **V**.

Visible Value **0-14** is the number of satellites that can theoretically be picked up under optimum reception conditions, as calculated by the GPS receiver.

In addition, Visible Value **15-19** can represent an error message from the GPS receiver, if required. The error message output changes every second between "**V = 0**" and "**V = error message**".



If there are no figures under **V** ⇒ there is a fault on the GPS receiver.

T (tracked)

T (tracked) shows the number of satellites that the System is actually receiving.



The situation may temporarily arise that, due to an unfavourable constellation, the receiver may well pick up satellites that can not however be used to calculate the highly accurate time information. In such cases, it may occur that an adequate number of satellites are received but **synchronization of the System does not take place**.

Pseudo-Random-Number

The figure before the colon is the Satellite Pseudo Random Number. The satellites are not identified by 1, 2, 3 etc. but by the Pseudo Random Number under which the satellite radiates its information. If a satellite fails a reserve satellite can be activated under the same number.

Signal/Noise Ratio

The number after the colon indicates the signal/noise ratio as a relative value. This can vary between 0 and 255.

After the first installation it can take up to 30 minutes under the most unfavourable conditions until anything is presented on the display frame. This is dependent on the start information which the System receives (see Input Time, Position etc.) as well as the antenna position, e.g. no free antenna visibility to the sky.

Meaning of the Display Values	Signal/Noise Ratio
No satellite received	~~~
Under poor signal/noise conditions the values lie between resp. are not shown	000 - 030
Under satisfactory to good signal/noise conditions the values lie between	033 - 048
Under very good signal/noise conditions the values are	≥ 051

4.3.2 ERROR Byte

Erroneous functions or modules are displayed in the Error Byte for faster fault analysis. Logic "0" indicates that the function or module is operating perfectly. Logic "1" indicates that there is a fault condition.

Selection frame:	SHOW	ERRORBYTE
		Y/N
Display frame:	ERROR	76543210
	BYTE	>00000000

At present the following bits are allocated in the Error Byte:

B7	LAN MNG Communication (6844RC only)
0	no error
1	no communication with LAN MNG (can only be transmitted when the LAN MNG Board is enabled)
B6	
0	no error
1	not connected at present
B5	Keypad Keyword
0	no error
1	keypad blocked (at least 4x the wrong keyword entry)
B4	Daylight Saving Time (DST) Changeover
0	no error
1	incomplete data set for daylight saving time (DST) changeover
B3	
0	no error
1	not connected at present
B2	Control of the internal Quartz Basis
0	no error
1	Error in the quartz frequency adjustment
B1	GPS Receiver Status
0	no error
1	GPS out of sync. or V15 ... V19 error message
B0	GPS Receiver Communication
0	no error
1	no communication with GPS receiver

Error Bit 7 = 1 (no communication with LAN MNG)

The Control Board 6844RC is unable to connect to a logged on LAN Management Board / Module.

Error Bit 5 = 1 (Keypad blocked (at least 4x the wrong keyword entry))

A keyword was set for the keyboard and a wrong entry was made four times in succession. This error can only be read with the *hmc* remote software or a LAN Management Board / Module.

Error Bit 4 = 1 (incomplete data set for daylight saving time (DST) changeover)

The data for the daylight saving time (DST) changeover were not entered in full.

Error Bit 2 = 1

There is an error in the internal adjustment of the quartz frequency. The specified system accuracy and freewheel stability can't be guaranteed. According to the error the system stays in status 'C' (crystal).

Error Bit 1 = 1

The GPS receiver is not synchronized via the GPS signal or the GPS receiver has detected a problem that is preventing synchronization.

Error Bit 0 = 1

The Control Board 6844(RC) is unable to connect to the onboard GPS receiver.

4.3.3 Position

The input position of the equipment (antenna) or the position updated by GPS is shown on this display frame. The position data is updated by GPS every second (the display frame is only updated after the menu item has been called up again or by pressing **Y**).

<u>Selection frame:</u>	SHOW POSITION
	Y/N

<u>Display frame:</u>	LT. N51°12,6993'
	LN. E007°39,7994'

LT = Degree of latitude, **LN** = Degree of longitude

In the above example the position of *hopf* Elektronik GmbH is displayed.

4.3.4 Time Offset (Time Zone)

This display frame can be used to view the currently set time offset between local standard time (time zone) and UTC time.

<u>Selection frame:</u>	SHOW DIFF. - TIME
	(TIMEZONE) Y/N

After entering **Y** the following image is displayed, e.g.:

<u>Display frame:</u>	DIFF. - TIME
	> +01:00 <



Only the pre-set time offset to the local standard time (winter time) is ever displayed. No account is taken of any additional offset due to summer time.

4.3.5 Daylight Saving Time (DST) Changeover

The DST changeover points of time for the current year, calculated from the customer input, can be viewed with this display frame.



After a year change the clock system automatically recalculates the daylight saving time changeover points of time.

Time Zone Changeover S ⇒ D

This function shows the changeover point of time from **Standard** time (winter time) to **Daylight saving** time (summer time).

<u>Selection frame:</u>	SHOW CHANGE OVER
	DATE S->D Y/N

After entering **Y** the following frame appears (example):

<u>Display frame:</u>	S->D TIME >02:00
	SU 28/03/2010

The changeover takes (took) place on Sunday 28 March 2010 at 02.00 a.m.

Time Zone Changeover D ⇒ S

This function shows the changeover point of time from Daylight saving time (summer time) to Standard time (winter time).

Selection frame:

SHOW	CHANGE	OVER
DATE	D ->S	Y/N

After entering **Y** the following frame appears (example):

Display frame:

D ->S	TIME	>03: 00
SU	31/10/2010	

The changeover takes (took) place on Sunday 31 October 2010 at 03.00 a.m.

If no changeover dates are set in the System, the following frame appears in response to both requests:

Selection frame:

NO	CHANGE	OVER
DATES		

4.3.6 SyncOFF Timer – Delayed Change of Sync. Status

The current value set for the SyncOFF timer can be viewed with this display frame.

Also displayed is whether the SyncOFF timer is enabled and, if so, the remaining time until the timer expires and thus until the System synchronization status changes if no new synchronization was carried out up to this point of time.

Selection frame:

SHOW	SyncOFF
TIMER	Y/N

After entering **Y** the following image is displayed, e.g.:

Display frame:

SyncOFF	x=hh: mm
A=00: 50	S=01: 00

This display frame means that the SyncOFF timer was set to one hour and that this timer is active and will run for a further 50 minutes.

The timer is enabled as soon as the System ceases to be synchronized by the synchronization source. Dependent on the synchronization source, the timer can then count down to 00:00 in order to then lower the System status from "r" to "C"; alternatively it is again disabled if re-synchronization takes place by the synchronization source (see the following display frames).

Display frame:

SyncOFF	x=hh: mm
A=--: --	S=01: 00

 Timer not active

Display frame:

SyncOFF	x=hh: mm
A=00: 00	S=01: 00

 Timer lapsed

4.3.7 Serial Interface Parameters

With this menu the serial interface parameters can be shown.

4.3.7.1 Display Frames for the COM0 Serial Interface Parameters

The configuration of the COM0 interface is shown with these display frames. The significance of the configuration can be found in **Chapter 5 COM0 / COM1 Serial Interfaces**.

COM 0 Interface Parameter Displays

<u>Selection frame:</u>	SHOW COMO SERIAL PARAMETER Y/N
<u>Display frame:</u>	Bd: 09600 W: 8 P: N S: 1

Mode Byte 1 Displays

<u>Selection frame:</u>	SHOW COMO MODEBYTE_1 Y/N
<u>Display frame:</u>	ModB_1 76543210 COMO >11000000

Mode Byte 2 Displays

<u>Selection frame:</u>	SHOW COMO MODEBYTE_2 Y/N
<u>Display frame:</u>	ModB_2 76543210 COMO >00001100



Depending on the selected string, **Mode Byte 3** is also available in the menu for the required configuration of the string.

Mode Byte 3 Displays

<u>Selection frame:</u>	SHOW COMO MODEBYTE_3 Y/N
<u>Display frame:</u>	ModB_3 76543210 COMO >00000001

4.3.7.2 Display Frames for the COM1 Serial Interface Parameters

The configuration of the COM1 interface is shown with these display frames. The display functions are analogue to the COM0 interface display.

4.3.8 LAN Board Parameters

Further information and an explanation of the parameters can be found in the description of the LAN Board.



The LAN Board parameters are cyclically updated (approximately every 10 seconds) in Control Board 6844(RC), as these can also be changed via the WebGUI of the respective Board.

4.3.8.1 Display Frames for LAN Board 1 Parameters

The configuration of the LAN Board coded as Board 1 is displayed on this display frame.

IP Address Displays

Selection frame:

SHOW LAN_1
IP-ADR. Y/N

Display frame:

LAN_1	IP-ADR.
>192.168.202.210	

Gateway Address Displays

Selection frame:

SHOW LAN_1
GATEWAY-ADR. Y/N

Display frame:

LAN_1	GW-ADR.
>192.168.202.010	

Network Mask Displays

Selection frame:

SHOW LAN_1
NETMASK Y/N

Display frame:

LAN_1	NETMASK
>255.255.255.000	

Control Byte Displays

Selection frame:

SHOW LAN_1
CTRL. - BYTE Y/N

Display frame:

CTRL. - B	76543210
LAN_1	>00000010

4.3.8.2 Display Frames for LAN Board 2 Parameters

Selection frame:

SHOW LAN 2
IP-ADR. Y/N

The configuration of the LAN Board coded as Board 2 is displayed on this display frame.

The LAN Board 2 parameters are displayed in the same way as for LAN Board 1.

4.3.8.3 Display Frames for LAN Management Board Parameters (System 6844RC only)



Only displayed on System 6844RC when the LAN Management Board / Module is activated.

This display frame shows the configuration of the LAN Management Board.

IP Address Displays

<u>Selection frame:</u>	SHOW LAN_MNG
	IP-ADR. Y/N
<u>Display frame:</u>	LAN_MNG IP-ADR.
	>192.168.202.211

Gateway Address Displays

<u>Selection frame:</u>	SHOW LAN_MNG
	GATEWAY-ADR. Y/N
<u>Display frame:</u>	LAN_MNG GW-ADR.
	>192.168.202.010

Network Mask Displays

<u>Selection frame:</u>	SHOW LAN_MNG
	NETMASK Y/N
<u>Display frame:</u>	LAN_MNG NETMASK
	>255.255.255.000

Control Byte Displays

<u>Selection frame:</u>	SHOW LAN_MNG
	CTRL. - BYTE Y/N
<u>Display frame:</u>	CTRL. - B 76543210
	LAN_MNG>00000000

4.3.9 Frequency Output (Option)

The frequency set for the Frequency Output Board is displayed on this display frame as also the actual adjusted values for TimeON and TimeOFF.

Frequency Display

<u>Selection frame:</u>	SHOW FREQUENCY
	Y/N

<u>Display frame:</u>	FREQUENCY, Hz
	>09012350 Hz

Frequency Output Delay Display

<u>Selection frame:</u>	SHOW FREQUENCY
	TimeON/OFF Y/N

<u>Display frame:</u>	TimeON/OFF, min
	>000/002<

4.3.10 Status and Pulse Output

This display frame shows the configuration byte for the status and pulse output.

<u>Selection frame:</u>	SHOW PULSE
	OUTPUT Y/N

<u>Display frame:</u>	PULSE 76543210
	BYTE >00000001

⇒ Reference value for the 1U housing version

4.3.11 SYSTEM Byte

The System Status Byte is displayed with this display frame.

<u>Selection frame:</u>	SHOW SYSTEMBYTE
	Y/N

<u>Display frame:</u>	SYSTEM 76543210
	BYTE >00000000

No function is assigned to these bits at present.

4.3.12 ADD.Outputs (Digital I/O)

This display screen shows the current status of the 4 internal digital status outputs.

Selection frame: SHOW ADD. OUTPUTS
Y/N

Display frame: OUT 8765 4321
xxxx 1001

	Output OUT 4 : Common error alarm
0	ERROR byte is enabled
1	No error
	Output OUT 3 : SyncOFF Timer
0	active / lapsed
1	not active
	Output OUT 2 : Sync. Status
0	Sync.-Status: Invalid (-), Quartz (C)
1	Sync.-Status: Radio without regulation (r), Radio (R)
	Output OUT 1 : System time
0	Invalid \Rightarrow Sync.-Status = "-"
1	Valid \Rightarrow Sync.-Status = "C", "r", "R"

4.3.13 ADD.Inputs (Digital I/O)

This display screen shows the current status of the 4 internal digital signal inputs.

Selection frame: SHOW ADD. INPUTS
Y/N

Display frame: IN 8765 4321
xxxx 0000

No function is currently assigned to these bits.

4.4 S.CLOCK Menu - Control of Slave Clocks with Function Board 7406

After selecting the main menu by pressing the **ENT** key the figure **3** is entered. The following selection frame appears:

<u>Selection frame:</u>	<table border="1"> <tr><td>SLAVE CLOCK</td></tr> <tr><td>LINE 1 . . 4 >_</td></tr> </table>	SLAVE CLOCK	LINE 1 . . 4 >_
SLAVE CLOCK			
LINE 1 . . 4 >_			

Further information and an explanation of the parameters can be found in the description of the Function Board 7406.

4.5 INI Menu - System 6844(RC) Extended Settings/Functions

Different settings can be configured for special applications and problem solutions using the **INI** menu. These functions are pre-set to Standard in the factory.

After jumping to the main menu display by pressing the **ENT** key the figure **4** is entered.

Pressing the **BR** key returns the user to the standard display.

4.5.1 Display the Firmware Version of Board 6844(RC)

This function is used to display the current firmware version of Board 6844(RC).

<u>Selection frame:</u>	<table border="1"> <tr><td>FIRMWARE VER.</td></tr> <tr><td>Y/N</td></tr> </table>	FIRMWARE VER.	Y/N
FIRMWARE VER.			
Y/N			

e.g.

<u>Display frame:</u>	<table border="1"> <tr><td>SYSTEM 6844</td></tr> <tr><td>V01.00 31/MAY/10</td></tr> </table>	SYSTEM 6844	V01.00 31/MAY/10
SYSTEM 6844			
V01.00 31/MAY/10			

4.5.2 Display the PCID (Product Config ID) of Board 6844(RC)

This function is used to display the PCID (Product Config ID) of Board 6844(RC). The PCID is displayed in 3 successive display frames.

<u>Selection frame:</u>	<table border="1"> <tr><td>PRODUCT CONFIG</td></tr> <tr><td>ID (PCID) Y/N</td></tr> </table>	PRODUCT CONFIG	ID (PCID) Y/N
PRODUCT CONFIG			
ID (PCID) Y/N			
<u>Display frame 1:</u>	<table border="1"> <tr><td>1: 01 6844 011146</td></tr> <tr><td> D 1 100819820A</td></tr> </table>	1: 01 6844 011146	D 1 100819820A
1: 01 6844 011146			
D 1 100819820A			
<u>Display frame 2:</u>	<table border="1"> <tr><td>2: 02003109110002</td></tr> <tr><td> 01001803100002</td></tr> </table>	2: 02003109110002	01001803100002
2: 02003109110002			
01001803100002			
<u>Display frame 3:</u>	<table border="1"> <tr><td>3: 0006 0001</td></tr> </table>	3: 0006 0001	
3: 0006 0001			

The **[+]** and **[-]** keys are used to scroll the display frames up / down.



The PCID allows *hopf* Elektronik GmbH to make decision about the respective System - from the distance - in support cases or, for example, when product extensions are desired. The PCID allows faster and more effective processing in support cases or other issues concerning the System.

4.5.3 3D / Position-fix GPS Reception and Synchronization Mode

3D Evaluation

The accuracy of the time evaluation is defined by the exact positional calculation of the installation location. A minimum of four satellites is required for this calculation (3D evaluation). The signal transmission times to several satellites are defined from the calculated position and the exact second mark is produced from their mean value.

Position-fix Evaluation

In the Position-fix mode the System can be synchronized with only one received satellite. In this case the accuracy depends heavily on the exact entry of the installation position location. The second mark is then calculated on the basis of the position entered. If four or more satellites are received in Position-fix mode then the evaluation switches automatically into 3D mode for this time period and calculates the exact position. By this means the accuracy of the Position-fix evaluation increases to the accuracy of the 3D evaluation.



When the position is entered to ± 1 minute degree the accuracy of the second mark is already better than $\pm 20\mu\text{sec}$.

Position-fix Evaluation Features	3D Evaluation Features
<ul style="list-style-type: none"> • Clock can synchronize with only one received satellite. • Accuracy depends on the exact entry of the position. • If four or more satellites are received in this mode then the evaluation switches automatically into 3D mode for this time period and calculates the exact position. • The antenna can also be installed in locations from where less than $\frac{1}{4}$ of the sky is visible. 	<ul style="list-style-type: none"> • The System can not be synchronized if less than four satellites are received. • The position is calculated automatically. • The accuracy of the synchronization is increased by the exact calculation of position. • The antenna usually requires more than $\frac{1}{4}$ free visibility of the sky.

The modes are set as follows:

Selection frame:	<table border="1"> <tr> <td>GPS MODE</td></tr> <tr> <td>POS. FIX/3D Y/N</td></tr> </table>	GPS MODE	POS. FIX/3D Y/N
GPS MODE			
POS. FIX/3D Y/N			

For the Position-fix evaluation this is:

Display frame:	<table border="1"> <tr> <td>GPS MODE</td><td></td><td></td></tr> <tr> <td>>POS. FIX<</td><td>+/-</td><td></td></tr> </table>	GPS MODE			>POS. FIX<	+/-		Default Value: 3D
GPS MODE								
>POS. FIX<	+/-							

The following frame appears for 3D evaluation:

Display frame:	<table border="1"> <tr> <td></td><td>GPS MODE</td><td></td><td></td></tr> <tr> <td>></td><td>3D</td><td><</td><td>+/-</td></tr> </table>		GPS MODE			>	3D	<	+/-
	GPS MODE								
>	3D	<	+/-						

The evaluation can be changed between the two modes with the **[+]** and **[-]** sign.

4.5.4 DCF77 Pulse (1Hz) / DCF77 Antenna Simulation (77.5kHz)

This Chapter describes the configuration of the DCF77 pulse(s) and DCF77 antenna simulation (77.5 kHz).



In System 6844(RC), **one** DCF77 pulse (1 Hz) is available as standard (DCF77.SYS). This DCF77 pulse is available to other Function Boards on the internal System-Bus; however, the same DCF77 pulse is also used to produce DCF77 antenna simulation (77.5 kHz) of Control Board 6844(RC) (DCFSIM). Account must be taken of this when configuring this pulse.

4.5.4.1 Signal DCF77.SYS / DCF77 Antenna Simulation (77.5kHz)



All settings described in this Chapter affect both signal DCF77.SYS and DCF77 antenna simulation (77.5 kHz).

4.5.4.1.1 Display and Set the DCF77.SYS Configuration

In this display frame, both the current settings for signal DCF77.SYS are displayed and the new values are entered.

<u>Selection frame:</u>	DCF77. SYS	
	CONF. BYTE	Y/N
	A = 10000000	

<u>Display frame:</u>	BYTE	A = 10000000
	B7 .. 0	> 00000000

B7	B6	Time Base
0	0	Local time (time zone time with DST changeover)
0	1	Standard time (time zone time without summer time)
1	0	UTC
1	1	Not assigned (currently local time)
B5 .. B0	Not assigned	
x	Not assigned	

4.5.4.1.2 Display and Set DCF77.SYS TimeOFF

The value for **DCF77.SYS TimeOFF** can be set between **002** and **255** minutes, and is used for time-restricted transmission of signal DCF77.SYS after synchronization of the System to Sync.-status "C".

<u>Selection frame:</u>	DCF77. SYS	
	TimeOFF	Y/N

The following is displayed for the Position-fix evaluation:

<u>Display frame:</u>	DCF77. SYS	Default value: 55min.
	TimeOFF > 055 < min	



When **DCF77.SYS (/ ADD) TimeOFF = 255 minutes**, the DCF77 signal (pulse / simulation) is always transmitted as soon as a valid time is available in the System.

4.5.4.2 Signal DCF77.ADD (Option)

In System 6844(RC), there is an option to enable a second DCF77 pulse.



The following menu items only appear when signal DCF77.ADD is enabled.

4.5.4.2.1 Display and Set DCF77.ADD Configuration

In this display frame, both the current settings for signal DCF77.ADD are displayed and the new values are entered.

<u>Selection frame:</u>	<table border="1"> <tr><td colspan="3">DCF77. ADD</td></tr> <tr><td>CONF. BYTE</td><td>Y / N</td><td></td></tr> </table>	DCF77. ADD			CONF. BYTE	Y / N	
DCF77. ADD							
CONF. BYTE	Y / N						
<u>Display frame:</u>	<table border="1"> <tr><td>BYTE</td><td>A = 10000000</td></tr> <tr><td>B7..0</td><td>>01000000</td></tr> </table>	BYTE	A = 10000000	B7..0	>01000000		
BYTE	A = 10000000						
B7..0	>01000000						

Configuration takes place in the same way as for signal DCF77.SYS.

4.5.4.2.2 Display and Set DCF77.ADD TimeOFF

Signal DCF77.ADD has no separate TimeOFF. If signal DCF77.ADD is enabled, DCF77.SYS and DCF77.ADD will be set to the same timer value.

<u>Selection frame:</u>	<table border="1"> <tr><td colspan="3">DCF77. SYS/ADD</td></tr> <tr><td>TimeOFF</td><td>Y / N</td><td></td></tr> </table>	DCF77. SYS/ADD			TimeOFF	Y / N	
DCF77. SYS/ADD							
TimeOFF	Y / N						
<u>Display frame:</u>	<table border="1"> <tr><td>DCF77. SYS/ADD</td><td></td></tr> <tr><td>TimeOFF >055<min</td><td></td></tr> </table>	DCF77. SYS/ADD		TimeOFF >055<min			
DCF77. SYS/ADD							
TimeOFF >055<min							

Default value: 55min.

4.5.5 IRIG-B (Digital) Output

This Chapter describes the structure and configuration of the digital IRIG-B signal that is available in the System.


4.5.5.1 IRIG Time Code, Structure and Timing Diagram

The IRIG time code format consists of a time code with 74 bits and has a repetition rate of one second. The bit frame is 10 msec. The bit rating is represented by pulse width modulation and is a multiple of one millisecond.

In the case of analog output, the positive zero crossing of a sine wave (carrier frequency 1000 Hz) is modulated with the rising edge of the IRIG signal. The modulation depth should be between 3:1 and 6:1 for signal information of H/L level.

For synchronization at the start of the second, a neutral logical state - referred to as an identifier - is required.

- Logic 0 = 2 msec H level
- Logic 1 = 5 msec H level
- Identifier = 8 msec H level

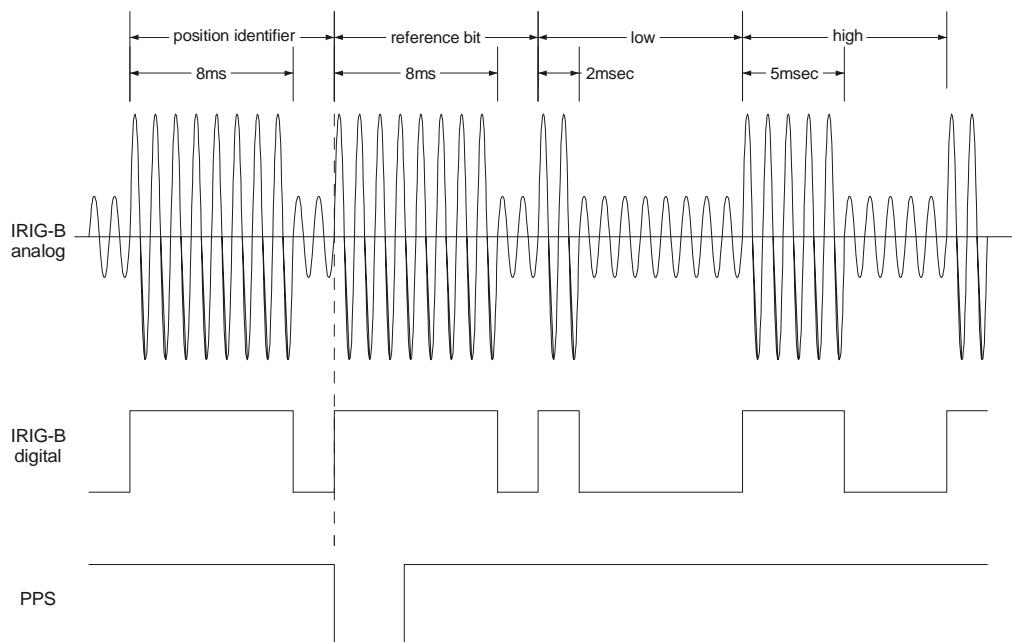

The 74 time code bits are divided into:

- 30 bits for the BCD value of seconds, minutes, hours, and the current day of the year
- 27 bits for the input of control information
- 17 bits for the binary value of the current day seconds

100 bit frames can be transmitted in one second. Unused bit frames are filled with a logical zero.

4.5.5.1.1 IRIG-Bxxx Format Classes in accordance with IRIG Standard 200-04

The signal output can be both digital and analog with different data content. The variations are identified by attaching a three-digit combination of numbers. The digits indicate the following:

Digit 1	0	= digital output
	1	= analog output via carrier signal
Digit 2	0	= no carrier signal
	1	= carrier signal 100 Hz
	2	= carrier signal 1000 Hz
Digit 3	0	= time, second of day, control information
	1	= time, control information
	2	= time
	3	= time, second of day
	4	= time, year, second of day, control information
	5	= time, year, control information
	6	= time, year
	7	= time, year, second of day

e.g. **IRIG-B123** = analogue output, carrier signal 1000 Hz
= time information data content and binary seconds of day

4.5.5.1.2 IEEE1344-1995

This IRIG Time Code Standard is based on IRIG Standard 200-89. Fixed data such as year, time offset, etc. are assigned to the 27 bits of the control information field.

IRIG Standard 200-89 is included as a sub-section of IEEE1344.

4.5.5.1.3 AFNOR NFS 87-500

The AFNOR NFS 87-500 Code is similar to the IRIG Time Code Standard. It was established by the French Standards Association. It is based on IRIG Standard 200-89.

IRIG-B Standard 200-89 is included in part as a sub-section of AFNOR NFS 87-500.

4.5.5.2 Display and Set IRIG-B.(1) Configuration

In this display frame, both the current settings for the **IRIG-B Time Code** signal generation for signal IRIG-B.(1) are displayed and the new values are entered.

<u>Selection frame:</u>	I R I G - B . (1)	
	CONF. BYTE	Y / N
<u>Display frame:</u>	BYTE A = 10000000	
	B 7 . . 0	> 10000001

Assignment of the **IRIG-B.(1) CONF.BYTE**

B7	B6	Time Base
0	0	Local time (time zone time with daylight saving time (DST) changeover)
0	1	Standard time (time zone time without summer time)
1	0	UTC
1	1	Not assigned (currently local time)

B5	Not assigned
x	Not assigned

B4	IRIG Time Code Signal Output
0	Not inverted
1	Inverted

B3	Not assigned
x	Not assigned

Bit 2	Bit 1	Bit 0	IRIG Time Code Format
0	0	0	IRIG-B - B002 (time)
0	0	1	IRIG-B - B006 (time, year)
0	1	0	IRIG-B - B003 (time, second of day)
0	1	1	IRIG-B - B007 (time, year, second of day)
1	0	0	IEEE1344
1	0	1	AFNOR NFS 87-500
1	1	0	Not assigned (currently IEEE1344)
1	1	1	Not assigned (currently IEEE1344)



The IRIG-B output is in accordance with **IRIG Standard 200-04**.

4.5.5.3 Display and Set IRIG-B.(1) TimeOFF

The value for **IRIG-B (1) TimeOFF** can be set between **002** and **255** minutes, and is used for the time-limited output of the IRIG time code after synchronization of the System to Quartz Status 'C'.

<u>Selection frame:</u>	I R I G - B . (1)	
	TimeOFF	Y / N
<u>Input frame:</u>	I R I G - B . (1)	
	TimeOFF >005<min	

The time can be increased by pressing the **[+]** key and reduced with the **[-]** key.

When quitting the program by pressing **[BR]** the last displayed value is stored in fail-safe manner.



When **IRIG-B.(1) TimeOFF = 255** minutes, the IRIG time code is always transmitted as soon as a valid time is available in the System.

4.5.5.4 IRIG-B.(2) Configuration/TimeOFF (Option)

In System 6844(RC), there is an option to enable a second digital IRIG-B output.



The following menu items only appear when the IRIG-B.(2) signal is enabled.

Selection frame:

	IRIG - B. (2)
CONF. BYTE	Y/N

and

Selection frame:

	IRIG - B. (2)
TimeOFF	Y/N

Configuration takes place in the same way as for the IRIG-B.(1) signal.

4.5.6 Activate LAN Management Board (Board 6844RC only)

In order that the LAN Management Board / Module of Control Board 6844RC can be configured and monitored, the LAN Management Board / Module must be activated in the 6844RC menu.

Selection frame:

	LAN MANAGEMENT
BOARD ACTIV.	Y/N

Input frame:

	LAN_MNG>DEACTIV.
	+ / -

or

Input frame:

	LAN_MNG>ACTIV.
	+ / -

The LAN Management Board / Module is activated or deactivated in the 6844RC with the **[+]** and **[-]** key (ACTIVATION/DEACTIVATION).

An activated LAN Management Board / Module will be monitored for its presence. If an error is detected here, this will be indicated in the ERROR byte.

4.5.7 Trigger Reset / Default

In System 6844(RC), a reset or default can be triggered in a differentiated way, in the System or in individual components.

Selection frame:

RESET/DEFAULT		
Y/N		

Input frame:

RESET:	SW=1	HW=2
GPS=3	DEF=9	>_

A software-reset is triggered by pressing the **1** key followed by **ENT**.

A hardware-reset is triggered by pressing the **2** key followed by **ENT**.

A default of the GPS receiver is triggered by pressing the **3** key followed by **ENT**.

A factory default is triggered by pressing the **9** key followed by **ENT**.

The respective action is triggered approximately 3 seconds after pressing the **ENT** key.

4.5.7.1 Software-Reset (Control Board 6844(RC) only)

This function triggers a software reset of the System 6844(RC) Control Board. All other Function Boards in the System continue to run (except Function Boards without their own processor).



This function has no effect on the failsafe-stored data.

4.5.7.2 Hardware-Reset (Complete System)

This function triggers a hardware reset of the whole System 6844(RC). All Function Boards present in the System 6844(RC) are reset and restarted.



This function has no effect on the failsafe-stored data.

4.5.7.3 Trigger the GPS Receiver Default

This function triggers a default of the onboard GPS receiver located on Control Board 6844(RC). All data stored in the GPS receiver, for example leap second information, are deleted and have to be recalculated by the GPS receiver. This may take about 12-13 minutes if there is satellite reception during this time. Failure of satellite reception may extend this time.



This function has no effect on the data stored fail-safe on Control Board 6844(RC).

4.5.7.4 Factory Default (Control Board 6844(RC) only)

This function triggers a factory default of the entire Control Board 6844(RC) including GPS receiver. Furthermore, all Function Boards present in System 6844(RC) are reset and rebooted.



This function resets **almost every** setting of the Control Board to factory default values. For exceptions see **Table 11.1 Factory-Default Values**

5 COM0 / COM1 Serial Interfaces

The System is equipped with two serial interfaces **without** handshake lines which can be set up individually. Data exchange can take place via RS232c (V.24) or RS422 (V.11) signal levels. The signals can be used, for example, to transmit time telegrams to other computers.

Various data strings are available. Customer-specific data strings are available on request. The following settings can be made separately for each serial interface.



Alternatively, System pulses can also be transmitted via the serial interface hardware (see **Chapter 5.1.2.8 Mode Byte 2 / Bit7: Output Mode DATA STRING / PULSES**).

5.1 Configuration of the Serial Interfaces / Pulse Output


The parameterization and functionality of the serial interfaces respectively the selection of pulses is described below.

5.1.1 Serial Transmission Parameters

The interfaces are parameterized via the keypad. The baud rate, data bit, stop bit and parity settings are made by pressing the **ENT** key and selecting the **SET** menu.


The entry for **COM0**, **COM1** or optical interface (not supported in this equipment version) must be selected in the selection dialog. In the following only the **COM0** interface is described. The same settings are applicable to **COM1**.

- Key **ENT**
- Key **1** for **SET** menu
- Pressing Key **N** until the following menu appears

Selection frame: 

- Key **Y**

The interfaces / parameters dialog appears on the display with the following message:

Input frame: 

The baud rate must be entered here as a five digit numerical value. Possible inputs are:

- 19200 for 19,200 baud
- 09600 for 9,600 baud
- 04800 for 4,800 baud
- 02400 for 2,400 baud
- 01200 for 1,200 baud
- 00600 for 600 baud
- 00300 for 300 baud
- 00150 for 150 baud

After entering the final figure for the baud rate the following message appears on the display:

<u>Input frame:</u>	Bd: 09600	W: _
---------------------	-----------	------

The number of data bits for the transmission must be given here. Possible settings are:

- 8 for 8 data bits
- 7 for 7 data bits

After entering the figure for the number of data bits the following message appears on the display:

<u>Input frame:</u>	Bd: 09600	W: 8
	P: _	

The type of the parity bit for the transmission must be given here. Possible settings are:


- N for no parity bit
- E for even parity
- 0 (zero) for odd parity

After entering the parity function the following message appears on the display:

<u>Input frame:</u>	Bd: 09600	W: 8
	P: N	S: 1

The number of stop bits for the transmission must be selected here:

- 1 for 1 stop bit
- 2 for 2 stop bits

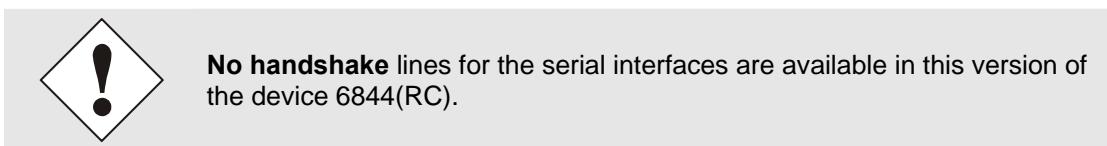

The **[ENT]** key must be activated after the final entry. By doing so a plausibility check of the complete data entry is undertaken. If the data entry is valid the new settings are transferred.


5.1.2 Configuration of the Data String (Mode Byte)

The received time information can be transmitted via the interfaces in several data strings with indication of the internal synchronization status of the clock.


By this means it is possible for the user to synchronize connected computer equipment with a highly precise time. The respectively desired transmission point of time, string construction and the control characters used can be selected via the data in **Mode Bytes 1 and 2**.

The **SET** menu for the **mode bytes** can be reached via the following key combination:


- Key **ENT**
- Key **1** for **SET** menu
- Pressing Key **N** until the following menu appears


Selection frame: 

or

Selection frame: 


and in addition a Mode Byte 3 is available for special strings

Selection frame: 

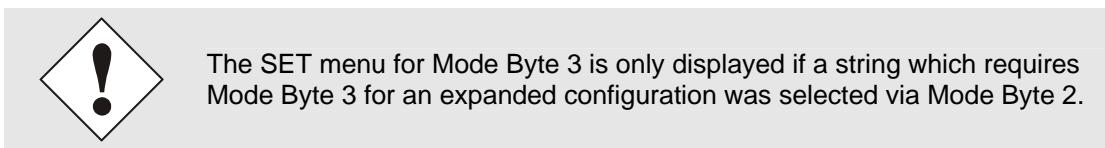

- Key **Y**

The input mask for the **Mode Byte** appears:

Input frame: 

The cursor now lies under bit position 7. Each bit should be understood to be a switch with which settings can be made in the operating type (mode) of the serial interface. Depending on the desired serial interface operating type the following entries must be made under the bit positions:

- 0 - for switch off or
- 1 - for switch on

The meanings of the individual bit positions (switches) are described in the following chapters.

5.1.2.1 Mode Byte 1 / Bit7 - Local Time or UTC in the Serial Output

Bit Position 7	Time Zone
off	UTC (Universal Coordinated Time)
on	Local time

5.1.2.2 Mode Byte 1 / Bit 6 - Serial Output Second Forerun

Bit Position 6	Second Forerun
off	With second forerun
on	Without second forerun

See also **Chapter 5.2 Data String Transmission Points of Time**.

5.1.2.3 Mode Byte 1 / Bit 5 - Bit 5 currently no function

Bit Position 5	
off	Not assigned
on	Not assigned

5.1.2.4 Mode Byte 1 / Bit 4 - Last Control Character at Second Change (On-Time Mark)

The last control character (see data string construction) can be transmitted exactly at the next second change with this setting.

Bit Position 4	Control Character at Second Change
off	With control character at second change
on	Without control character at second change

See also **Chapter 5.2 Data String Transmission Points of Time**.



This function is usually used in conjunction with the "with second forerun" setting.

5.1.2.5 Mode Byte 1 / Bit 3 - Reverse Control Characters CR and LF

The character sequence CR and LF can be reversed with this switch.

Bit Position 3	Control Characters CR and LF
off	LF/CR sequence as in string description
on	LF/CR sequence reversed from string description

5.1.2.6 Mode Byte 1 / Bit 2 - Delayed Transmission

The last character of the data string is transmitted directly at the second change and immediately thereafter the new data string, which is valid for the next second change, is transmitted with the setting "Control Character at Second Change". This can be interpreted as an error on some computers with a high working load. With Bit Position 2, transmission of the new data string can be delayed dependent on the baud rate.

Bit Position 2	Transmission Delay
off	With delayed transmission
on	Without delayed transmission

See also **Chapter 5.2 Data String Transmission Points of Time**.

Example:**Baud rate 9600 baud**

<u>Milliseconds</u>	<u>With delay</u>	<u>Without delay</u>
000	End character (ETX)	End character (ETX)
002	–	New data string
025	–	End new data string
930	New data string	–
955	End new data string	–
000	End character (ETX)	End character (ETX)

Baud rate 2400 baud

<u>Milliseconds</u>	<u>With delay</u>	<u>Without delay</u>
000	End character (ETX)	End character (ETX)
002	–	New data string
105	–	End new data string
810	New data string	–
913	End new data string	–
000	End character (ETX)	End character (ETX)

5.1.2.7 Mode Byte 1 / Bit1-Bit0 - Data String Transmission Point of Time

Bit 1	Bit 0	Transmission Point of Time
off	off	Transmit every second
off	on	Transmit on minute change
on	off	Transmit on hour change
on	on	Transmit on enquiry only

5.1.2.8 Mode Byte 2 / Bit7: Output Mode DATA STRING / PULSES

Bit 7	Output Mode
off	Output: Data String
on	Output: Pulses



When the pulse output is activated, all other serial interface settings are ignored.

5.1.2.9 Mode Byte 2 / Bit6-Bit0 - Data String Selection

The transmitted data string is set with this Mode Byte. In this regard, account must be taken of Mode Byte 2 setting bit 7 (see **Chapter 5.1.2.8 Mode Byte 2 / Bit7: Output Mode DATA STRING / PULSES**).



Bits B6-B4 are not currently assigned and must be set to **off**.

Bit Position				Data String Construction
3	2	1	0	
off	off	off	off	hopf Standard String (6021) respectively NTP
off	off	off	on	hopf 2000 - 4 digit year output
off	off	on	off	hopf Master/Slave-String
off	off	on	on	SINEC H1
off	on	off	off	T-String
off	on	off	on	IBM Sysplex Timer Model 1+2 and respectively TimeServ
off	on	on	off	ALOHA
off	on	on	on	SINEC H1 Extended
on	off	off	off	NMEA - GPRMC
on	off	off	on	SAT 1703 Time String
on	off	on	off	NMEA - GPZDA
on	off	on	on	GPS2000
on	on	off	off	IEC-103 (ASDU Type 6)
on	on	off	on	ABB-SPA



The hopf Master/Slave-String is always transmitted if a data string that is not assigned in the System is selected

5.1.2.10 Mode Byte 2 / Bit6-Bit0: Pulse Selection

The transmitted pulse is set with this Mode Byte. In this regard, account must be taken of Mode Byte 2 setting bit 7 (see **Chapter 5.1.2.8 Mode Byte 2 / Bit7: Output Mode**).



Bits B6-B4 are not currently assigned and must be set to **off**.

Bit Position				Pulse
3	2	1	0	
off	off	off	off	IRIG-B.(1)
off	off	off	on	IRIG-B.(2) [1]
off	off	on	off	DCF77.SYS
off	off	on	on	DCF77.ADD [1]
off	on	off	off	Pulse IMP1 [1]
off	on	off	on	Pulse IMP2 [1]
off	on	on	off	Pulse IMP3 [1]
off	on	on	on	Pulse IMP4 [1]
on	off	off	off	Frequency 1 [1]
on	off	off	on	Frequency 2 [1]
on	off	on	off	SystemPPS
on	off	on	on	Sync-Source PPS (e.g.. GPS)

[1] Optional functions, dependent on the software / hardware configuration.



The **DCF77.Sys signal** is always transmitted if a pulse is selected that is not available in the System, or not assigned

5.1.2.11 Mode Byte 3 / Bit7-Bit0

The configuration of Mode Byte 3 is dependent on the preset data string. Explanations about this are given in the relevant chapter concerning the data string.

5.1.3 Serial Data String Request

Serial data string requests that are not included in this Chapter are described under Data Strings.

5.1.3.1 Serial Requests with ASCII Characters (*hopf Standard and hopf 2000*)

The transmission of a data string can also be triggered by the user on enquiry by means of an ASCII character. The following characters trigger the transmission of the standard string:

- ASCII "D" - for Time / Date (Local Time)
- ASCII "G" - for Time / Date (UTC Time)

The System answers within 1msec. with the corresponding data string.

Since this is often too fast for the requesting computer, it is also possible to realize a response delay in 10msec. steps on request via software. For the delayed transmission of the data string, the requesting computer transmits the lower case letters "d, g" to the clock with a two position multiplication factor.


The clock interprets the multiplication factor as a hexadecimal value.

Example:

The computer transmits **ASCII gFF** (Hex 67, 46, 46)

The clock transmits the Time / Date (UTC Time) data string after approx. 2550 milliseconds.

5.2 Data String Transmission Points of Time

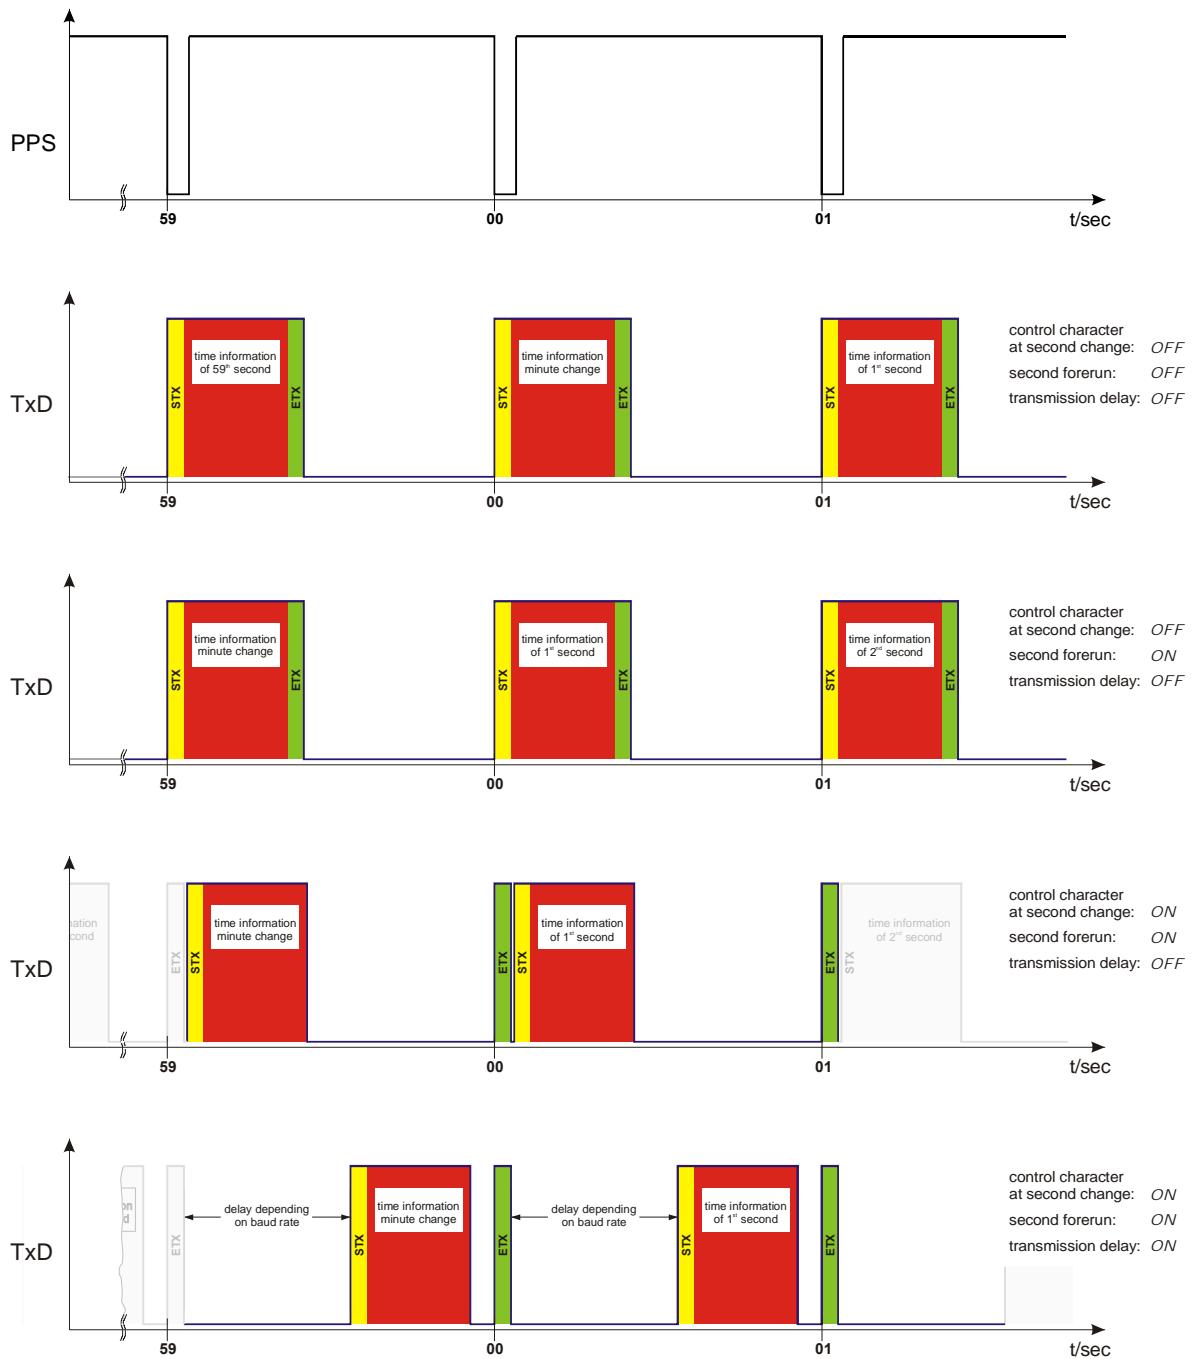

STX ⇌ Start of Text

ETX ⇌ End of Text

5.3 Data Strings

This Chapter describes the data strings supported by this System.

5.3.1 General Information about Data Output of Board 6844(RC) GPS

When "last control character at second change" is set there is a transmission gap of up to 970msec., depending on the baud rate. This should be taken into consideration when programming the time-out on the reception side.

The output of control characters CR and LF can be reversed with **Mode Byte 1** on all data strings

(see **chapter 5.1.2.5 Mode Byte 1 / Bit 3 - Reverse Control Characters CR and LF**).

Possible string-specific settings are specified for all data strings.

These are differentiated as follows:

Automatic:	Automatic string settings are set "automatically" by the System immediately after the selection of a data string. Customer settings are not required.
Required:	Required string settings must be set by the customer after selection of a data string in the mode byte.
Blocked:	Blocked settings are not permissible for a data string. The System does not accept such an input and the data string is transmitted without an error message and with the previously set parameters.

The transmitted data strings are at present compatible with the data strings of the following *hopf* radio-controlled clock boards:

- Board 6020/6021 Standard with control characters
- Board 7200/7201 Standard with control characters
- Board 7220/7221 Standard with control characters
- Board 7240/7245 Standard with control characters
- Board 6840/6841 Standard with control characters
- System 4465 Standard with control characters
- System 6870 Standard with control characters

5.3.2 *hopf* Standard String (6021)

Below the *hopf* Standard String is described.

5.3.2.1 Specified Settings

Automatic:	no
Required:	no
Blocked:	no

5.3.2.2 Structure

Character No.	Meaning	Hex-Value
1	STX (start of text)	\$02
2	status (internal clock status)	\$30-39, \$41-46
3	day of the week (1=Monday ... 7=Sunday) for UTC time bit 3 is set to 1 in the day of the week	\$31-37
4	tens hour	\$30-32
5	unit hour	\$30-39
6	tens minute	\$30-35
7	unit minute	\$30-39
8	tens second	\$30-36
9	unit second	\$30-39
10	tens day	\$30-33
11	unit day	\$30-39
12	tens month	\$30-31
13	unit month	\$30-39
14	tens year	\$30-39
15	unit year	\$30-39
16	LF (line feed)	\$0A
17	CR (carriage return)	\$0D
18	ETX (end of text)	\$03

5.3.2.3 Status

The second and the third ASCII-character contain the status and the day of the week.
The status is decoded binary.

	b3	b2	b1	b0		Meaning
Status:	x	x	x	0		no announcement hour
	x	x	x	1		announcement (DST changeover)
	x	x	0	x		standard time
	x	x	1	x		daylight saving time (DST)
	0	0	x	x		time / date invalid
	0	1	x	x		crystal operation
	1	0	x	x		radio operation
	1	1	x	x		radio operation (high accuracy)

Day of the Week:	0	x	x	x		CEST / CET
	1	x	x	x		UTC - time
	x	0	0	1		Monday
	x	0	1	0		Tuesday
	x	0	1	1		Wednesday
	x	1	0	0		Thursday
	x	1	0	1		Friday
	x	1	1	0		Saturday
	x	1	1	1		Sunday

Status	operation mode	time	announcement SZ-WZ-SZ
0 = 0000	time invalid	winter	no announcement
1 = 0001	time invalid	winter	announcement
2 = 0010	time invalid	summer	no announcement
3 = 0011	time invalid	summer	announcement
4 = 0100	quartz	winter	no announcement
5 = 0101	quartz	winter	announcement
6 = 0110	quartz	summer	no announcement
7 = 0111	quartz	summer	announcement
8 = 1000	radio	winter	no announcement
9 = 1001	radio	winter	announcement
A = 1010	radio	summer	no announcement
B = 1011	radio	summer	announcement
C = 1100	radio	winter	no announcement
D = 1101	radio	winter	announcement
E = 1110	radio	summer	no announcement
F = 1111	radio	summer	announcement

5.3.2.4 Example

(STX)E4123456180702(LF)(CR)(ETX)

- It is Thursday 18.07.2002 - 12:34:56 o'clock.
- radio operation (high accuracy)
- daylight saving time
- no announcement of a changeover
- () - ASCII-control characters e.g. (STX)

5.3.3 *hopf2000 - 4 Digit Year Output*

Below the data string *hopf2000 - 4 Digit Year Output* is described.

The structure of the data string is the same as the standard string and differs only in as much as the year is transmitted with 4 digits.

5.3.3.1 Specified Settings

Automatic:	no
Required:	no
Blocked:	no

5.3.3.2 Structure

Character No.	Meaning	Hex-Value
1	STX (start of text)	\$02
2	status (internal clock status)	\$30-39, \$41-46
3	day of the week (1=Monday ... 7=Sunday) for UTC time bit 3 is set to 1 in the day of the week	\$31-37
4	tens hour	\$30-32
5	unit hour	\$30-39
6	tens minute	\$30-35
7	unit minute	\$30-39
8	tens second	\$30-36
9	unit second	\$30-39
10	tens day	\$30-33
11	unit day	\$30-39
12	tens month	\$30-31
13	unit month	\$30-39
14	thousandths year	\$31-32
15	hundreds year	\$30, \$39
16	tens year tens digit	\$30-39
17	unit year unit digit	\$30-39
18	LF (line feed)	\$0A
19	CR (carriage return)	\$0D
20	ETX (end of text)	\$03

5.3.3.3 Status

The second and the third ASCII-character contain the status and the day of the week. The status is decoded binary. Structure of these characters :

	b3	b2	b1	b0		Meaning
Status:	x	x	x	0		no announcement hour
	x	x	x	1		announcement (DST changeover)
	x	x	0	x		standard time
	x	x	1	x		daylight saving time (DST)
	0	0	x	x		time / date invalid
	0	1	x	x		crystal operation
	1	0	x	x		radio operation
	1	1	x	x		radio operation (high accuracy)
Day of the Week:	0	x	x	x		CEST / CET
	1	x	x	x		UTC - time
	x	0	0	1		Monday
	x	0	1	0		Tuesday
	x	0	1	1		Wednesday
	x	1	0	0		Thursday
	x	1	0	1		Friday
	x	1	1	0		Saturday
	x	1	1	1		Sunday

5.3.3.4 Example

(STX)E412345618072002(LF)(CR)(ETX)

- It is Thursday 18.07.2002 - 12:34:56 o'clock
- radio operation (high accuracy)
- daylight saving time
- no announcement of a changeover
- () - ASCII-control characters e.g. (STX)

5.3.4 hopf Master/Slave-String

The *hopf* Master/Slave-String can be used to synchronise slave systems with the time data of the master system up to an accuracy of $\pm 0.5\text{msec}$. It differs from the *hopf* DCF77 slave string in as much as the difference to the UTC time is included in the transmission.

The *hopf* Master/Slave-String transmits:

- the full time information (hour, minute, second)
- the date (day, month, year [2 digits])
- the difference time local to UTC (hour, minute)
- the day of the week
- and status information (announcement of DST changeover, announcement of a leap second and the status of reception of the Master/Slave-String source)

5.3.4.1 Specified Settings

Automatic:	no
Required:	<p>The following settings are required for the synchronisation of the <i>hopf</i> slave-systems:</p> <ul style="list-style-type: none"> • output every minute • output second forerun • ETX on the second change; selectable: data string at the beginning or at the end of the 59. second. • local time • 9600 baud, 8 bit, 1 stop bit, no parity <p>This setting guarantees the best control of the time basis in the slave systems.</p>
Blocked:	no

5.3.4.2 Structure

Character No.	Meaning	Hex-Value
1	STX (start of text)	\$02
2	status	\$30-39, \$41-46
3	day of the week	\$31-37
4	tens hour	\$30-32
5	unit hour	\$30-39
6	tens minute	\$30-35
7	unit minute	\$30-39
8	tens second	\$30-36
9	unit second	\$30-39
10	tens day	\$30-33
11	unit day	\$30-39
12	tens month	\$30-31
13	unit month	\$30-39
14	tens year	\$30-39
15	unit year	\$30-39
16	difference time tens hour / operational sign	\$30-31, \$38-39
17	difference time unit hour	\$30-39
18	difference time tens minutes	\$30-35
19	difference time unit minutes	\$30-39
20	LF (line feed)	\$0A
21	CR (carriage Return)	\$0D
22	ETX (end of text)	\$03

The difference time is transmitted in hours and minutes following the year. The transmission is done in BCD. The difference time may be up to $\pm 11.59\text{h}$.

The operational sign is shown as the highest bit in the hours.

logic **1** = local time before UTC

logic **0** = local time after UTC

Example:

Data String	Tens Difference Time Nibble	Difference Time
(STX)83123456030196 <u>0</u> 300(LF)(CR)(ETX)	<u>0000</u>	- 03:00h
(STX)83123456030196 <u>1</u> 100(LF)(CR)(ETX)	<u>0001</u>	- 11:00h
(STX)83123456030196 <u>8</u> 230(LF)(CR)(ETX)	<u>1000</u>	+ 02:30h
(STX)83123456030196 <u>9</u> 100(LF)(CR)(ETX)	<u>1001</u>	+ 11:00h

5.3.4.3 Status

	b3	b2	b1	b0		Meaning
Status:	x	x	x	0		no announcement hour
	x	x	x	1		announcement (DST changeover)
	x	x	0	x		standard time
	x	x	1	x		daylight saving time (DST)
	x	0	x	x		no announcement leap second
	x	1	x	x		announcement leap second
	0	x	x	x		crystal operation
	1	x	x	x		radio operation
Day of the Week:	0	0	0	1		Monday
	0	0	1	0		Tuesday
	0	0	1	1		Wednesday
	0	1	0	0		Thursday
	0	1	0	1		Friday
	0	1	1	0		Saturday
	0	1	1	1		Sunday

Status	Operating Mode	Time	DST changeover	Leap Second
0 = 0000	quartz	standard time	no announcement	no announcement
1 = 0001	quartz	standard time	announcement	no announcement
2 = 0010	quartz	DST	no announcement	no announcement
3 = 0011	quartz	DST	announcement	no announcement
4 = 0100	quartz	standard time	no announcement	announcement
5 = 0101	quartz	standard time	announcement	announcement
6 = 0110	quartz	DST	no announcement	announcement
7 = 0111	quartz	DST	announcement	announcement
8 = 1000	radio	standard time	no announcement	no announcement
9 = 1001	radio	standard time	announcement	no announcement
A = 1010	radio	DST	no announcement	no announcement
B = 1011	radio	DST	announcement	no announcement
C = 1100	radio	standard time	no announcement	announcement
D = 1101	radio	standard time	announcement	announcement
E = 1110	radio	DST	no announcement	announcement
F = 1111	radio	DST	announcement	announcement

DST = daylight saving time

5.3.4.4 Example

(STX)841234561807028230(LF)(CR)(ETX)

- It is Thursday 18.07.2002 - 12:34:56 o'clock
- radio operation
- standard time
- no announcement of a changeover
- The difference time to UTC is +2.30 h

5.3.5 SINEC H1

Below the data string SINEC H1 is described.

String request

The data string SINEC H1 can also send by request. The time of output will be set to "send only by request" and the string will be requested with the ASCII character "?".

5.3.5.1 Specified Settings

Automatic:	no
Required:	no
Blocked:	no

5.3.5.2 Structure

Character No.	Meaning	Hex-Value
1	STX (start of text)	\$02
2	"D" ASCII D	\$44
3	":" colon	\$3A
4	tens day	\$30-33
5	unit day	\$30-39
6	". ." point	\$2E
7	tens month	\$30-31
8	unit month	\$30-39
9	". ." point	\$2E
10	tens year	\$30-39
11	unit year	\$30-39
12	";;" semicolon	\$3B
13	"T" ASCII T	\$54
14	":" colon	\$3A
15	day of the week	\$31-37
16	";;" semicolon	\$3B
17	"U" ASCII U	\$55
18	":" colon	\$3A
19	tens hour	\$30-32
20	unit hour	\$30-39
21	". ." point	\$2E
22	tens minute	\$30-35
23	unit minutes	\$30-39
24	". ." point	\$2E
25	tens second	\$30-36
26	unit second	\$30-39
27	";;" semicolon	\$3B
28	"#" or space	\$23 / \$20
29	"**" or space	\$2A / \$20
30	"S" or space	\$53 / \$20
31	"!" or space	\$21 / \$20
32	ETX (end of text)	\$03

5.3.5.3 Status

The characters 28-31 in the data string SINEC H1 tell the synchronisation status of the clock.

The characters mean the following:

character no. 28 = "#" space	no radio synchronisation after reset, time invalid radio synchronisation after reset, clock in crystal operation
character no. 29 = "*" space	time from internal crystal in the clock time by radio reception
character no. 30 = "S" space	daylight saving time standard time
character no. 31 = "!" space	announcement of a DST or standard time changeover no announcement

5.3.5.4 Example

(STX)D:18.07.02;T:4;U:12.34.56; _ _ _ _ (ETX) (_) = Space

- It is Thursday 18.07.02 - 12:34:56 o'clock
- radio operation
- standard time
- no announcement of a changeover

5.3.6 T-String

Below the T-String is described.

The T-string can be transmitted in all modes (e.g. **forerun** or **last control characters on the second change**). The data string can be requested by "T".

5.3.6.1 Specified Settings

Automatic:	no
Required:	no
Blocked:	no

5.3.6.2 Structure

Character No.	Meaning	Hex-Value
1	"T" ASCII T	\$54
2	":" colon	\$3A
3	tens year	\$30-39
4	unit year	\$30-39
5	":" colon	\$3A
6	tens month	\$30-31
7	unit month	\$30-39
8	":" colon	\$3A
9	tens day	\$30-33
10	unit day	\$30-39
11	":" colon	\$3A
12	tens day of the week	\$30
13	unit day of the week	\$31-37
14	":" colon	\$3A
15	tens hour	\$30-32
16	unit hour	\$30-39
17	":" colon	\$3A
18	tens minute	\$30-35
19	unit minute	\$30-39
20	":" colon	\$3A
21	tens second	\$30-36
22	unit second	\$30-39
23	CR (carriage return)	\$0D
24	LF (line feed)	\$0A

5.3.6.3 Status

No status contained in the T-String.

5.3.6.4 Example

T:02:07:18:04:12:34:56(CR)(LF)

It is Thursday 18.07.02 - 12:34:56 o'clock

5.3.7 IBM Sysplex Timer Model 1+2

This protocol is used for the synchronization of an IBM 9037 Sysplex Timer. The IBM Sysplex Timer expects the time at its input every second.

While starting the Sysplex Timer the ASCII-sign "**C**" is sent to the connected radio controlled clock. The listed protocol in the table is automatically given out every second by that.

5.3.7.1 Specified Settings

Automatic:	The following parameters are activated after a reset : automatically <ul style="list-style-type: none"> • 9600 baud • 8 data bit • odd parity • 1 stop bit • sending on request without forerun and without control characters
Required:	no
Blocked:	no

The setting UTC or local time is optional.



The above parameters can be changed manually after activating. But after a reset or a system reboot the parameters will be overwritten with the above parameters again.

5.3.7.2 Structure

Character No.	Meaning	Hex-Value
1	SOH (start of header)	\$02
2	hundreds current day of the year	\$30-33
3	tens current year	\$30-39
4	unit current year	\$30-39
5	"%;" colon	\$3A
6	tens hour	\$30-32
7	unit hour	\$30-39
8	"%;" colon	\$3A
9	tens minute	\$30-35
10	unit minute	\$30-39
11	"%;" colon	\$3A
12	tens second	\$30-35
13	unit second	\$30-39
14	Quality Identifier	\$20, 41, 42, 43, 58
15	CR (carriage return)	\$0D
16	LF (line feed)	\$0A

5.3.7.3 Status

The 14th character ("Quality Identifier") informs about the synchronisation status of the clock. Possible values and their meaning are listed below.

"?"	=	question mark	=	no radio controlled time
" "	=	space	=	radio controlled time at hand
"A"	=	Hex 41	=	crystal operation for more than 20 minutes
"B"	=	Hex 42	=	crystal operation for more than 41 minutes
"C"	=	Hex 43	=	crystal operation for more than 416 minutes
"X"	=	Hex 58	=	crystal operation for more than 4160 minutes

5.3.7.4 Example

(SOH)050:12:34:56 _ (CR) (LF) (_) = Space

- It is 12:34:56 o'clock
- radio operation
- 50th day of the year

5.3.8 Data String ALOHA

The ALOHA data string refers to the data string IBM 9037 Sysplex Timer. All settings like transmission parameters and points of transmission can be set freely.

5.3.8.1 Specified Settings

Automatic:	no
Required:	no
Blocked:	Except for the following points all settings are possible: <ul style="list-style-type: none"> • CR and LF can't be swapped • the output of the last character (LF) is <u>not</u> possible at the second change

5.3.8.2 Structure

Character No.	Meaning	Hex-Value
1	SOH (start of header)	\$02
2	hundreds current day of the year	\$30-33
3	tens current year	\$30-39
4	unit current year	\$30-39
5	"%;" colon	\$3A
6	tens hour	\$30-32
7	unit hour	\$30-39
8	"%;" colon	\$3A
9	tens minute	\$30-35
10	unit minute	\$30-39
11	"%;" colon	\$3A
12	tens second	\$30-35
13	unit second	\$30-39
14	Quality Identifier	\$20, 41, 42, 43, 58
15	CR (carriage return)	\$0D
16	LF (line feed)	\$0A

5.3.8.3 Status

Character number 14 informs about the synchronisation status of the clock. Possible values and their meaning are listed below.

"?"	=	question mark	=	no radio controlled time
" "	=	space	=	radio controlled time at hand
"A"	=	Hex 41	=	crystal operation for more than 20 minutes
"B"	=	Hex 42	=	crystal operation for more than 41 minutes
"C"	=	Hex 43	=	crystal operation for more than 416 minutes
"X"	=	Hex 58	=	crystal operation for more than 4160 minutes

5.3.8.4 Example

(SOH)050:12:34:56 _ (CR) (LF) (_) = Space

- It is 12:34:56 o'clock
- radio operation
- 50th day of the year

5.3.9 SINEC H1 Extended

Below the data string SINEC H1 Extended is described.

String request

The data string SINEC H1 Extended can also send by request. The time of output will be set to "send only by request" and the string will be requested with the ASCII character "?".

5.3.9.1 Specified Settings

Automatic:	no
Required:	no
Blocked:	no

5.3.9.2 Structure

Character No.	Meaning	Hex-Value
1	STX (start of text)	\$02
2	"D" ASCII D	\$44
3	":" colon	\$3A
4	tens day	\$30-33
5	unit day	\$30-39
6	". ." point	\$2E
7	tens month	\$30-31
8	unit month	\$30-39
9	". ." point	\$2E
10	tens year	\$30-39
11	unit year	\$30-39
12	";;" semicolon	\$3B
13	"T" ASCII T	\$54
14	":" colon	\$3A
15	day of the week	\$31-37
16	";;" semicolon	\$3B
17	"U" ASCII U	\$55
18	":" colon	\$3A
19	tens hour	\$30-32
20	unit hour	\$30-39
21	". ." point	\$2E
22	tens minute	\$30-35
23	unit minutes	\$30-39
24	". ." point	\$2E
25	tens second	\$30-36
26	unit second	\$30-39
27	";;" semicolon	\$3B
28	"#" or space	\$23 / \$20
29	"**" or space	\$2A / \$20
30	"S", "U" or space	\$53 / \$55 / \$20
31	"!", "A" or space	\$21 / \$41 / \$20
32	ETX (end of text)	\$03

5.3.9.3 Status

The characters 28-31 in the data string SINEC H1 Extended tell the synchronisation status of the clock.

The characters mean the following:

character no. 28 = "#" space	no radio synchronisation after reset, time invalid radio synchronisation after reset, clock in crystal operation
character no. 29 = "*" space	time from internal crystal in the clock time by radio reception
character no. 30 = "S" "U" space	daylight saving time UTC (see chapter 5.1.2.1) standard time
character no. 31 = "!" "A" space	announcement of a DST or standard time changeover announcement of a leap second no announcement

5.3.9.4 Example

(STX)D:18.07.02;T:4;U:12.34.56; _ _ _ _ (ETX) (_) = Space

- It is Thursday 18.07.02 - 12:34:56 o'clock
- radio operation
- standard time
- no announcement of a changeover

5.3.10 NMEA - GPRMC

The full NMEA data string GPRMC contains the position-, rate- and time data (UTC) calculated by the GPS receiver. The different information is separated in the data string by a comma. Only a comma is set if an information is not available.

5.3.10.1 Specified Settings

The following settings must be done on the board:

Automatic:	no
Required:	<ul style="list-style-type: none">• baud rate = 4800 baud• word length = 8 bit• stop bit = 1• parity = no parity• transmission point = every second• forerun off• ETX immediately• transmission delay off• time base = UTC
Blocked:	no

5.3.10.2 Structure

Character No.	Meaning	Hex-Value
1	"\$" string start	\$24
2	"G" ASCII G	\$47
3	"P" ASCII P	\$50
4	"R" ASCII R	\$52
5	"M" ASCII M	\$4D
6	"C" ASCII C	\$43
7	"," comma	\$2C
8	tens hour	\$30-32
9	unit hour	\$30-39
10	tens minute	\$30-35
11	unit minute	\$30-39
12	tens second	\$30-35
13	unit second	\$30-39
14	". " point as separation	\$2E
15	tenth second	\$30-39
16	hundredth second	\$30-39
17	"," comma as separation	\$2C
18	"A" ASCII A	\$41
19	"," comma	\$2C
20	"," comma	\$2C
21	"," comma	\$2C
22	"," comma	\$2C
23	"," comma	\$2C
24	"," comma	\$2C
25	"," comma	\$2C
26	tens day	\$30-33
27	unit day	\$30-39
28	tens month	\$30-31
29	unit month	\$30-39
30	tens year	\$30-39
31	unit year	\$30-39
32	"," comma	\$2C
33	"," comma	\$2C
34	"**" string limitation	\$2A
35	tens checksum	\$30-39
36	unit checksum	\$30-39
37	CR (carriage return)	\$0D
38	LF (line feed)	\$0A

The checksum will be calculated from the XOR function of all transmitted ASCII characters between \$ and *.

All information will be transmitted as ASCII characters.

5.3.10.3 Status

No status contained in data string NMEA GPRMC.

5.3.10.4 Example

\$GPRMC,101640.00,A,,,,,,150904,*03 <CR><LF>

- It is the 15.09.2004
- 10:16:40 o'clock and 00 hundredth seconds
- checksum 03

5.3.11 SAT 1703 Time String

All modes can be transmitted with the SAT 1703 Time String (e.g. with forerun or end character at second change).

The SAT 1703 Time String can also be sent on request. The point of transmission will be set to "transmission on request". The SAT 1703 Time String can be requested with ASCII-character "?".

5.3.11.1 Specified Settings

Automatic:	no
Required:	no
Blocked:	no

5.3.11.2 Structure

Character No.	Meaning	Hex-Value
1	STX (start of text)	\$02
2	tens day	\$30-33
3	unit day	\$30-39
4	"."	\$2E
5	tens month	\$30-31
6	unit month	\$30-39
7	"."	\$2E
8	tens year	\$30-39
9	unit year	\$30-39
10	"/"	\$2F
11	unit day of the week	\$31-37
12	"/"	\$2F
13	tens hours	\$30-32
14	unit hours	\$30-39
15	\$3A	
16	tens minutes	\$30-35
17	unit minutes	\$30-39
18	\$3A	
19	tens seconds	\$30-35
20	unit seconds	\$30-39
21	"M" or "M" or "U"	\$4D, \$4D, \$55
22	"E" or "E" or "T"	\$45, \$45, \$54
23	"Z" or "S" or "C"	\$5A, \$53, \$43
24	" " or "Z" or " "	\$20, \$5A, \$20
25	" " (\$20 \Rightarrow synchronous) or "**" (\$2A \Rightarrow not synchronous)	\$20 \$2A
26	" " (\$20 \Rightarrow no announcement) or "!" (\$21 \Rightarrow announcement of a DST or standard time changeover)	\$20 \$21
27	CR (carriage return)	\$0D
28	LF (line feed)	\$0A
29	ETX	\$03

5.3.11.3 Status

The characters 21-26 in the SAT 1703 Time String indicate the synchronisation status of the clock.

The characters mean the following:

Character no. 21-24 =	"MESZ"	Central European Summertime (Daylight Saving Time)
	"MEZ"	Central European Time (Standard Time / Wintertime)
	"UTC"	Coordinated Universal Time
Character no. 25 =	"*" " " (space)	time from internal crystal in the clock time by radio reception
Character no. 26 =	"!" space	announcement of a DST or standard time changeover no announcement

5.3.11.4 Example

(STX)18.07.02/4/02:34:45UTC_ _ _ (CR)(LF)(ETX)

- It is Thursday 18.07.02 - 02:34:45 o'clock UTC
- time synchronisation by GPS

5.3.12 NMEA 0183 - GPZDA (V3.00)

The datagram expresses the time information in NMEA format¹ 0183. The structure matches the standard string ZDA Time & Date.

The below transmitted data string contains only the time information in UTC and the position in the following format:

\$GPZDA, hhmmss, DD, MM, YYYY, hhh, mm*CC<CR><LF>

All information are transmitted between the ASCII characters "\$" and "*", followed by two characters for the checksum (EXOR calculated characters between "\$" and "*"). The hexadeciml values of the upper and lower 4 bits of the checksum are transferred into ASCII characters. The binary values A-F are transferred to the ASCII characters "A"-“F” (41h - 46h).

All information are transmitted as ASCII characters with 8 bit word length, 1 stop bit and no parity.

The structure of string contains the following information:

Information:	Format:	Description:
Time Base	GP	Time Base=GPS
String Identifier	ZDA	String for Time & Date
Time	hhmmss	Hours, Minutes, Seconds
Date	DD,MM,YYYY	Day, Month, Year (4 digits)
Local Time	hhh,mm	Hours with pre-sign, Minutes

5.3.12.1 Specified Settings

Automatic:	no
Required:	<ul style="list-style-type: none"> • baud rate = 4800 baud • word length = 8 bit • stop bit = 1 • parity = no parity • transmission point = every second • second forerun off • control character at second change off • transmission delay off • time base = UTC
Blocked:	no

¹ NMEA = National Marine Electronics Association

5.3.12.2 Structure

Character No.	Meaning	Hex-Value
1	"\$" string start	\$24
2	"G" identifier time basis GPS	\$47
3	"P"	\$50
4	"Z" identifier time information data	\$52
5	"D"	\$4D
6	"A"	\$43
7	"," comma as separation	\$2C
8	tens hour (UTC)	\$30-32
9	unit hour (UTC)	\$30-39
10	tens minute (UTC)	\$30-35
11	unit minute (UTC)	\$30-39
12	tens second (UTC)	\$30-35
13	unit second (UTC)	\$30-39
14	".," comma as separation	\$2C
15	tens day (UTC)	\$30-33
16	unit day (UTC)	\$30-39
17	".," comma as separation	\$2C
18	tens month (UTC)	\$30-31
19	unit month (UTC)	\$30-39
20	".," comma as separation	\$2C
21	thousands digit year (UTC)	\$31-32
22	hundreds digit year (UTC)	\$30, \$39
23	tens year (UTC)	\$30-39
24	unit year (UTC)	\$30-39
25	"," comma as separation	\$2C
26	"+" or "-" sign local time zone	\$2B, \$2D
27	tens hour (local time zone diff.)	\$30-32
28	unit hour (local time zone diff.)	\$30-39
29	"," comma as separation	\$2C
30	tens minute (local time zone diff.)	\$30-35
31	unit minute (local time zone diff.)	\$30-39
32	"**" string limitation	\$2A
33	checksum bit 7-4	\$30-39, \$41-46
34	checksum bit 3-0	\$30-39, \$41-46
35	CR (carriage return)	\$0D
36	LF (line feed)	\$0A

5.3.12.3 Example

\$GPZDA,123456,26,09,2003,-02,00*6C(CR)(LF)

- Output UTC time
- It is Friday 26 September 2003 - 12:34:56h (UTC)
- Difference Time -2 hours (2 hours east)
=> Local Time 14:34:56h

Examples of data strings before, during and after the changeover:

Changeover summer time->winter time (in October 2009/ MEZ time zone)

```
$GPZDA,005957,25,10,2009,-02,00*64<br><lf>
$GPZDA,005958,25,10,2009,-02,00*6B<br><lf>
$GPZDA,005959,25,10,2009,-02,00*6A<br><lf>
$GPZDA,010000,25,10,2009,-01,00*68<br><lf>
$GPZDA,010001,25,10,2009,-01,00*69<br><lf>
$GPZDA,010002,25,10,2009,-01,00*6A<br><lf>
```

Examples of data strings before, during and after inserting of any leap-second:

Leap-second turn of the year 2009->2010 (MEZ time zone)

```
$GPZDA,235958,31,12,2009,-01,00*6E<br><lf>
$GPZDA,235959,31,12,2009,-01,00*6F<br><lf>
$GPZDA,235960,31,12,2009,-01,00*65<br><lf>
$GPZDA,000000,01,01,2010,-01,00*67<br><lf>
$GPZDA,000001,01,01,2010,-01,00*66<br><lf>
$GPZDA,000002,01,01,2010,-01,00*65<br><lf>
```

Examples of data strings before, during and after the changeover:

Changeover summer time->winter time (in March 2009/ MEZ time zone)

```
$GPZDA,005957,29,03,2009,-01,00*69<br><lf>
$GPZDA,005958,29,03,2009,-01,00*66<br><lf>
$GPZDA,005959,29,03,2009,-01,00*67<br><lf>
$GPZDA,010000,29,03,2009,-02,00*65<br><lf>
$GPZDA,010001,29,03,2009,-02,00*64<br><lf>
$GPZDA,010002,29,03,2009,-02,00*67<br><lf>
```

5.3.13 GPS2000 Data String

With the GPS2000 data string systems can be synchronized to an accuracy of $\pm 1 \mu\text{sec}$ with the time data of the master system.

5.3.13.1 Specified Settings

Automatic:	no
Required:	<ul style="list-style-type: none"> • 9600 Baud, 8 bit, 1 stop bit, even parity • Output every second • Control characters: standard (direct, without delay) • Time basis and second forerun as required • Transmission time: every second • CR -> LF
Blocked:	no



To obtain the above accuracy, it is also necessary to evaluate a second pulse.

5.3.13.2 Structure

Character No.	Meaning	Hex-Value
1	Soh (start of header)	\$01
2	hundreds day in the year	\$30-33
3	tens day in the year	\$30-39
4	unit day in the year	\$30-39
5	: (colon)	\$3A
6	tens hours	\$30-39
7	unit hours	\$30-36
8	: (colon)	\$3A
9	tens minutes	\$30-33
10	unit minutes	\$30-39
11	: (colon)	\$3A
12	tens seconds	\$30-39
13	unit seconds	\$30-39
14	time accuracy	\$3F, \$23, \$2A, \$2E, \$20
15	CR (carriage return)	\$0D
16	LF (line feed)	\$0A

5.3.13.3 Status

Time Accuracy in the GPS2000 Data String

Hex-value	ASCII-value	Description	Meaning, details of accuracy
\$3F	?	question mark	Error greater than 1 msec
\$23	#	double dagger	Error greater than 100 µsec
\$2A	*	star	Error greater than 10 µsec
\$2E	.	point	Error greater than 1 µsec
\$20		space	Error greater than 1 µsec

5.3.13.4 Example

(SOH)042:12:34:56*(CR)(LF)

- It is day of the year 42,
- 12:34:56 o'clock,
- the system time inaccuracy is greater than 10 µsec.

5.3.14 IEC-103 (ASDU Type 6)

Reference: IEC60870-5-103



This data string requires the configuration of **Mode Byte 3** (see **Chapter 5.3.14.4 Initialization String for IEC-103 (ASDU Type 6)**).

5.3.14.1 Specified Settings

Automatic:	no
Required:	<ul style="list-style-type: none"> • baud rate: 9600 Baud • word length = 8 bit • stop bit: 1 • parity:= even • transmission point = every minute • control character at second change: off • second forerun: off • transmission delay: off <p>Mode byte 3 (address): 0 to 255 (\$00-FF)</p>
Blocked:	<ul style="list-style-type: none"> • word length: 8 bit • transmission point = every minute • control character at second change: off • second forerun: off • transmission delay: off

5.3.14.2 Structure

Character No.	Meaning	Hex-Value
1	Start flag	\$68
2	Length of Information	\$0F
3	Repeated length of Information	\$0F
4	Start flag	\$68
5	Control field	\$44
6	Station address	\$FF
7	Frame Type identification	\$06
8	Variable structure identifier	\$81
9	Cause of transmission	\$08
10	Common address of ASDU	\$FF
11	Function type	\$FF
12	Information number	\$00
13	Milliseconds (Low octet)	\$0000-EA5F
14	Milliseconds (High octet)	\$0000-EA5F
15	Minutes (0..59) + MSB = Invalid Flag	\$00-3B, \$80-BB
16	Hours (0..23) + MSB = SU Summer time Flag	\$00-17, \$80-97
17	Days (1-31)	\$01-1B
18	Months (1-12)	\$01-0C
19	Years (00..99)	\$00-63
20	Checksum (sum of fields 5 to 19 mod 256)	\$00-FF
21	End flag	\$16

MSB of minute: 1 = clock is not synchronous (time invalid or quartz)
 0 = clock is synchronous

MSB of hour: 1 = daylight saving time
 0 = standard time

The seconds are displayed in the value of the milliseconds.

Thus the millisecond value runs from 0 .. 59999 decimal or from 0000 .. EA5F hexadecimal.
 (If output is set to the minute change this value is always 0)

The checksum is the sum of byte 5 to 19 Modulo 256.

5.3.14.3 Example

The length of the data string is fixed to 21 characters. All characters including special characters are allowed. Only binaurally values are transmitted.

The transmitted values are given out hexadecimal.::

<68><0f><0f><68><44><ff><06><81><08><ff><ff><00><00><00><00><05><08><11><87><09><fe><16>

- Time is 08:05:00.000 at 17th July 2009
- daylight saving time
- The clock is synchronous.

5.3.14.4 Initialization String for IEC-103 (ASDU Type 6)

This string is sent with ascending IEC address every second unless the minute change. The IEC address is continuously repeated from 1 to a selectable value of maximal 255 (\$00-FF). Setting up the IEC address is done in **mode byte 3**.



Setting the IEC address to "0" **disables** the initialization string.

Mode Byte 3 for Initialization String IEC-103

B7	B6	B5	B4	B3	B2	B1	B0	DEC	HEX	Note
0	0	0	0	0	0	0	0	0	\$00	Initialization deactivated
0	0	0	0	0	0	0	1	1	\$01	
0	0	0	0	0	0	1	0	2	\$02	
0	0	0	0	0	0	1	1	3	\$03	
:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:		
0	0	0	0	1	1	1	1	15	\$0F	
0	0	0	1	0	0	0	0	16	\$10	
0	0	0	1	0	0	0	1	17	\$11	
:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:		
1	1	1	1	1	1	0	0	252	\$FC	
1	1	1	1	1	1	0	1	253	\$FD	
1	1	1	1	1	1	1	0	254	\$FE	
1	1	1	1	1	1	1	1	255	\$FF	Maximum Value

Structure IEC-103

Character no.	Meaning	Hex Value
1	Start flag	10
2	Control field	47
3	IEC-Address	00-FF
4	Checksum (sum of fields 2 & 3 mod 256)	00-FF
5	End flag	16

Example

The length of data string consists of 5 characters. Just binary values are sent.

The hexadecimal values of the transmitted characters are stated:

```
<10><47><01><48><<16>           (String initializes unit with the address 01)
<10><47><02><49><<16>
:
<10><47><0F><56><<16>
<10><47><10><57><<16>
:
<10><47><FE><45><<16>
<10><47><FF><46><<16>           (String with maximal valid address)
```

5.3.15 ABB-SPA Seconds-Clock

The ABB-SPA data string consists of two different data strings: The Time/Date String and the Second Data String. The Time/Date String fades over the seconds data string when the output time is the same.

In case of the setting "without checksum" the ASCII characters for XX are transmitted instead of the checksum. The putout milliseconds state the (calculated) transmission time of the last character of the string.



This data string requires the configuration of **Mode Byte 3**.

5.3.15.1 Specified Settings

Settings mode byte 3 for data string ABB SPA

B7	free
x	without function at present
B6	free
x	without function at present

B5	separator between day and hour in time/date string)
0	space (\$20)
1	dot (\$2E)

B4	checksum
0	without checksum (appropriate position filled with "XX")
1	with checksum

B3	B2	output point of time time/date string
0	0	6 a.m. and 6 p.m.
0	1	every hour
1	0	every 30 minutes
1	1	every minute

B1	B0	output point of time second string
0	0	every second
0	1	every 10 seconds
1	0	every 30 seconds
1	1	every minute

5.3.15.2 Structure

5.3.15.2.1 Date and Time String

Character No.	Meaning	Hex-Value
1	">" ASCII character >	\$3E
2	"9" ASCII character 9	\$39
3	"0" ASCII character 0	\$30
4	"0" ASCII character 0	\$30
5	"W" ASCII character W	\$57
6	"D" ASCII character D	\$54
7	"%;" colon	\$3A
8	tens year	\$30-39
9	unit year	\$30-39
10	"-" minus	\$2D
11	tens month	\$30-31
12	unit month	\$30-39
13	"-" minus	\$2D
14	tens day	\$30-33
15	unit day	\$30-39
16	".;" dot	\$2E
17	tens hour	\$30-32
18	unit hour	\$30-39
19	".;" dot	\$2E
20	tens minute	\$30-35
21	unit minute	\$30-39
22	";;" semicolon	\$3B
23	tens second	\$30-36
24	unit second	\$30-39
25	".;" dot	\$2E
26	1/10 second	\$30-39
27	1/100 second	\$30-39
28	1/1000 second	\$30-39
29	"%;" colon	\$3A
30	checksum (high nibble)	\$30-3F, \$58
31	checksum (low nibble)	\$30-3F, \$58
32	CR (carriage return)	\$0D

5.3.15.2.2 Second String

Character No.	Meaning	Hex-Value
1	">" ASCII-character >	\$3E
2	"9" ASCII-character 9	\$39
3	"0" ASCII-character 0	\$30
4	"0" ASCII-character 0	\$30
5	"W" ASCII-character W	\$57
6	"T" ASCII-character T	\$54
7	\$3A	
8	tens second	\$30-36
9	unit second	\$30-39
10	". " dot	\$2E
11	1/10 second	\$30-39
12	1/100 second	\$30-39
13	1/1000 second	\$30-39
14	\$3A	
15	checksum (high nibble)	\$30-3F, \$58
16	checksum (low nibble)	\$30-3F, \$58
17	CR (carriage return)	\$0D

5.3.15.3 Status

No status contained in data string ABB-SPA.

5.3.15.4 Examples

5.3.15.4.1 Date and Time String

Output with dot between day and second is set.

>900WD:04-12-07.14.27;00.035:37(CR)

- Date: 07.12.2004
- Time: 14:27:00 o'clock, 35 milliseconds
- checksum: 37

5.3.15.4.2 Second String

>900WT:02.019:10(CR)

- 2 seconds, 19 milliseconds

6 6844RC - Functionality

This Chapter describes the additional functions of System 6844RC compared to standard System 6844.



Subsequent activation of the RC functionality is **not** possible in the field.

System 6844RC is designed for use in conjunction with management systems.

The System can be configured via serial interface and monitored in a network environment by using a LAN Management Board / Module 6844MNG (SNMP/SYSLOG/e-mail notification) and configured via the *hopf* Management Console (*hmc*).

In the 6844RC version, four additional high-precision, programmable internal pulses are available, which can be configured exclusively via the *hopf* Management Console (*hmc*).

The serial connection is made via interface COM0. Optionally, a separate remote interface can also be integrated into the System so that both interfaces COM0 and COM1 are exclusively available for customer applications.

Additional Configuration Channels

In addition to the keyboard, System 6844RC offers other options to configure the System:

- *hopf* Management Console (*hmc*) via serial interface via COM0
- *hopf* Management Console (*hmc*) over the network via LAN Management Board / Module 6844MNG (option)
- Over the network via WebGUI of the LAN Management Board / Module (option)

Additional Menu Items on the LCD-Display

The following additional menu items are available on System 6844RC:

- Activation of the LAN Management Board / Module in System 6844RC
- Set network parameter (SET) and show the LAN Management Board / Module (SHOW)


Additional Hardware

The following additional hardware is available in System 6844RC:

- 4 additional high-precision, programmable pulses
- LAN Management Board / Module
- Prepared slot for a LAN Management Board (option) - (not for 1U)
- Prepared slot for a LAN Management Board with a separate remote RS232 interface for connection to a PC (option) - (not for 1U)

6.1 LAN Management Module 6844MNG for 1U System

The LAN Management Module is connected to Control Board 6844RC as an integrated component of the System. An later build-in or replacement by the customer is not possible.




Subsequent installation of the LAN Management Module is not possible in the field.

6.2 LAN Management Board 6844MNG for 3U / Table / Wall Systems

The LAN Management Board is installed as a Function Board with a defined slot in the System-Bus of Control Board 6844RC.



The LAN Management Board subsequently can only be installed in a slot in the System prepared for this purpose (6844MNG/prepared slot).

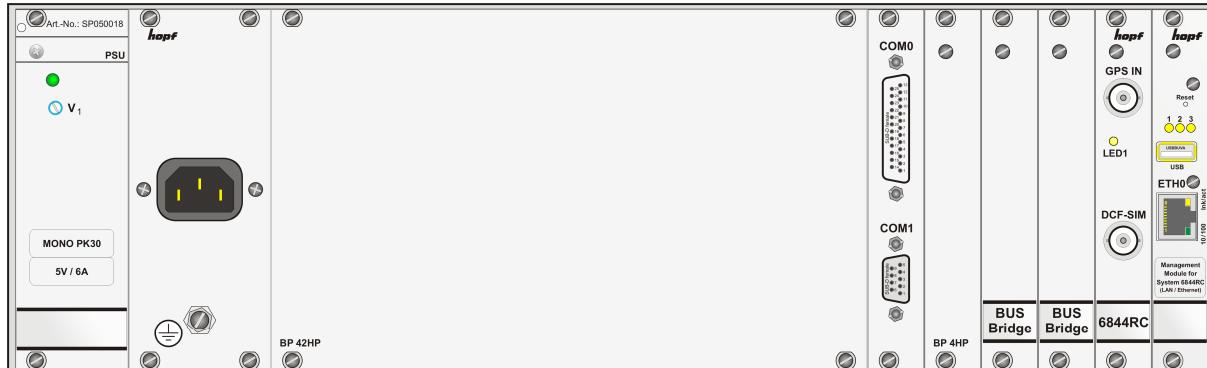

7 Function Boards

These Function Boards are Euro-boards that were designed for integration in 19" Systems. All boards are connected to the System via a VG ledge (DIN41612). The boards receive their power supply and the required data or signals via these VG ledges.

The front panels of the Boards are designed as standard for 3U/19" Systems or they can be used with an adapted panel on the 1U Slim Line System.

Basically this Function Board is available in two types:

- **Function Boards for System-Bus**

These Boards can only operate on a System-Bus. However, account must be taken of board-specific restrictions.

- **Function Boards**

These Boards can operate with or without a System-Bus.

There are some points that must be considered when dealing with Function Boards:

Electrical Properties



The System and Function Boards do **not** support **hot plug** capability.

If it is necessary to exchange a board the System **must** be switched off first. Otherwise the System or Function Board could be damaged.

Power Supply

All Function Boards are powered by the operating voltage via the internal System-Bus or via system internal connections.

Mechanics

Function Boards with suitable front panels are required for installation in 1U-Systems and 3U-Systems.

Configuration

In principle there are two board types:

- Boards which are configured via DIP switches and jumpers only (the board must be configured prior to installation)
- Boards which are configured via the System 6844(RC) menu (and DIP switches or jumpers), (the base configuration of the board must be set prior to installation; the other settings are then carried out via the System 6844(RC) menu).

Factory Pre-wired Slots

In addition, some Function Boards require system-internal wiring in order to achieve the desired functionality. Where boards are to be delivered with this wiring integrated into the System the wiring is carried out in the factory.



The details of slots which are wired at the time of delivery can be found in the System drawing / specifications.

7.1 Function Boards for System-Bus

These Boards have their own onboard microcontroller and can only be used in conjunction with a System-Bus and Control Board. These Boards communicate with the Control Board over the internal System-Bus. The Control Board simultaneously monitors the Function Boards for errors. Due to the onboard microcontroller, these Boards have high performance resources that allow them to compute time-critical operations in real-time and transmit the time information highly accurately.

7.2 Function Boards

These are mostly simple output boards without their own "intelligence". Usually they receive the information to be transmitted from any desired signal source. These Boards do not necessarily need a System-Bus. However, most of these Boards can pick up the information available on the System-Bus (PPS pulse, DCF77 pulse (1 Hz)) and transmit this in a hardware format specific to the Board.

7.3 Function Boards Summary

In principle all the Function Boards presented here can be retrofitted by the customer, provided that suitable slots are available in the System. However, for certain functionalities some boards require system-internal wiring.

The following summary describes the Function Boards that are currently available and the customer retrofit information:

Function Boards for System-Bus (max. 2 Boards per System possible)	
• 7271/7272	LAN Board for NTP/SINEC H1 LAN BUS - Suitable for retrofit
• 7265	IRIG-B Output Board - Suitable for retrofit
• 7266	IRIG-B Output Board - Suitable for retrofit
• 7406	Slave Clock Board - limited suitability for retrofit (external line voltage feed required)
• 7530	Frequency Output Board - Suitable for retrofit (max. 1 Board per System)
• 7112	Optical Coupler Board for Pulse Output - Suitable for retrofit
• 7121	Relay Board for Pulse Output - Suitable for retrofit



To expand 6844(RC) Systems with **Function Boards for System-Bus**, a slot with Bus-Bridge Boards must be available for each Board.

Function Boards

- **7318** DCF77 Antenna Distributor
 - Suitable for retrofit
- **7248** FO Converter F-ST
 - limited suitability for retrofit
(for PPS and DCF77 pulse output only (1Hz))
- **7170** Optical Coupler Board
 - limited suitability for retrofit
(for PPS and DCF77 pulse output only (1Hz))
- **6841H1** Converter Board to TTL, **on enquiry**
- **6841H2** Converter Board to FO-plastic **on enquiry**



To expand with **Function Boards**, a slot with Bus-Bridge Board or suitably prepared slot must be available for each Board.



The list of available Function Boards is continuously being increased.
If you require a function that is not covered by the Function Boards listed
please ask us!

7.4 Exchanging a Function Board

To exchange a Function Board for an identical board model whilst retaining all previous functions requires the following steps:

- Switch the equipment off
- Remove all connections to the Function Board to be exchanged
- Unscrew the Function Board and pull it out of the System
- Transfer all DIP and jumper settings from the old Function Board to the new board
- Insert the new Function Board into the System and tighten the screws
- Remake all connections
- Switch the equipment back on
- Set Function Board to the desired configuration via the System 6844(RC) menu if necessary



Software settings must **always** be set after replacing a function board by using the menu in order that the new function board takes over the parameters. Otherwise the parameters of the old board will be displayed but the new board doesn't take over the new one.

7.5 Installation of an Additional Function Board

In principle every Function Board can be installed at any desired point on the System 6844(RC).

Exceptions:

- Slave Line Board 7406 with any internal line voltage wiring.
If the System is not prepared for the Board 7406 in the factory then the required line voltage must be made available for the Board 7406 externally.
- Function Boards with any system-internal wiring.



The details of slots which are wired at the time of delivery can be found in the System drawing / specifications.



To expand 6844(RC) Systems with **Function Boards for System-Bus**, a slot with Bus-Bridge Boards must be available for each Board.



To expand with **Function Boards**, a slot with Bus-Bridge Board or suitably prepared slot must be available for each Board.

A slot with a Bus Bridge Board must be available.

- Switch the equipment off.
- Unscrew the Bus Bridge Board (or blind panel) and pull it out of the System.
- Set all DIP and jumper settings for the desired functions on the Function Board.
- Insert the new Function Board into the System and tighten the screws.
- Make all connections to the Function Board.
- Switch the equipment back on.
- Configure the Function Board via the System 6844(RC) menu as necessary.

7.6 Removing Function Boards

The following steps are required in order to remove a Function Board from the System:

- Switch the equipment off.
- Isolate all connections to the Function Board to be removed.
- Unscrew the Function Board and pull it out of the System.
- Insert the Bus Bridge Board (or blind panel) into the System and tighten the screws.
- Switch the equipment back on.



A removed **Function Board with System-Bus** **must** be replaced by a Bus Bridge Board in order to guarantee the operation of the System.

8 System Indicators / Fault Analysis / Troubleshooting

The System 6844(RC) provides a variety of indicators for presenting the System status and for problem analysis. This status information can also be used for monitoring the clock system by means of a supervisory management system.

The System 6844(RC) monitors itself and the installed Function Boards for System-Bus for faults. These may be, for example, reception failures or Function Board errors.

Faults that arise are displayed or transmitted via various elements.

8.1 Status and Fault Indicators

The System status und faults arising can be identified with the aid of the following elements:

8.1.1 Status LEDs

The 1U System has Status LEDs on both the front and rear sides (see **Chapter 1.2.3.4 Status LEDs**).

8.1.1.1 "Power ON" LED (1U Systems only)

The "Power ON" LED lights up as soon as the System is provided with power and switched on. This LED goes out if the operating voltage fails, the System is switched off or the power supply unit is faulty.

8.1.1.2 "Sync. Status" LEDs (1U Systems only)

The "Sync." LED lights up as soon as the System attains "Sync" status (r, R on the display). A change from ON (green) to OFF (red) signals the loss of synchronization. The action of the LEDs can be influenced by the "SyncOFF Timer" setting (see **Chapter 4.3.6 SyncOFF Timer – Delayed Change of Sync. Status**).

8.1.1.3 LED Power Supply Unit (not for 1U)

The standard power supply unit has an LED that lights up as soon as power is available to the power supply unit (except 1U).

8.1.2 LCD-Display

A variety of status information can be read and fault analysis carried out with the aid of the LCD-Display.

8.1.2.1 System Status on the Display

The synchronization status can be read directly on the display (see **Chapter 3.3.2 Standard Display with Valid Time**).

8.1.2.2 Number of Satellites

An analysis of reception can be carried out with the display of satellite values. It can be seen whether the GPS receiver is receiving satellites and, if so, their reception values (see **Chapter 4.3.1 Satellite Values (GPS)**).

8.1.2.3 Position Display

Depending on the position entered manually by the user, it can be identified from the position display whether the GPS receiver calculated the position correctly and was / is therefore synchronous.

The last two digits of the item on manual entry are always 00. After synchronization of the clock system, 00 should no longer be displayed on at least one of the two lines; rather, the complete position as computed by the GPS receiver should be displayed.

8.1.2.4 SyncOFF Timer

The SyncOFF timer display shows whether the timer is running (the System outwardly displays status "r" but is no longer synchronized by the synchronization source).

It is also possible to read whether the timer has expired or was not yet activated.

8.1.2.5 Display of ERROR Byte

Internal System errors or other problems can be identified during a faulty synchronization by means of the Error Byte (see **Chapter 4.3.2 ERROR Byte**).



If at least one bit in the ERROR byte is active, an "E" is displayed on the bottom right of the display and the backlight flashes while the standard display is in the 1Hz pulse.

8.1.3 Error Relays (1U Systems only - Optional for 3U / Table-Top / Wall)

There is a SUB-D connector with two relay outputs for the status output on the rear side of the System (see **Chapter 2.2.7 Error Relays Connection**).

8.1.3.1 "Power" Relay

The "Power" error relay is activated as soon as the System is supplied with the operating voltage. This relay drops out if

- the operating voltage fails,
- the System is switched off or
- the power supply unit is faulty.

8.1.3.2 "Sync" Relay

The "Sync" error relay is activated as soon as the System reaches "Sync" status (r, R on the display). A fall-off signals the loss of synchronization. The action of the relay can be influenced by the "SyncOFF Timer" setting (see **Chapter 4.3.6 SyncOFF Timer – Delayed Change of Sync. Status**).

8.1.4 Send LED



Only Boards for the System-Bus have Send LEDs (see ***Chapter 7 Function Boards***)

Function Boards without a Send LED

Function Boards without a Send LED are supplied with the appropriate time information such as DCF77 pulse and PPS directly from the Control Board. The output of serial strings is also possible for this board type (additional system-internal wiring is required).

Function Boards with a Send LED

Function Boards with a Send LED have their own processor. They are provided with information via the System-Bus. These boards can prepare this time information and output it in the respective board-specific form.

8.1.5 Auto-Reset Logic (System-Bus)

The System has circular auto-reset logic. This means that each board inserted into the System-Bus (System-Bus boards only) is integrated into a reset circuit. In the event that:

- a board is removed from the System
- a board is defective
- a Function Board is in an undefined condition (program malfunction)

then this is recognized by the Control Board 6844(RC) and the System triggers a system-wide hardware-reset.

Bus-Bridge Boards installed in the factory are integrated into the auto-reset circuit and can be replaced by suitable Function Boards without system-internal modifications.

Auto-Reset Logic Operating Principle

There is a watch-dog module on the Control Board 6844(RC). An output signal transmitted from the Control Board to the System-Bus must be fed back to this module; otherwise a cyclical hardware-reset is triggered on the System-Bus.

This signal is forwarded from one Function Board to the next Function Board on the System-Bus. The signal is fed back to the Control Board from the last board via a bus termination.

In the event that a fault (e.g. program malfunction) arises on a board or the auto-reset circuit is broken (board was removed from the System), then the signal is no longer forwarded by this board and the Control Board triggers a system-wide hardware-reset via the System-Bus. After this all boards perform a defined program restart.

All boards with their own processor are actively integrated into the System's auto-reset logic. On boards without a processor the circulating signal is bridged and by this means the pulse is forwarded directly to the next board.

8.1.6 Serial Output of Data Telegrams

Many serial data telegrams contain status information that also contains the synchronization status of the System.

The status of the clock system can be ascertained in a connected System by means of this status (see **Chapter 5.3 Data Strings**).



Systems 6844 without remote interface enables the recording of these data telegrams (e.g. via "hyper terminal") a long-term analysis of the reception status.

8.1.7 RC Functionality (6844RC Systems only)

With RC functionality, further options are available for error analysis and monitoring.

Additional Channels for Status Information

- *hmc* Management Console via serial interface via COM0
The different System statuses can be displayed and reception records performed here.
- *hmc* Management Console over the network via LAN Management Board/Module 6844MNG (option)
The different System statuses can be displayed and reception records performed here.
- Over the network via WebGUI of the LAN Management Board/Module (option)
The different System statuses can be displayed here.

8.2 Error Patterns

This Chapter describes various error patterns which enable the customer to make a preliminary problem analysis. In addition they provide an indication about how to describe the error when contacting *hopf* Support.



Basically, for an initial error analysis in each problem case, if possible, the ERROR byte should be checked.



If an active ERROR byte is present, the backlight on the LCD display FLASHES in the 1Hz pulse.

8.2.1 Complete Failure

Description

- The "Power" / power supply LED is off
- "Power" error relay has tripped (1U Systems only)
- Display not active

Cause / Problem Solution

- Equipment is switched off
- Power supply failure
- Power supply unit defective

8.2.2 "Power" / Power Supply LED "ON" - No Display and No Output

Description

- The "Power" / power supply LED lit
- Display not active
- The complete System is not functioning

Cause / Problem Solution

- The Control Board is faulty
- The voltage provided by the power supply unit is too low
 - ⇒ The external power supply is too low
 - ⇒ The power supply unit is set incorrectly / faulty

8.2.3 Power LED "ON" – No Display but Valid Signal Output

Description

- The "Power" / power supply LED lit
- Display not active or shows only dark bars
- Send LEDs of all function boards for System-Bus light up cyclically
- Data Strings are available on the serial interfaces

Cause / Problem Solution

- The display is faulty
- The connection cable between the Control Board and the display is not plugged in correctly or is faulty

8.2.4 Power LED "ON" – Cyclical Flickering of the Displays

Description

- The "Power" / power supply LED lit
- The System start frame appears on the display for a short time and then resets permanently
- Function Boards start up for a short period

Cause

- System running in auto-reset

Problem Solution

- There is a board missing in one of the function board slots for the System-Bus
- A function board for the System-Bus that is integrated into the System is faulty

8.2.5 No GPS Reception / No Synchronization

Description

- System Status "C" is on the display
- The red Sync.-Status OFF LED lights (1U Systems only)
- "Sync" error relay has tripped (1U Systems only)
- Quartz status is transmitted in the serial strings

Cause / Problem Solution

- System was not initialized correctly / completely
- Check for errors in the Error Byte (see **Chapter 4.3.2 ERROR Byte**)

The following describes various effects and their possible causes on a non-synchronizing system:

Case 1:

Effect: After the first installation, no satellite appears on the display after several hours and **00** is displayed under **V**.

Possible errors:

- The antenna cable is too long
- An incorrect cable type was used for the length of the antenna equipment
- The antenna cable is faulty
- The antenna cable is not connected
- The antenna is faulty
- The lightning protector is faulty
- The antenna cable is connected to the wrong BNC socket (e.g. "DCF-SIM" socket instead of "Antenna")

Case 2:

Effect: There are 7 satellites in the visibility range (**V=07**) but a maximum of 2 appear on the display frame. However, the value of these satellites is 70 or above.

Possible error:

- The visibility range of the antenna to the sky is limited

Case 3:

Effect: The equipment was working perfectly but has not been receiving for several days. 7 satellites appear in the visibility range (**V=07**). However no satellite is displayed.

Possible errors:

- The cable has been damaged
- There was excess voltage on the antenna equipment and the indirect lightning protector is faulty
- Antenna faulty
- The GPS receiver of Control Board 6844(RC) is faulty
- A building change has had an effect on the antenna equipment (e.g. shading of the antenna caused by subsequent building installation, or the laying of cables with a high electrical alternating field in the immediate vicinity of the GPS antenna cable)
- Electronic equipment with an interference effect on the GPS signal has been put into operation in the vicinity of the GPS antenna equipment / GPS receiver (e.g. transmitter for pagers)

Further information on the subject of the GPS antenna equipment can be consulted in the manual "Antenna Equipment GPS".

8.2.6 No DCF77 Antenna Simulation (77.5kHz) / DCF77 Pulse (1Hz)

Description

- A System that is connected to the DCF77 Antenna Simulation or DCF77 pulse does not synchronize.

Cause / Problem Solution

- The System is not synchronous and the timer for the DCF77 Antenna Simulation has lapsed.

8.2.7 No or Incorrect Serial Output

Description

- The connected Systems do not receive a serial string
- The connected Systems receive serial strings with a time that differs from the System

Cause / Problem Solution

- The serial interfaces are not configured correctly (e.g. only transmit on enquiry, UTC output, etc.).
- The connection to the serial interfaces is not correct (e.g. TxD and RxD cables transposed).

8.2.8 Incorrect Time Output

A wrong configuration can cause errors on the output of the local time as well as of the UTC time.



Only the local time can be entered by means of the keypad.

Local Time Description

- Transmitted local time is different from the actual local time

Cause / Problem Solution

- UTC/local time offset set incorrectly or not set
- DST changeover points of time set incorrectly or not set
- Time was set manually, System running in quartz mode
- Time has drifted because the System has been running in quartz mode for a long period
- Local time to UTC time offset differs from the time offset configured in the System 6844(RC) ⇒ Fault on Control Board 6844(RC)

UTC Time Description

- UTC time transmitted differs from the actual UTC time

Cause / Problem Solution

- Time has drifted because the System has been running in quartz mode for a long period
- Time was set manually, System running in quartz mode
Cause of incorrect UTC time on manual setting: incorrect local time entered (the local time must always be entered when setting)
or System incorrectly configured (time offset, DST changeover)

8.2.9 No Daylight Saving Time (DST) Changeover

Description

- "D" for "daylight saving time" (summer time) does not appear on the display
- The bit "daylight saving time" is not set in the status of the data string.

Cause / Problem Solution

- Changeover points of time not set or set incorrectly
- Output/display was configured for UTC and not for local time

8.2.10 Output and Function Errors of Individual Function Boards

The respective board description should be consulted for error analysis of an individual Function Board.

8.3 Support from the *hopf* Company

Should the System demonstrate error descriptions other than those listed in **Chapter 8.2 Error Patterns**, please contact Support at *hopf* Elektronik GmbH with an exact description of the fault and the following information:

- With PCID (Product Config ID) or if not possible with the Serial number of the System
- Occurrence of the error during commissioning or operation
- Values of ERROR-Byte
- Exact error description
- In the case of GPS reception/synchronization problems ⇒ description of the antenna equipment used:
 - Components used (antenna, indirect lightning protector, etc.)
 - Cable type used
 - Total length of the antenna equipment
 - Sequence of components and cable lengths between the components
 - Antenna installation position (e.g. signal shading by building) and
 - Settings and System Status Byte

Please write to the following E-mail address with the above information:

support@hopf.com



Providing a detailed description of the error and the information listed above avoids the need for additional clarification and leads to faster processing by our Support team.

9 Maintenance / Care

The System 6844(RC) is generally maintenance-free. The following points should be noted if it is necessary to clean the System 6844(RC):

9.1 General Guidelines for Cleaning

The following **must not** be used to clean the System 6844(RC):

- Fluids
- Cleaning agents containing solvents
- Cleaning agents containing acids
- Abrasive media

The use of such cleaning agents or media could damage the System 6844(RC)



Do not use a wet cloth to clean the System 6844(RC).
There is the danger of an electric shock.

To clean the System 6844(RC) use a cloth that is:

- Antistatic
- Soft
- Non-fabric
- Damp

9.2 Cleaning the Housing



Make sure that connections or cables are not loosened whilst cleaning the housing of an active system. There is a risk that the system could become damaged and lose functionality.

9.3 Cleaning the Display and Keypad

Minimum pressure should be exerted when cleaning the display and keypad. Excessive pressure may cause mechanical damage.



When cleaning the active System 6844(RC) make sure that System functions are not altered by accidentally pressing a key.

10 Technical Data

10.1 Specific Technical Data for 3U / Table-Top / Wall

Technical Data - System 6844(RC) 3U / Table-Top / Wall	
Housing construction:	Sheet steel / aluminium, closed 3U and Table-Top with ventilation openings for convection on top and bottom
Housing measurement:	Dimensions are housing specifically / see Chapter 1.2.2.1 19 Inch Rack 3U/42HP and 3U/84HP, 1.2.4.1 ½ 19 Inch Table Top Housing 3U/42HP and 1.2.5.1 ½ 19 Inch Wall Housing 3HE/42TE
Housing protection class:	IP20
Protection class:	I, with PE connection. Additional earth screw for cables up to 16mm ²
Cooling:	Convection
Weight:	Dependent on housing

AC Power Supply (with Standard Power Supply)	
Nominal input voltage:	115 / 230V AC / 47-63Hz Connection via input connector compliant with IEC/EN 60320-1/C14 incl. EMI Filter
Current consumption (at nominal values):	approx. 0.7A (115V AC) / 0.4A (230V AC)
Mains failure bridging at nominal load:	> 20msec.
Insulation voltage (EN60950) Input / Output:	3000V _{eff}
Output Data (intern only)	
Internal nominal output voltage:	5V DC
Nominal output current I _N 0°C .. +55°C:	6A (U _{OUT} = 5V DC)
Efficiency:	> 70%
Function display (Power LED):	LED green

DC Power Supply 24V or 48V (Option)	
Nominal input voltage:	24V DC or 48V DC
Input voltage range:	18-36V DC or 36-72V DC
Current consumption (at nominal values):	2.5A or 1.3A
Mains failure bridging at nominal load:	> 3msec.
Insulation voltage (EN60950) Input / Output:	2.000V _{eff}
Output Data (intern only)	
Internal nominal output voltage:	5V DC
Nominal output current I _N 0°C .. +55°C:	6A (U _{OUT} = 5V DC)
Efficiency:	> 70%
Function display (Power LED):	LED green

10.2 Specific Technical Data for 1U

Technical Data - System 6844(RC) 1HE	
Housing construction:	Sheet steel / aluminium, closed
Housing measurement:	see Chapter 1.2.3.1 19 Inch Rack 1U/84HP
Housing protection class:	IP20
Protection class:	I, with PE connection. Additional earth screw for cables up to 16mm ²
Cooling:	Active cooling by fans, temperature-controlled. Air inlets left / right
Weight:	approx. 3kg

AC Power Supply (with wide input range)	
Nominal input voltage:	100-240V AC / 47-63Hz Connection via input connector compliant with IEC/EN 60320-1/C14
Input voltage range:	85-264V AC
Frequency:	47-63Hz
Current consumption (at nominal values):	ca. 0.37A (120V AC) / 0.23A (230V AC)
Starting current:	typ. 15A ($I_O = 100\%$) 120V AC typ. 30A ($I_O = 100\%$) 230V AC
Mains failure bridging at nominal load:	> 20msec. (> 100V AC)
Turn-on time after application of mains voltage:	< 500msec.
Transient overvoltage protection:	Overtoltage category II (EN 60664-1)
Input fuse - internal:	2A (equipment protection)
Recommended pre-fuse:	Line protection switch 6A, 10A characteristic B (EN 60898)
PE leakage current:	< 0.75mA (60Hz, compliant with EN 60950)
Insulation voltage input / PE:	2000V AC, 1 minute, residual current = 10mA, 500V DC, 50MΩ at least (at room temp.)
Output Data (internal only)	
Internal nominal output voltage:	5V DC
Nominal output current I_N 0°C .. +55°C:	6A ($U_{OUT} = 5V$ DC)
Efficiency:	> 74% (at 230V AC and nominal values)
Function display (Power LED):	LED green

DC Power Supply (Option)			
Nominal input voltage:	24V DC	48V DC	110/220V DC
Input voltage range:	18-36V DC	36-76V DC	100-250V DC
Current consumption (at nominal values):	1.36A	0.68A	0.40A
Turn-on time after application of mains voltage:	< 200msec.	< 200msec.	< 500msec.
Input fuse - internal (equipment protection):	4A fast-acting	2A fast-acting	2A
Insulation voltage input / output:	1.500V DC 1 minute, 500V DC 50MΩ at least (20°C ±15°C)	1.500V DC 1 minute, 500V DC 50MΩ at least (20°C ±15°C)	2000V AC, 1 Minute, residual current = 10mA, 500V DC, 50MΩ at least (at room temp.)
Output Data (internal only)			
Internal nominal output voltage:	5V DC	5V DC	5V DC
Nominal output current I _N 0°C ... +55°C	6A (U _{OUT} = 5V DC)	6A (U _{OUT} = 5V DC)	6A (U _{OUT} = 5V DC)
Efficiency:	> 90%	> 90%	> 74%
Function display (Power LED)	LED green	LED green	LED green

10.3 General Technical Data 6844(RC)

General Data	
Operation:	<ul style="list-style-type: none"> • 6844 <ul style="list-style-type: none"> ◦ Via keypad and LCD-Display (illuminated) • 6844RC (Option) <ul style="list-style-type: none"> ◦ <i>hmc</i> Management Console via serial interface with COM0 and separated optional remote interface • 6844MNG (Option) <ul style="list-style-type: none"> ◦ <i>hmc</i> Management Console via network with LAN Management board/module 6844MNG ◦ WebGUI of the LAN Management board/module via Network
Display:	<ul style="list-style-type: none"> • LCD-Display 2x16 digit • Character height 5mm • Display type: alphanumeric • Background illuminated
Keypad:	<ul style="list-style-type: none"> • 3U/Table-Top/Wall: 25 keys • 1U: 20 keys

Environmental Conditions	
Temperature range:	Operation: 0°C to +55°C At higher temperatures, an active cooling / ventilation is recommended. Other temperature ranges can be obtained from the <i>hopf</i> company.
	Storage: -20°C to +75°C
Humidity:	max. 95%, not condensed

CE compliant in accordance with EMC Directive 89/336/EEC and Low Voltage Directive 73/23/EEC

Safety / Low Voltage Directive:	DIN EN 60950-1 : 2006
EMC (Electromagnetic Compatibility) / Interference Resistance:	EN 55022 : 2006 + A1 : 2007 EN 61000-3-2 : 2006 + A2 : 2009 EN 61000-3-3 : 2008 EN 55024 : 1998 + A1 : 2001 + A2 : 2003
Interference voltage EN 55022:	EN 55022 Class B
Interference radiation EN 55022:	EN 55022 Class B

GPS Data

Receiver type:	12 channel phase tracking receiver, C/A code
Evaluation:	L1 frequency (1.575,42MHz)
Sensitivity	
Acquisition:	-143dBm
Tracking:	-156dBm
Synchronization time:	<ul style="list-style-type: none"> Cold start: 5min - 30min (first initialization without position input) Warm start: < 1min (voltage failure < 3 days)
Antenna connection:	<ul style="list-style-type: none"> Via BNC connector, female For active antennas, $U_b = 5V$ DC Antenna power fed via Board 6844(RC) BNC connector

Internal System Accuracy ⁽¹⁾ / System-PPS
(absolute to UTC \Rightarrow radiated from GPS)

Accuracy ⁽²⁾	< \pm 150ns
Jitter / Stability ⁽²⁾	< \pm 20ns/s
Freewheel accuracy ⁽³⁾	< $\pm 1 * 10^{-7}$ (max. 30 minutes after Sync.-Off) (< \pm 0,36msec / hour)
Aging (System-Quartz)	< \pm 5 ppm / year

Backup Clock

Maintenance free buffering of internal backup clock:	at least 3 days / typ. 7 days / max. 10 days
Accuracy:	\pm 25ppm at +10°C to +50°C

Comment

- (1) The System crystal frequency is the leading factor for the generation of system-PPS and 1 kHz (msec) and is thus crucial for the system accuracy.
- (2) after at least 30 minutes of continuous synchronization at constant temperature
- (3) after at least 4 hours continuous synchronization at constant temperature

**Serial Independent Full-duplex Interfaces in RS232 and RS422
COM0 und COM1**

Serial strings with ETX at second change	Baud rate	Accuracy ETX (at System-PPS)
	2400 Baud	+330µs .. +700µs
	4800 Baud	+220µs .. +450µs
	9600 Baud	+160µs .. +250µs
	19200 Baud	+140µs .. +200µs

Signal Outputs (internal)

System-PPS	<ul style="list-style-type: none"> • Signal level: TTL (5V) • Pulse duration: 10msec
1kHz (msec)	<ul style="list-style-type: none"> • Offset (at System-PPS): < ± 2µs • Jitter/Stability: see System-PPS • Signal level: TTL (5V)
DCF77.SYS pulse	<ul style="list-style-type: none"> • Offset (at System-PPS): 0µs < Offset < 8µs • Jitter/Stability: see System-PPS • Signal level: TTL (5V)
DCF77.ADD pulse	<ul style="list-style-type: none"> • Offset (at System-PPS): no Offset • Jitter/Stability: see System-PPS • Signal level: TTL (5V)
IRIG-B.(1)	<ul style="list-style-type: none"> • Offset (at System-PPS): see 1kHz (msec) • Jitter/Stability: see 1kHz (msec) • Signal level: TTL (5V)
IRIG-B.(2)	<ul style="list-style-type: none"> • Offset (at System-PPS): see 1kHz (msec) • Jitter/Stability: see 1kHz (msec) • Signal level: TTL (5V)
Status pulse	<ul style="list-style-type: none"> • Offset (at System-PPS): 90µs < Offset < 110µs • Jitter/Stability: < ± 5µs • Signal level: TTL (5V)
IMP1, IMP2, IMP3, IMP4 (6844RC only)	<ul style="list-style-type: none"> • Offset (at System-PPS): see selected pulse • Jitter/Stability: see selected pulse • Signal level: TTL (5V)

Signal Outputs (external)

DCF77 Antenna Simulation (77.5kHz):	Via BNC connector, female <ul style="list-style-type: none"> • Accuracy: see DCF77.SYS pulse • Signal level: 3-5mV_{pp} at 50Ω • Carrier frequency: 77.5kHz ± 25ppm
-------------------------------------	--

Special production:

Modifications can be made to hardware and software in accordance with customer specifications.



The *hopf* Company reserves the right to modify hardware and software at any time.

11 Appendix

11.1 Factory-Default Values

The following values are set in the system after triggering a DEFAULT:

Function	Legend, Value
Keyword for System-Keypad	is deleted / deactivated
Keyword for <i>hmc</i>	is deleted / deactivated
Keyword for LAN MNG	is deleted / deactivated
System byte 1	00 (without function at present) [hex 00]
System byte 2 (without separated menu)	display: local time display: day of the week- / month- abbreviation LAN MNG board activation: no change
Daylight saving time / standard time changeover	deactivated (00 00 0000)
Difference time	+ 00 hours 00 minutes
SyncOFF Timer	00 hours 55 minutes [hex 0037]
GPS reception mode	3D
GPS Position	N 000° 00,0000 / E 000° 00,0000
Status and pulse output configura- tion (<i>optical coupler</i>)	output: time status (quartz / radio)
DCF77.SYS configuration	time basis: local time [hex 00]
DCF77.ADD Configuration	time basis: UTC [hex 80]
DCF77 High pulse length	200 msec [hex C8]
DCF77 Low pulse length	100 msec [hex 64]
DCF77 TimeOFF Timer	55 minutes [hex 3C]
IRIG-B.(1) digital configuration	local time, not inverted, IEEE1344 [hex 04]
IRIG-B.(1) digital TimeOFF Timer	55 minutes
IRIG-B.(2) digital configuration	UTC, not inverted, IEEE1344 [hex 84]
IRIG-B.(2) digital TimeOFF Timer	55 minutes [hex 3C]
COM0 .. 1 ⇌ phys. Parameter	9600 baud, 8 bit, 1 stop bit, no parity [hex 06]
COM0 .. 1 ⇌ output parameter	time basis: UTC, output without second forerun, ETX immediately, no delay dependent on baud rate, transmission every second [hex D4]
COM0 .. 1 ⇌ output string	<i>hopf</i> 6021 [hex 00]
COM0 .. 1 ⇌ special byte	00 [hex 00]
Pulse configuration IMP 1 .. 4	not inverted; mode 1: operating (ON / OFF) [hex 00]
Digital outputs 1 .. 4 (Routing)	IRIG-B.(1) digital [hex 00]
Quartz value	centre of the quartz value [hex 5A00]

The following settings are not changed from the default setting:



- Activation resp. deactivation of the LAN MNG board for 6844RC
- Configuration of the LAN board 7270 / 7271 / 7272
- Configuration of the slave line board 7406
- Configuration of the frequency board 7530

11.2 GPS (Global Positioning System)

Satellites circumnavigate the earth about twice per day at an altitude of approximately 20,000 km, on 6 different courses and at different angles.

The GPS system was developed based on 18 satellites with 3 replacement satellites. In order to prevent short-term gaps in coverage the number was increased during development to 21 satellites with 3 replacement satellites. Above any point on the skyline, therefore, there are always between 6 and 11 satellites visible. Highly precise atomic clocks are on board every satellite (accuracy min. $1 \cdot 10^{-12}$).

A base frequency of 10.23 MHz is taken from the atomic clocks. The two carrier frequencies used, L1 and L2, are produced from this base frequency.

- Transmission frequency L1 = $154 \cdot \text{Base frequency} = 1575.42 \text{ MHz}$
- Transmission frequency L2 = $120 \cdot \text{Base frequency} = 1227.60 \text{ MHz}$

Each satellite sends all important navigation and system data by modulation on these two carrier frequencies. In the public domain, data transmitted on L1 frequency may be evaluated. The precise time can be calculated from this data by defining the position via the antenna.

The GPS antenna receives the signals of all satellites that are within sighting range above the skyline and forwards them to the GPS receiver via a coaxial cable. 4 satellites are required for continuous time evaluation.

hopf GPS radio-controlled clocks have a **Position-fix function** for difficult antenna positions that do not permit continuous reception from 4 satellites (where satellite signals may be screened by surrounding buildings or in mountain valleys, for example). This function also permits synchronization with only one satellite.

Time calculation

The GPS receiver calculates world time UTC (Universal Coordinated Time) from GPS world time (GPS-UTC) radiated by the satellite, by subtracting the leap seconds; at present (status: January 1999) world time is running 13 seconds behind GPS-UTC time. The difference is not constant and changes with the insertion of leap seconds.

The current standard time for the respective time zone is calculated by the addition of a time offset to the UTC time. The time offset is the time difference between UTC time and the time zone in which the clock system is situated, is set in the clock system by the user during commissioning of the clock.

Any daylight saving time (DST) changeover that is due in the time zone is carried out via a switching function that is to be configured in the clock system.

Advantages/Disadvantages GPS:

- + High accuracy
- + High security against interference
- + Worldwide application possible
- + High security against failure (terrestrial transmitters are often switched off when bad weather conditions prevail at the transmission location)
- + High independent clock accuracy
- Outdoor antenna required
- Limited antenna cable lengths

11.3 DCF77 (German Long-Wave Transmitter Frankfurt 77.5kHz)

DCF77¹ is a time signal that is radiated via a terrestrial long-wave transmitter in Frankfurt, Germany, with a carrier frequency of 77.5kHz.

The transmission of the data is amplitude modulated whereas the transmission of the time information is bit serial.

11.3.1 DCF77 General

The DCF77 signal transmits central European time (CET) or central European summer time (CEST). This time is calculated from UTC plus one hour (CET) or two hours (CEST).

The DCF77 signal contains complete time information: minute, hour, day-of-week and date. The following information is transmitted:

- Local time
- Current time zone (daylight saving time or standard time)
- Announcement bit for daylight saving time (DST) changeover
- Announcement bit for the leap second

If UTC is to be calculated from the local time transmitted by DCF77 then the receiver must know the time offset (local time to UTC). In the CET zone this is +1 hour in an easterly direction. A *hopf* system calculates the correct UTC time from the local time, via the internally set time offset and the DST changeover points.

11.3.1.1 DCF77 Signal Structure

The complete time information is transmitted in every minute. A part of time information is transmitted every second of every minute, with the exception of the 59th second. The missing signal in this second gives notice of an impending minute change in the next second.

The amplitude of the 77.5kHz carrier frequency is reduced from 100% to 25% at the beginning of every second for a duration of 100 or 200ms (amplitude modulation). The beginning of each reduction marks the precise second change.

The duration of reductions of 100 and 200ms (binary 0 and 1) is converted into a BCD code and in this way decodes the transmitted time telegram.

The data string is sub-divided into different groups. Three of them followed by a parity check:


- P1 = parity of minutes
- P2 = parity of hours
- P3 = parity of current day-of-year, day-of-week, month and year

The binary 1's of a group are calculated and supplemented with the parity bit to form an even number.

When valid time information is transferred from CEST, the 17th second mark has a duration of 200ms. One hour before changeover from CEST to CET, or vice-versa, the 16th second mark has a duration of 200ms.

¹ DCF77: **D** = Deutscher (German), **C** = Long-wave transmitter, **F** = Frankfurt, **77** = frequency

The coding is shown in the following illustration:

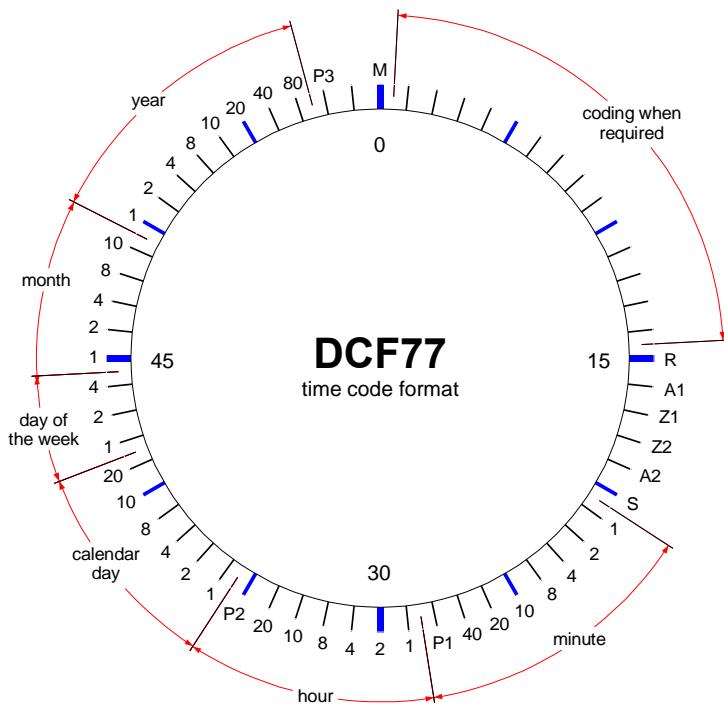

- M** Minute mark (100msec.)
- R** The second mark no. 15 has a duration of 200msec. when radiation takes place via the standby antenna.
- A1** Announcement of an imminent change from CET to CEST or vice-versa.
- Z1, Z2** Time zone bits
- A2** Announcement of a leap second
- S** Start bit of the coded time information
- P1, P2, P3** Test bits

11.3.1.2 Advantages and Disadvantages DCF77

- + DCF77 receivers are generally less expensive than GPS receivers
- + Reception of the legal time in Germany
- + The antenna can be installed inside a building under favorable conditions (no lightning protection or expensive laying of antenna cable is necessary)
- Sensitive to interference signals (atmospheric interference or radiation from electric motors, monitors or other switched, inductive loads)
- Installation limited to within approx. 1500km of Frankfurt, Germany
- Transmitter may be switched off when there is bad weather at the transmission location
- Lower short-term accuracy when compared with GPS

11.3.2 DCF77 Generation by *hopf Clocks*

hopf clocks can simulate the DCF77 signal for other clocks in order to operate DCF77 clocks in locations where the DCF77 signal is not available.

This can be realized as DCF77 antenna simulation (77.5kHz) and also as DCF77 pulse (1Hz).

11.3.2.1 DCF77 Signal Simulation

An analogue, amplitude-modulated carrier signal is generated by the clock system. A connected, standard DCF77 radio-controlled clock is unable to differentiate this signal from an "original" DCF77 signal received via an antenna. It is also possible to use time bases other than only CET/CEST to simulate the signal.

The term **DCF77 Antenna Simulation** or, in short, **DCF77 Sim** is commonly used in *hopf* literature to describe this term.

11.3.2.2 DCF77 Pulse (1Hz)

The DCF77 pulse uses the same coding procedure as that used by the DCF77 signal radiated by the transmitter. The difference lies in the fact that an amplitude-modulated carrier signal is not used for transmission. The 100 and 200msec. long reductions are represented by logical signal levels.

In this digital form the signal can then also be transmitted via a fiber optic cable, for example.